


# **OIL ANALYSIS REPORT**

Sample Rating Trend



**NORMAL** 



Machine Id **51-PC-23 (S/N 60C)** 

Hydraulic System

Skydrol (--- LTR)

### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service. Chlorine is 128 ppm.

				Apr2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
	ATION		IIIIII/Dase		HISTORY	HISTOLYZ
Sample Number		Client Info		WC0804033		
Sample Date		Client Info		05 Apr 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	7		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	<1		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	2		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		2		
Calcium	ppm	ASTM D5185m	110	1		
Phosphorus	ppm	ASTM D5185m	37	50000		
Zinc	ppm	ASTM D5185m		2		
Sulfur	ppm	ASTM D5185m	220	2129		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0		
Sodium	ppm	ASTM D5185m	7.0	1		
Potassium	ppm	ASTM D5185m	>20	20		
Chlorine Content	ppm	ASTM D5185m		128		
Water	%	ASTM D6304	>0.750	0.495		
ppm Water	ppm	ASTM D6304	>7500	4959.3		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1421		
Particles >6μm		ASTM D7647	>1300	469		
Particles >14µm		ASTM D7647	>160	68		
Particles >21µm		ASTM D7647	>40	27		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/13		
FLUID DEGRADA	TION _	method	limit/base	current	history1	history2

0.191



## **OIL ANALYSIS REPORT**

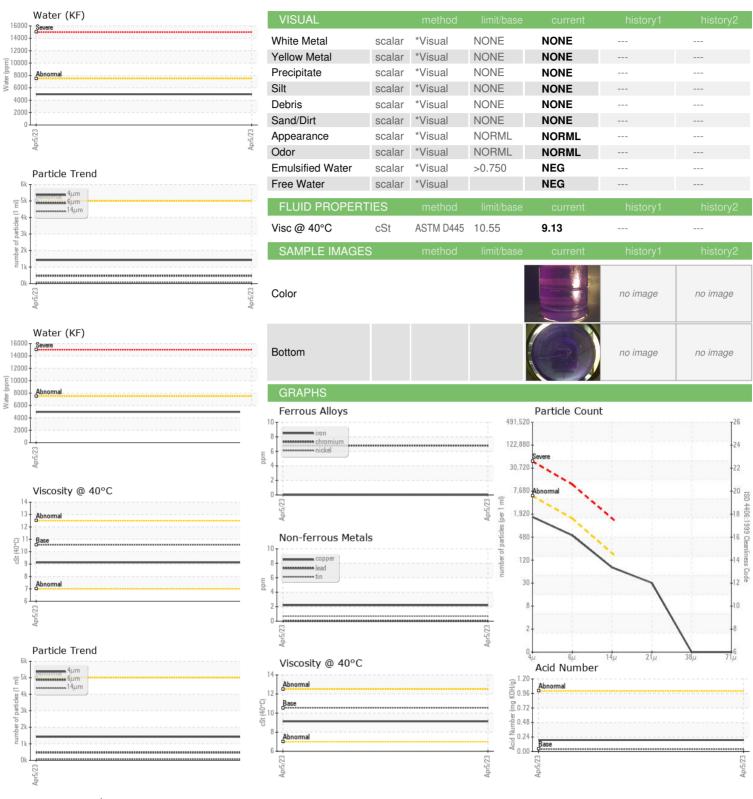



Certificate L2367

Laboratory Sample No. Lab Number

**Unique Number** 

: WC0804033 : 05814268 : 10417060

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received Diagnosed

: 12 Apr 2023 Diagnostician : Jonathan Hester

: 07 Apr 2023

Test Package : PLANT ( Additional Tests: CHLORINEXRF )

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**WOODWARD** 

25200 W RYE CANYON RD SANTA CLARITA, CA

US 91355

Contact: REYNARD GOLDMAN reynard.goldman@woodward.com

T: (661)702-5991

F: