



OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id
2018 NISSAN

Component
Gasoline Engine

Fluid
GASOLINE ENGINE OIL SAE 0W20 (--- QTS)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0806715	---	---
Sample Date	Client Info		05 Apr 2023	---	---
Machine Age	mls	Client Info	8500	---	---
Oil Age	mls	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ATTENTION	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	8	---	---
Chromium	ppm	ASTM D5185m >20	<1	---	---
Nickel	ppm	ASTM D5185m >5	0	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m >2	0	---	---
Aluminum	ppm	ASTM D5185m >40	4	---	---
Lead	ppm	ASTM D5185m >50	0	---	---
Copper	ppm	ASTM D5185m >155	<1	---	---
Tin	ppm	ASTM D5185m >10	0	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 75	35	---	---
Barium	ppm	ASTM D5185m 5	0	---	---
Molybdenum	ppm	ASTM D5185m 100	97	---	---
Manganese	ppm	ASTM D5185m	<1	---	---
Magnesium	ppm	ASTM D5185m 12	728	---	---
Calcium	ppm	ASTM D5185m 2100	725	---	---
Phosphorus	ppm	ASTM D5185m 650	632	---	---
Zinc	ppm	ASTM D5185m 850	829	---	---
Sulfur	ppm	ASTM D5185m 2500	2514	---	---

CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	27	---	---
Sodium	ppm	ASTM D5185m >400	<1	---	---
Potassium	ppm	ASTM D5185m >20	<1	---	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.1	---	---
Nitration	Abs/cm	*ASTM D7624 >20	13.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.9	---	---



OIL ANALYSIS REPORT

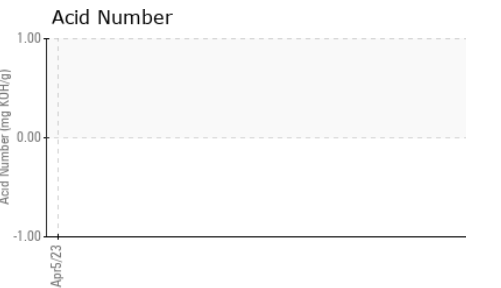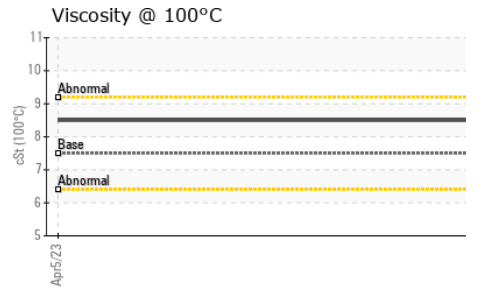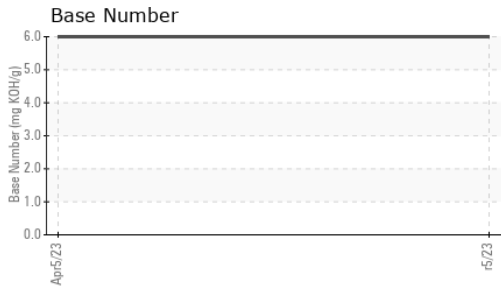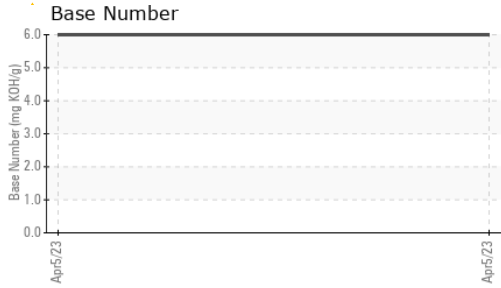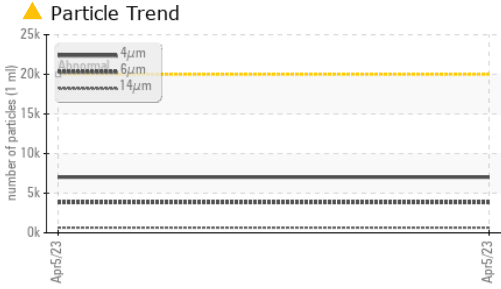



FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	7027	---	---
Particles >6µm	ASTM D7647	>5000	3828	---	---
Particles >14µm	ASTM D7647	>640	▲ 651	---	---
Particles >21µm	ASTM D7647	>160	▲ 219	---	---
Particles >38µm	ASTM D7647	>40	34	---	---
Particles >71µm	ASTM D7647	>10	3	---	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 20/19/17	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	21.8	---	---
Base Number (BN)	mg KOH/g ASTM D2896		6.00	---	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	---	---
Yellow Metal	scalar *Visual	NONE	NONE	---	---
Precipitate	scalar *Visual	NONE	NONE	---	---
Silt	scalar *Visual	NONE	NONE	---	---
Debris	scalar *Visual	NONE	NONE	---	---
Sand/Dirt	scalar *Visual	NONE	NONE	---	---
Appearance	scalar *Visual	NORML	NORML	---	---
Odor	scalar *Visual	NORML	NORML	---	---
Emulsified Water	scalar *Visual	>0.2	NEG	---	---
Free Water	scalar *Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	7.5	8.5	---	---

GRAPHS

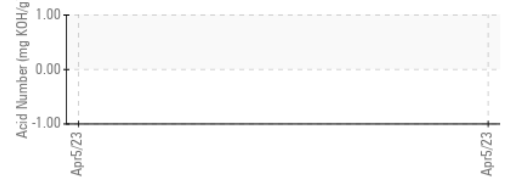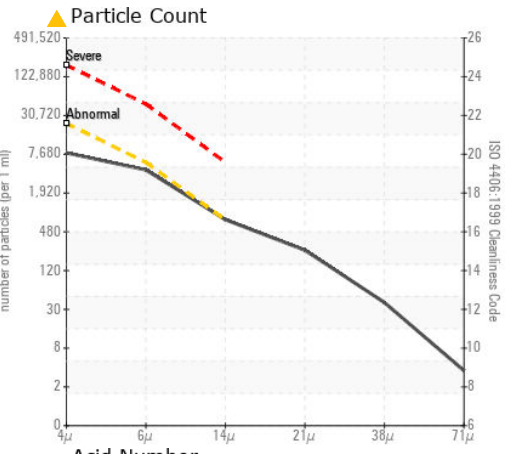

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0806715 **Received** : 07 Apr 2023
Lab Number : 05814721 **Diagnosed** : 13 Apr 2023
Unique Number : 10417513 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: PrtCount, TBN)

BEKAERT
 1396 S MARIETTA PKWY, BLDG 700 SUITE 708
 MARIETTA, GA
 US 30067
 Contact: JEFF MOTHERSBAUGH
 jeff.mothersbaugh@bekaert.com
 T: (803)220-6839
 F: (770)423-9181

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)