




OIL ANALYSIS REPORT

Sample Rating Trend

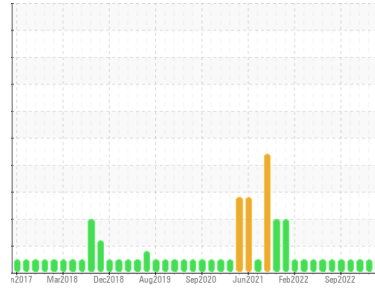

NORMAL



Area
CGE
 Machine Id
CGE
 Component
Starboard Main Engine
 Fluid
CHEVRON DELO 710 LS (350 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			MW0043884	MW0043532	MW0043520
Sample Date	Client Info			04 Apr 2023	11 Feb 2023	19 Dec 2022
Machine Age	hrs	Client Info		17010	15775	14595
Oil Age	hrs	Client Info		17010	15775	14595
Oil Changed	Client Info			Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>4.0	<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	30	27	32
Chromium	ppm	ASTM D5185m	>8	2	<1	2
Nickel	ppm	ASTM D5185m	>2	<1	0	<1
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	0	2	2
Lead	ppm	ASTM D5185m	>18	7	7	10
Copper	ppm	ASTM D5185m	>80	17	13	22
Tin	ppm	ASTM D5185m	>14	6	6	7
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		42	35	34
Barium	ppm	ASTM D5185m		2	0	1
Molybdenum	ppm	ASTM D5185m		53	48	50
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		15	35	10
Calcium	ppm	ASTM D5185m		3606	3199	3267
Phosphorus	ppm	ASTM D5185m		13	20	8
Zinc	ppm	ASTM D5185m		9	11	3
Sulfur	ppm	ASTM D5185m		2307	2023	1952



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	4	4	4
Sodium	ppm	ASTM D5185m	>75	0	2	3
Potassium	ppm	ASTM D5185m	>20	3	1	3

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	0.5	0.8
Nitration	Abs/cm	*ASTM D7624	>20	8.4	8.5	9.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.4	17.2	18.5

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	10.7	10.4	11.6
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	5.3	6.5	6.3







OIL ANALYSIS REPORT

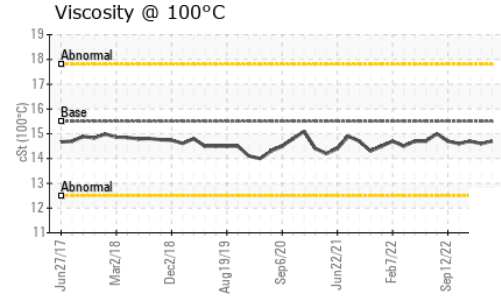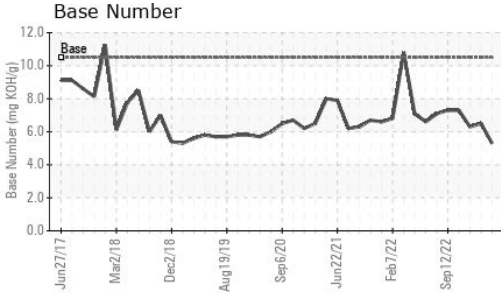

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.5	14.7	14.6	14.7

GRAPHS

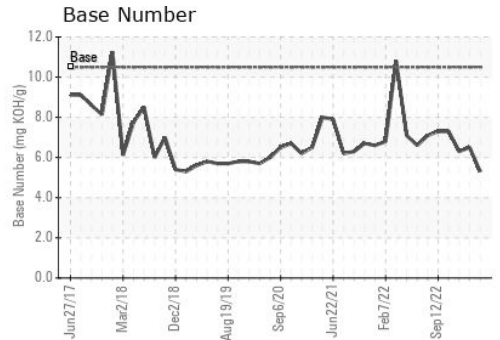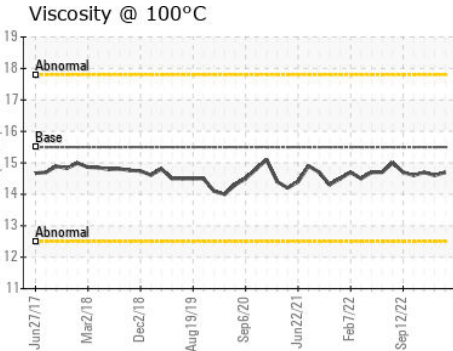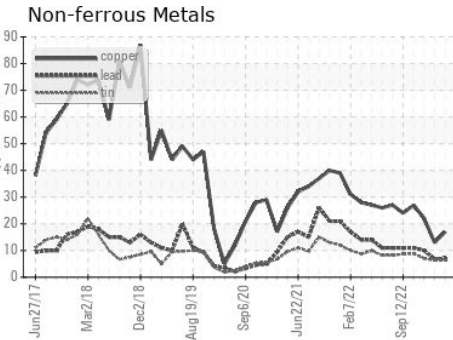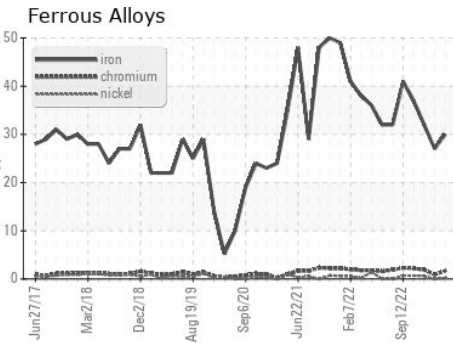

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : MW0043884
 Lab Number : **05820158**
 Unique Number : 10428241
 Test Package : MAR 2

AMERICAN RIVER TRANSPORTATION CO.
 P.O. BOX 2889
 ST. LOUIS, MO
 US 63111
 Contact: BRIAN GRIEWING
 brian.griewing@adm.com
 T:
 F: (314)481-5278

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)