




# OIL ANALYSIS REPORT

Sample Rating Trend

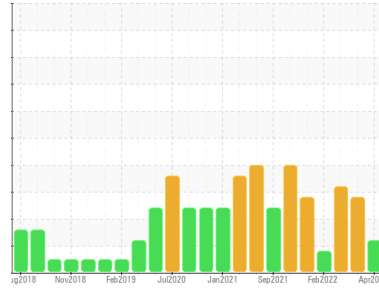

FUEL



Area  
**GUAY SON [CONHER]**  
 Machine Id  
**IBACO BM ISMAR II**  
 Component  
**Diesel Engine**  
 Fluid  
**Diesel Engine Oil (160 LTR)**

## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of fuel present in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>KL0012318</b>	KL0010159	KL0009261	
Sample Date	Client Info	<b>06 Apr 2023</b>	07 Oct 2022	28 Mar 2022	
Machine Age	hrs	Client Info	<b>12975</b>	11147	0
Oil Age	hrs	Client Info	<b>473</b>	11147	0
Oil Changed	Client Info	<b>Not Chngd</b>	N/A	N/A	
Sample Status		<b>ABNORMAL</b>	ABNORMAL	ABNORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	<b>14</b>	12	6
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	2	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	2	<1
Tin	ppm	ASTM D5185m >15	<b>0</b>	1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>162</b>	119	375
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>71</b>	46	106
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>298</b>	171	615
Calcium	ppm	ASTM D5185m	<b>1993</b>	2509	1622
Phosphorus	ppm	ASTM D5185m	<b>944</b>	1114	958
Zinc	ppm	ASTM D5185m	<b>1191</b>	1262	1076
Sulfur	ppm	ASTM D5185m	<b>3975</b>	4990	3018

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>8</b>	▲ 27	8
Sodium	ppm	ASTM D5185m	<b>5</b>	0	<1
Potassium	ppm	ASTM D5185m >20	<b>26</b>	2	0
Fuel	%	ASTM D3524 >5	▲ <b>7.0</b>	▲ 5.3	▲ 3.3


## INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.8</b>	7.1	7.9
Sulfation	Abs/1mm	*ASTM D7415 >30	<b>18.7</b>	18.0	21.6




# OIL ANALYSIS REPORT


▲ Fuel Dilution

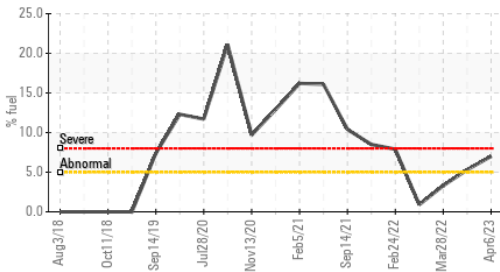


Particle Trend

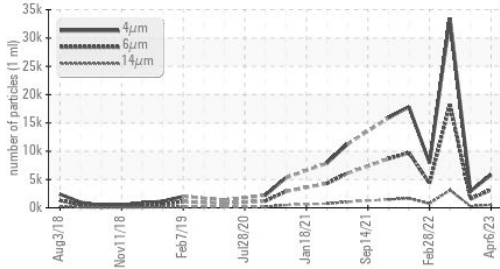


Particle Count

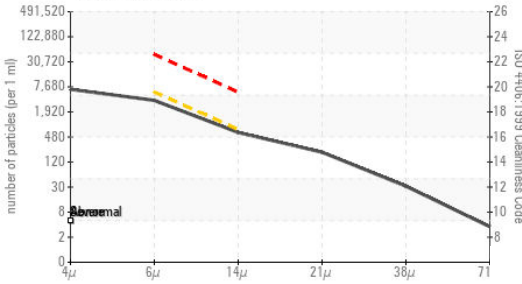

Base Number

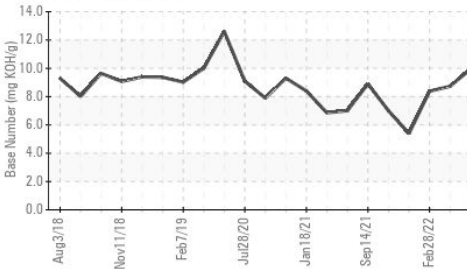

Particle Trend

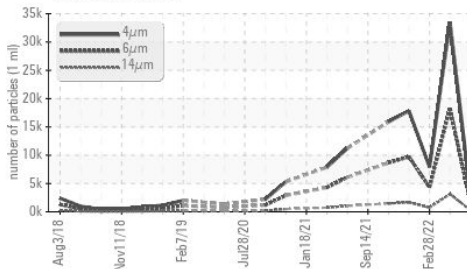

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>5829</b>	2927	33520
Particles >6µm	ASTM D7647	>5000	<b>3175</b>	1595	▲ 18260
Particles >14µm	ASTM D7647	>640	<b>540</b>	271	▲ 3108
Particles >21µm	ASTM D7647	>160	<b>182</b>	91	▲ 1047
Particles >38µm	ASTM D7647	>40	<b>28</b>	14	▲ 162
Particles >71µm	ASTM D7647	>10	<b>3</b>	1	▲ 17
Oil Cleanliness	ISO 4406 (c)	>19/16	<b>19/16</b>	18/15	▲ 21/19


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm *ASTM D7414	>25	<b>14.0</b>	11.4	17.3
Base Number (BN)	mg KOH/g ASTM D2896		<b>11.08</b>	9.94	8.73

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar *Visual		<b>NEG</b>	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445		▲ <b>11.1</b>	▲ 11.2	▲ 12.2

## GRAPHS


Ferrous Alloys

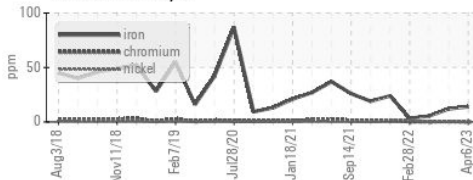


Non-ferrous Metals

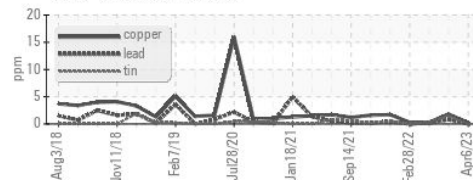


▲ Viscosity @ 100°C

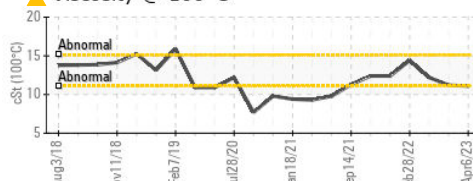

Particle Count

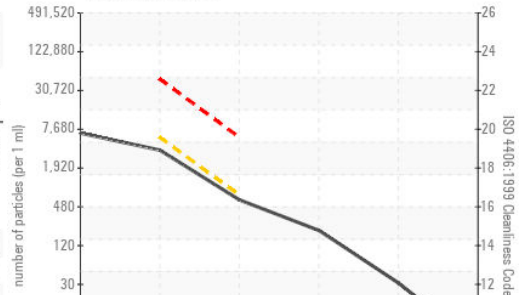

Base Number

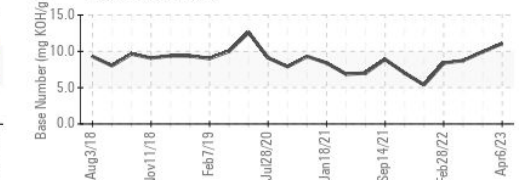

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0012318 **Received** : 14 Apr 2023  
**Lab Number** : 05821124 **Diagnosed** : 19 Apr 2023  
**Unique Number** : 10429207 **Diagnostician** : Jonathan Hester  
**Test Package** : MOB 2 ( Additional Tests: PercentFuel, PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CONOR**  
 JUAREZ 348  
 HERMOSILLO,  
 MX 83140  
 Contact: EDUARDO GARCIA  
 egarcia.comsa@gmail.com  
 T: (526)622-1581 x:81  
 F: x: