




# OIL ANALYSIS REPORT

Sample Rating Trend

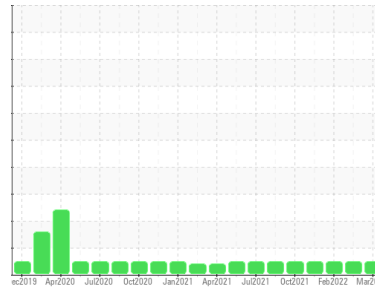

**NORMAL**



Machine Id

**14**

Component

**Diesel Engine**

Fluid

**PURUS SYNTHETIC BLEND 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RW0003999</b>	RW0002988	RW0002834
Sample Date	Client Info		<b>10 Mar 2023</b>	27 May 2022	14 Feb 2022
Machine Age	mls	Client Info	<b>1728472</b>	1678417	1662197
Oil Age	mls	Client Info	<b>16000</b>	16000	16000
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>25</b>	31	30
Chromium	ppm	ASTM D5185m >20	<b>1</b>	1	1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	1
Lead	ppm	ASTM D5185m >40	<b>0</b>	2	<1
Copper	ppm	ASTM D5185m >330	<b>4</b>	6	5
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>5</b>	35	22
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>63</b>	59	61
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>992</b>	734	853
Calcium	ppm	ASTM D5185m	<b>1159</b>	1104	1378
Phosphorus	ppm	ASTM D5185m	<b>1049</b>	997	1070
Zinc	ppm	ASTM D5185m	<b>1309</b>	1105	1282
Sulfur	ppm	ASTM D5185m	<b>3878</b>	2950	2892

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	5	4
Sodium	ppm	ASTM D5185m	<b>2</b>	<1	1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	<1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.9</b>	13.1	11.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.2</b>	23.7	23.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.7</b>	23.4	23.9
Base Number (BN)	mg KOH/g	ASTM D2896 10	<b>9.32</b>	7.86	8.26











# OIL ANALYSIS REPORT

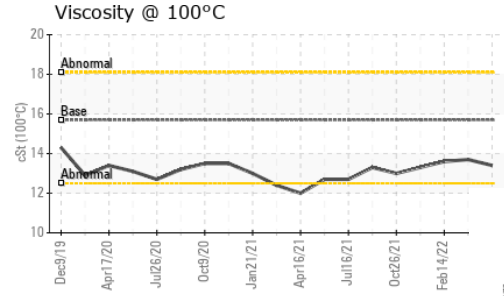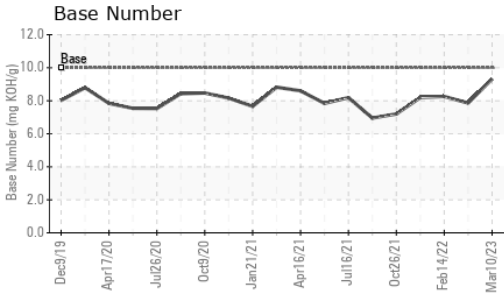

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.7	<b>13.4</b>	13.7	13.6

## GRAPHS

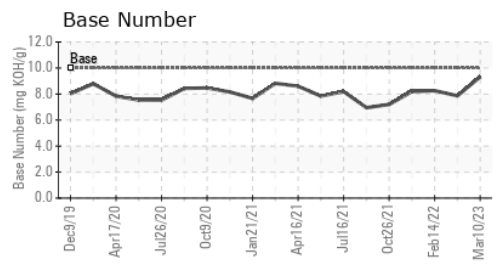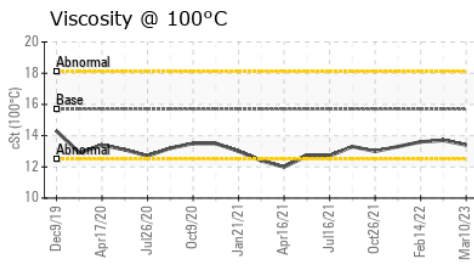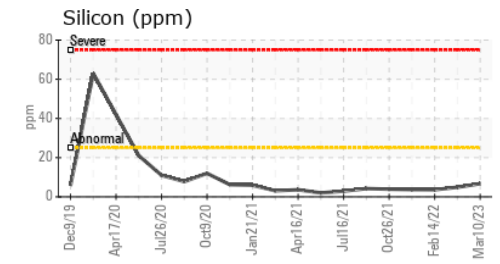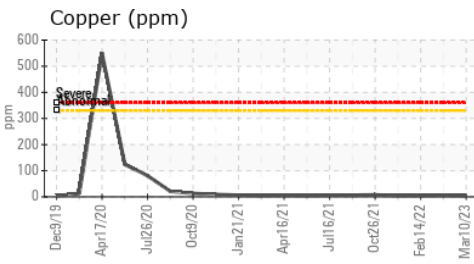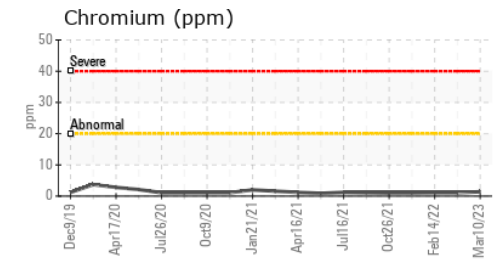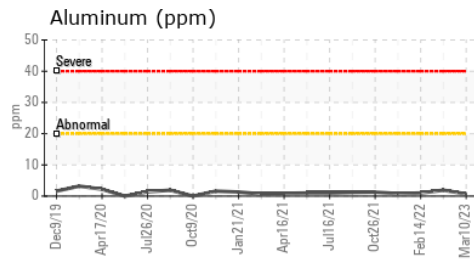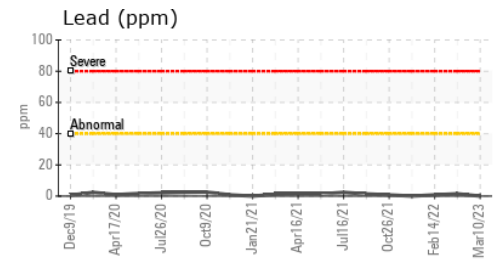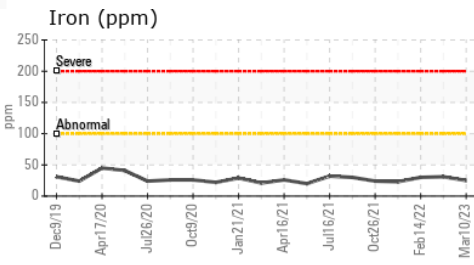

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RW0003999 **Received** : 20 Apr 2023  
**Lab Number** : **05825754** **Diagnosed** : 27 Apr 2023  
**Unique Number** : 10439247 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**BURNETTE FOODS INC**  
 701 US 31 N  
 ELK RAPIDS, MI  
 US 49629  
 Contact: roger WILSON  
 mseguin@burnettefoods.com  
 T: (231)342-3688  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)