



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO

Area  
**GUAY SON/OBREGON [CONHER]**  
 Machine Id  
**Matsuura GSTTK - MAX520-01**  
 Component  
**Cutting Fluid**  
 Fluid  
**Blasomill GT-22 (600 LTR)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the cutting fluid.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the cutting fluid is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KL0011391</b>	---	---
Sample Date	Client Info	<b>13 Apr 2023</b>	---	---
Machine Age	mths Client Info	<b>0</b>	---	---
Oil Age	mths Client Info	<b>4</b>	---	---
Oil Changed	Client Info	<b>Not Chngd</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D6130	<b>10</b>	---	---
Chromium ppm	ASTM D6130	<b>&lt;1</b>	---	---
Nickel ppm	ASTM D6130	<b>0</b>	---	---
Titanium ppm	ASTM D6130	<b>0</b>	---	---
Silver ppm	ASTM D6130	<b>0</b>	---	---
Aluminum ppm	ASTM D6130	<b>0</b>	---	---
Lead ppm	ASTM D6130	<b>0</b>	---	---
Copper ppm	ASTM D6130	<b>0</b>	---	---
Tin ppm	ASTM D6130	<b>0</b>	---	---
Vanadium ppm	ASTM D6130	<b>0</b>	---	---
Cadmium ppm	ASTM D6130	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D6130	<b>0</b>	---	---
Barium ppm	ASTM D6130	<b>0</b>	---	---
Molybdenum ppm	ASTM D6130	<b>0</b>	---	---
Manganese ppm	ASTM D6130	<b>&lt;1</b>	---	---
Magnesium ppm	ASTM D6130	<b>&lt;1</b>	---	---
Calcium ppm	ASTM D6130	<b>76</b>	---	---
Phosphorus ppm	ASTM D6130	<b>1720</b>	---	---
Zinc ppm	ASTM D6130	<b>&lt;1</b>	---	---
Sulfur ppm	ASTM D6130	<b>16578</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D6130	<b>0</b>	---	---
Sodium ppm	ASTM D6130	<b>1</b>	---	---
Potassium ppm	ASTM D6130 >20	<b>0</b>	---	---

## FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	<b>70875</b>	---	---
Particles >6µm	ASTM D7647 >1300	<b>▲ 16401</b>	---	---
Particles >14µm	ASTM D7647 >160	<b>▲ 363</b>	---	---
Particles >21µm	ASTM D7647 >40	<b>43</b>	---	---
Particles >38µm	ASTM D7647 >10	<b>0</b>	---	---
Particles >71µm	ASTM D7647 >3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c) >17/14	<b>▲ 21/16</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045	<b>0.109</b>	---	---



# OIL ANALYSIS REPORT

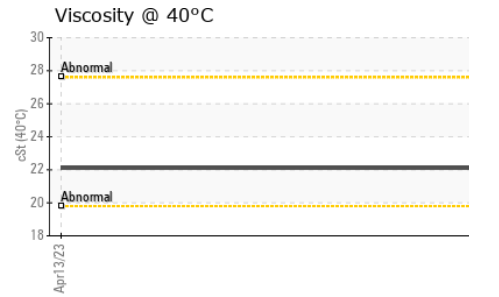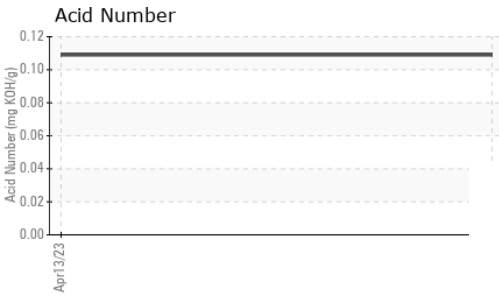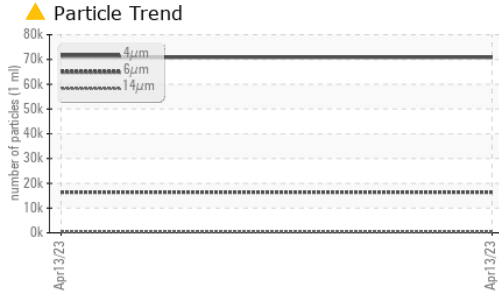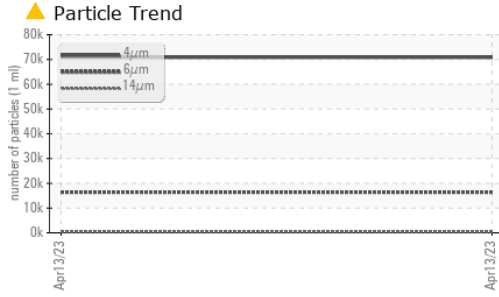






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	NEG	---	---	
Free Water	scalar	*Visual	NEG	---	---	

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	22.1	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

### GRAPHS

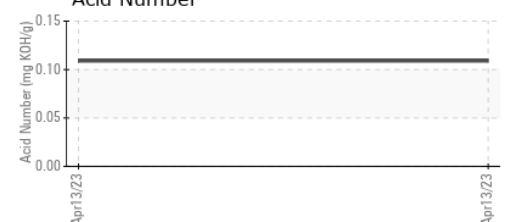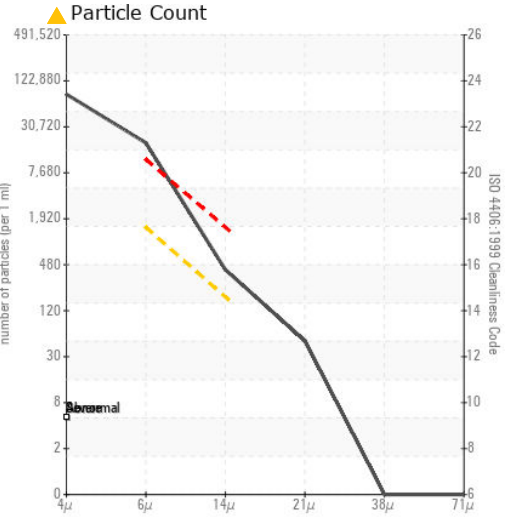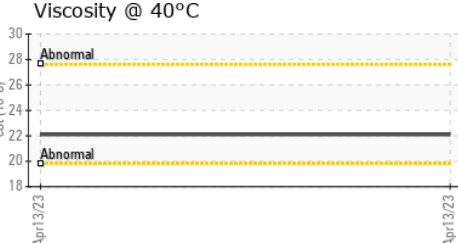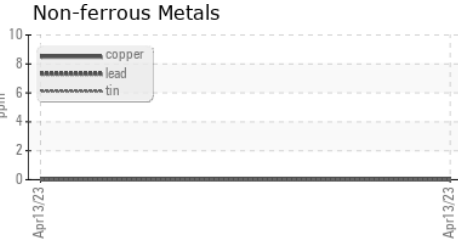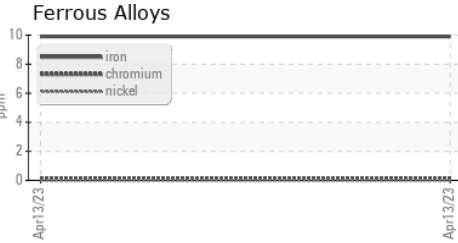

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0011391 **Received** : 21 Apr 2023  
**Lab Number** : 05826233 **Diagnosed** : 24 Apr 2023  
**Unique Number** : 10439726 **Diagnostician** : Angela Borella  
**Test Package** : MOB 2 ( Additional Tests: PrtCount )

**CONOR**  
 JUAREZ 348  
 HERMOSILLO,  
 MX 83140  
 Contact: EDUARDO GARCIA  
 egarcia.comsa@gmail.com  
 T: (526)622-1581 x:81  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)