

OIL ANALYSIS REPORT

Area **NFDM [1718885]** Machine Id **PT11PP02BB01** Component

Bearing Fluid

MOBIL SHC 626 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.




Sample Rating Trend




Nev2018 Apr2019 Jun2019 Occ2019 Mex2020 Occ2020 Apr2021 Occ2022 Apr2023									
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2			
Sample Number		Client Info		WC0805894	WC0747489	WC0629292			
Sample Date		Client Info		20 Apr 2023	29 Oct 2022	21 Oct 2021			
Machine Age		Client Info		0	0	0			
Oil Age		Client Info		0	0	0			
Oil Changed		Client Info		N/A	N/A	N/A			
Sample Status				NORMAL	NORMAL	NORMAL			
WEAR METALS		method	limit/base	current	history1	history2			
Iron	ppm	ASTM D5185m	>200	1	<1	<1			
Chromium	ppm	ASTM D5185m	>15	0	0	0			
Nickel	ppm	ASTM D5185m	>15	0	0	0			
Titanium	ppm	ASTM D5185m		0	0	0			
Silver	ppm	ASTM D5185m		0	<1	0			
Aluminum	ppm	ASTM D5185m	>25	0	<1	<1			
Lead	ppm	ASTM D5185m	>100	0	<1	<1			
Copper	ppm	ASTM D5185m	>200	2	<1	<1			
Tin	ppm	ASTM D5185m	>25	0	<1	0			
Antimony	ppm	ASTM D5185m	>5			0			
Vanadium	ppm	ASTM D5185m		0	0	0			
Cadmium	ppm	ASTM D5185m		0	0	0			
ADDITIVES		method	limit/base	current	history1	history2			
Boron	ppm	ASTM D5185m		0	0	<1			
Barium	ppm	ASTM D5185m		0	<1	0			
Molybdenum	ppm	ASTM D5185m		0	0	0			
Manganese	ppm	ASTM D5185m		<1	<1	0			
Magnesium	ppm	ASTM D5185m		1	0	0			
Calcium	ppm	ASTM D5185m		<1	<1	0			
Phosphorus	ppm	ASTM D5185m		468	458	452			
Zinc	ppm	ASTM D5185m		2	3	0			
Sulfur	ppm	ASTM D5185m		47	59	41			
CONTAMINANTS		method	limit/base	current	history1	history2			
Silicon	ppm	ASTM D5185m		0	<1	0			
Sodium	ppm	ASTM D5185m	200	<1	<1	0			
Potassium	ppm	ASTM D5185m	>20	0	0	0			
VISUAL	pp	method	limit/base	-	history1	history2			
White Metal	scalar	*Visual	NONE	NONE	MODER	NONE			
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE			
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE			
Silt	scalar	*Visual	NONE	NONE	NONE	NONE			
Debris	scalar	*Visual	NONE	NONE	NONE	NONE			
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE			
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML			
Odor	scalar	*Visual	NORML	NORML	NORML	NORML			
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG			
Free Water	scalar	*Visual		NEG	NEG	NEG			



OIL ANALYSIS REPORT

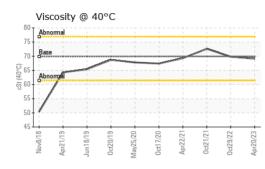

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	69.9	69.1	69.8	72.6
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						

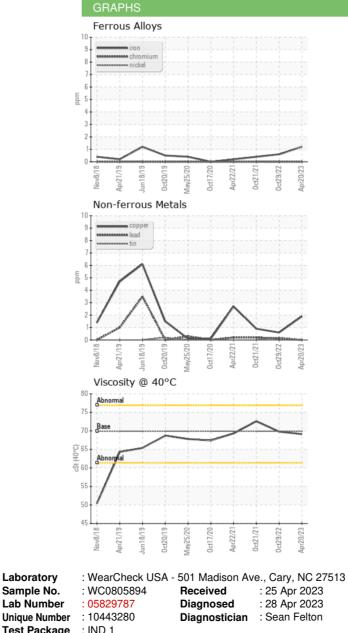

1302 1ST AVE GREELEY, CO US 80631-5909 Contact: ERIC KLINE EKLINE@LEPRINOFOODS.COM T: F: (970)347-5190



Test Package : IND 1 Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: MICHAEL VILLASENOR

LEPRINO FOODS-GREELEY