


PROBLEM SUMMARY

Sample Rating Trend

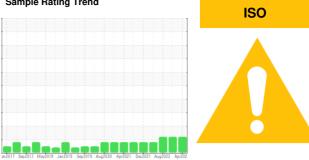


EBAY CD6MGB Component

Main Gearbox

MOBIL MOBILGEAR 600 XP ISO100 (40 GAL)

COMPONENT CONDITION SUMMARY

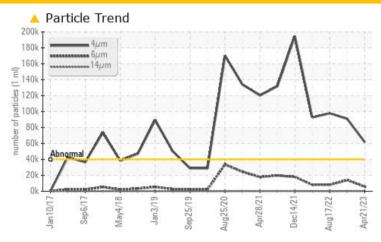

RECOMMENDATION

Resample at the next service interval to monitor. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue.

PROBLEMATIC TEST RESULTS									
Sample Status			ATTENTION	ABNORMAL	ABNORMAL				
Particles >4µm	ASTM D7647	>40000	<u> </u>	4 90837	△ 97898				
Particles >6µm	ASTM D7647	>5000	<u></u> 5814	1 4077	▲ 8070				
Oil Cleanliness	ISO 4406 (c)	>22/19/16	23/20/12	24/21/14	2 4/20/13				

Customer Id: KOBPIN Sample No.: ST44453 Lab Number: 05830718 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Contact Required			?	Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue.

HISTORICAL DIAGNOSIS

19 Jan 2023 Diag: Jonathan Hester



We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



17 Aug 2022 Diag: Doug Bogart





Resample at the next service interval to monitor. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



20 Apr 2022 Diag: Jonathan Hester





We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT



Component **Main Gearbox**

MOBIL MOBILGEAR 600 XP ISO100 (40 GAL)

Sample Rating Trend



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

AL)		an2017 Sep20	7 May2018 Jan2019 Sep2	019 Aug2020 Apr2021 Dec2021 Au	ıg2022 Apr202	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		ST44453	ST44837	ST44248
Sample Date		Client Info		21 Apr 2023	19 Jan 2023	17 Aug 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	58	58	53
Chromium	ppm	ASTM D5185m	>15	<1	<1	<1
Nickel	ppm	ASTM D5185m	>15	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	<1	0
Lead	ppm	ASTM D5185m	>100	0	1	1
Copper	ppm	ASTM D5185m	>200	2	2	<1
Tin	ppm	ASTM D5185m	>25	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		16	16	13
Barium	ppm	ASTM D5185m		0	1	0
Molybdenum	ppm	ASTM D5185m		<1	<1	0
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		2	2	0
Calcium	ppm	ASTM D5185m		6	9	4
Phosphorus	ppm	ASTM D5185m		319	357	323
Zinc	ppm	ASTM D5185m		16	33	<1
Sulfur	ppm	ASTM D5185m		15202	14900	14875
CONTAMINANTS)	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	7	9	9
Sodium	ppm	ASTM D5185m		1	2	1
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water	%	ASTM D6304		0.008	0.004	0.011
ppm Water	ppm	ASTM D6304	>2000	86.5	42.0	115.8
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>40000	<u> </u>	△ 90837	△ 97898
Particles >6μm		ASTM D7647	>5000	<u></u> 5814	<u>▲</u> 14077	<u></u> 8070
Particles >14μm		ASTM D7647	>640	34	111	72
Particles >21µm		ASTM D7647		3	8	12
Particles >38μm		ASTM D7647	>40	0	0	0
Particles >71μm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>22/19/16	<u>^</u> 23/20/12	<u>4</u> 24/21/14	<u>^</u> 24/20/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.70	0.67	0.69



OIL ANALYSIS REPORT

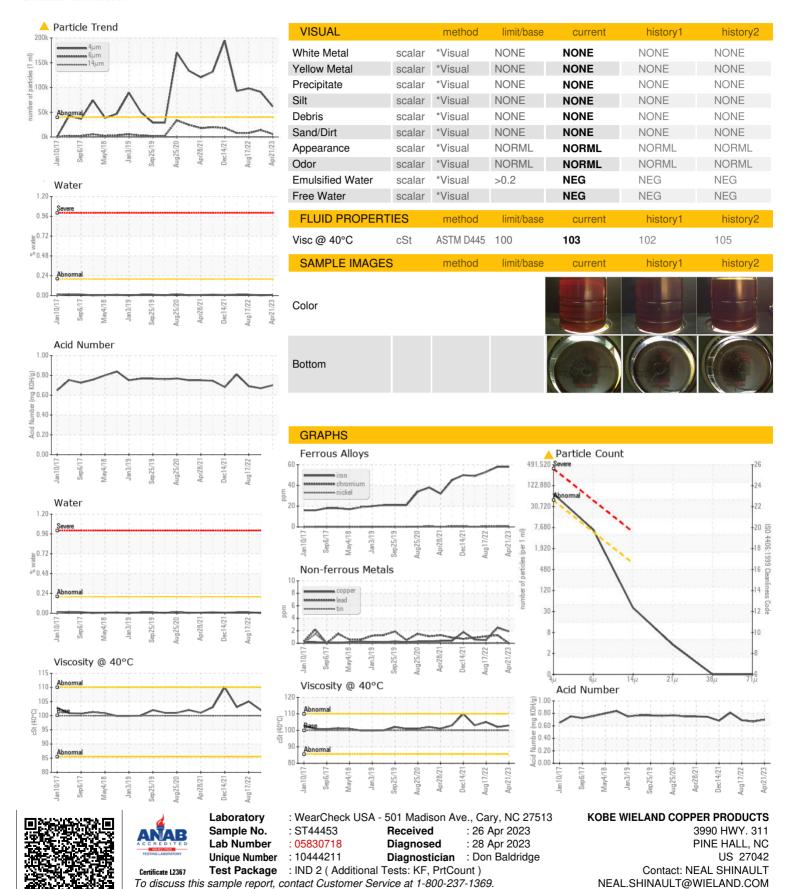

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F:

T: (336)604-1498