



OIL ANALYSIS REPORT

Sample Rating Trend

DEGRADATION



Machine Id
XPDC 139 - CARS24APR2023-225

Component
Oil
Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

▲ Recommendation

The oil is near the end of its useful service life, recommend schedule an oil change. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

▲ Fluid Condition

The AN level is at the top-end of the recommended limit.

SAMPLE INFORMATION	method	limit/base	current	history 1	history 2
Sample Number	Client Info		WC0685924	---	---
Sample Date	Client Info		24 Apr 2023	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

WEAR METALS	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	0	---	---
Chromium	ppm	ASTM D5185m	0	---	---
Nickel	ppm	ASTM D5185m	0	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m	0	---	---
Lead	ppm	ASTM D5185m	0	---	---
Copper	ppm	ASTM D5185m	0	---	---
Tin	ppm	ASTM D5185m	0	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	315	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	0	---	---
Manganese	ppm	ASTM D5185m	<1	---	---
Magnesium	ppm	ASTM D5185m	2	---	---
Calcium	ppm	ASTM D5185m	44	---	---
Phosphorus	ppm	ASTM D5185m	1188	---	---
Zinc	ppm	ASTM D5185m	<1	---	---
Sulfur	ppm	ASTM D5185m	476	---	---






CONTAMINANTS	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	0	---	---
Sodium	ppm	ASTM D5185m	<1	---	---
Potassium	ppm	ASTM D5185m >20	<1	---	---
Water	%	ASTM D6304	0.072	---	---
ppm Water	ppm	ASTM D6304	721.4	---	---

FLUID CLEANLINESS	method	limit/base	current	history 1	history 2
Particles >4µm	ASTM D7647	>5000	1427	---	---
Particles >6µm	ASTM D7647	>1300	331	---	---
Particles >14µm	ASTM D7647	>160	15	---	---
Particles >21µm	ASTM D7647	>40	3	---	---
Particles >38µm	ASTM D7647	>10	1	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	18/16/11	---	---

FLUID DEGRADATION	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	▲ 4.53	---	---



OIL ANALYSIS REPORT

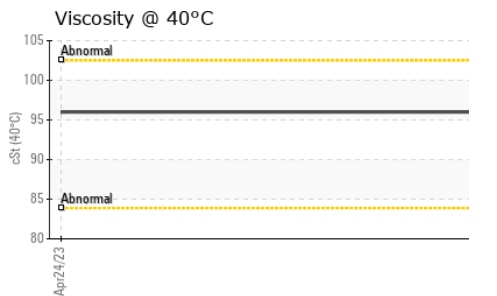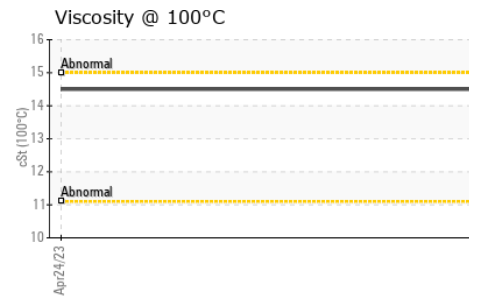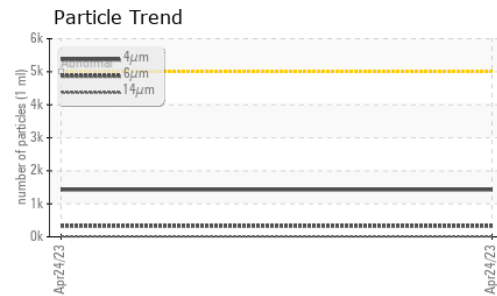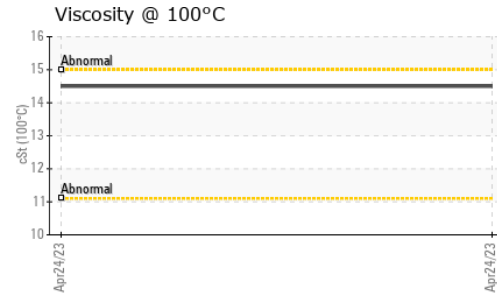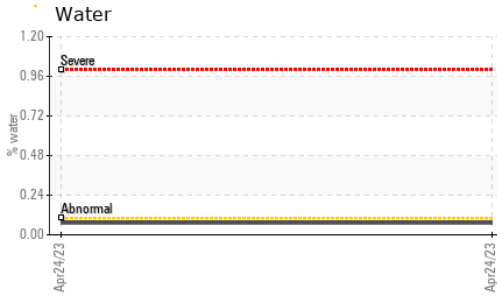






VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	96.0	---	---
Visc @ 100°C	cSt	ASTM D445	14.5	---	---
Viscosity Index (VI)	Scale	ASTM D2270	156	---	---

SAMPLE IMAGES

	method	limit/base	current	history 1	history 2
Color				no image	no image
Bottom				no image	no image

GRAPHS

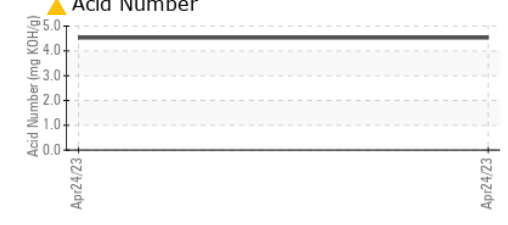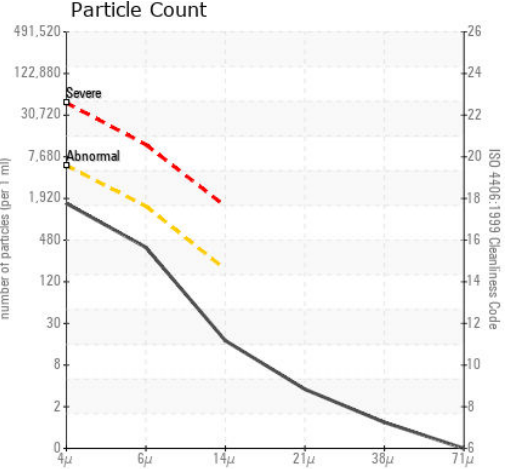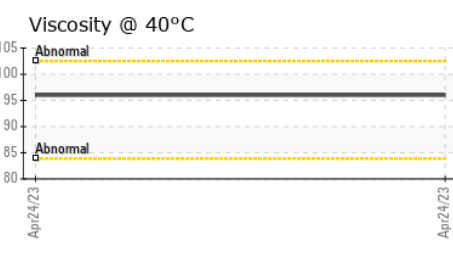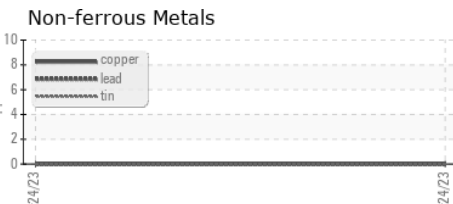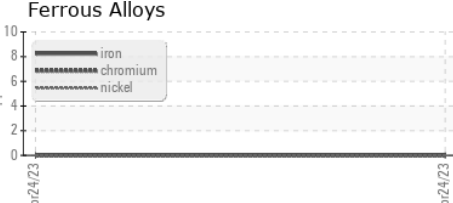

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0685924 **Received** : 26 Apr 2023
Lab Number : 05830722 **Diagnosed** : 01 May 2023
Unique Number : 10444215 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

COMPLIANCE and RESEARCH SERVICES
 1701 WEST FRONT ST
 PLAINFIELD, NJ
 US 07063
 Contact: MATT LARKIN
 blending@complianceandresearch.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)