



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Area

[CONHER]

Machine Id

FREIGHTLINER LAMO - #194 Freightliner

Component

Diesel Engine

Fluid

Mineral 15W40 CI-4 (45 LTR)

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0012340	---	---
Sample Date	Client Info		19 Apr 2023	---	---
Machine Age	kms	Client Info	23491	---	---
Oil Age	kms	Client Info	10000	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			ATTENTION	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	---	---
Glycol	WC Method		NEG	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	24	---	---
Chromium	ppm	ASTM D5185m >6	1	---	---
Nickel	ppm	ASTM D5185m >3	<1	---	---
Titanium	ppm	ASTM D5185m >2	0	---	---
Silver	ppm	ASTM D5185m >2	0	---	---
Aluminum	ppm	ASTM D5185m >50	4	---	---
Lead	ppm	ASTM D5185m >10	0	---	---
Copper	ppm	ASTM D5185m >50	3	---	---
Tin	ppm	ASTM D5185m >6	0	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	51	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	56	---	---
Manganese	ppm	ASTM D5185m	<1	---	---
Magnesium	ppm	ASTM D5185m	810	---	---
Calcium	ppm	ASTM D5185m	1479	---	---
Phosphorus	ppm	ASTM D5185m	1026	---	---
Zinc	ppm	ASTM D5185m	1227	---	---
Sulfur	ppm	ASTM D5185m	3894	---	---

## CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	10	---	---
Sodium	ppm	ASTM D5185m	2	---	---
Potassium	ppm	ASTM D5185m >20	1	---	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624 >20	5.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.7	---	---



# OIL ANALYSIS REPORT

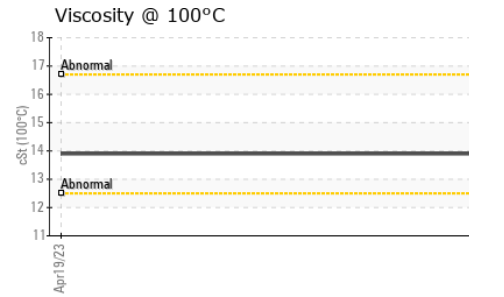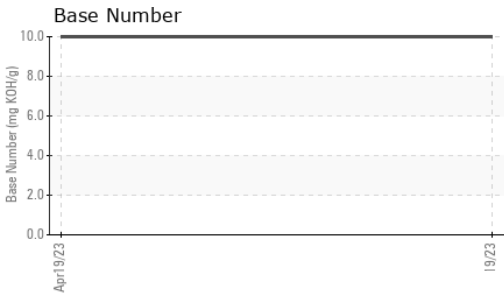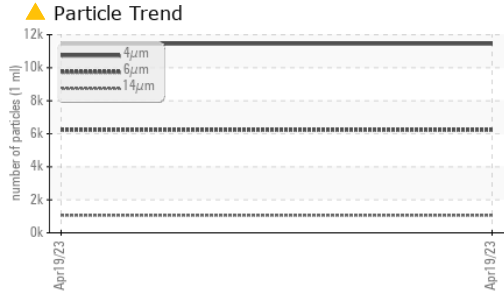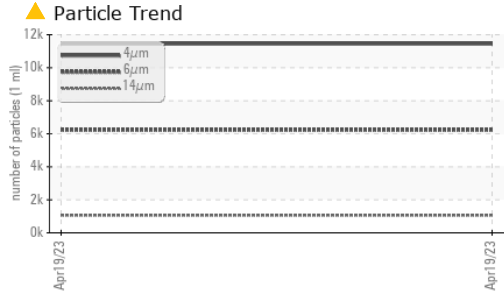





FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>11449</b>	---	---
Particles >6µm	ASTM D7647	>5000	<b>▲ 6237</b>	---	---
Particles >14µm	ASTM D7647	>640	<b>▲ 1061</b>	---	---
Particles >21µm	ASTM D7647	>160	<b>▲ 358</b>	---	---
Particles >38µm	ASTM D7647	>40	<b>▲ 55</b>	---	---
Particles >71µm	ASTM D7647	>10	<b>6</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/16	<b>▲ 20/17</b>	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	<b>13.3</b>	---	---
Base Number (BN)	mg KOH/g ASTM D2896		<b>10.00</b>	---	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar *Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar *Visual	NONE	<b>NONE</b>	---	---
Silt	scalar *Visual	NONE	<b>NONE</b>	---	---
Debris	scalar *Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar *Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar *Visual	NORML	<b>NORML</b>	---	---
Odor	scalar *Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar *Visual	>0.2	<b>NEG</b>	---	---
Free Water	scalar *Visual		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445		<b>13.9</b>	---	---

### GRAPHS

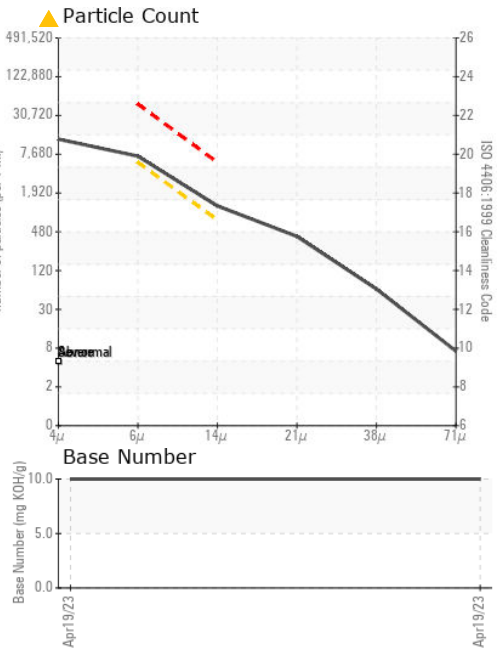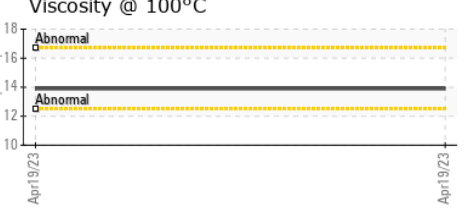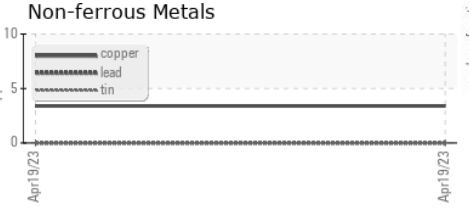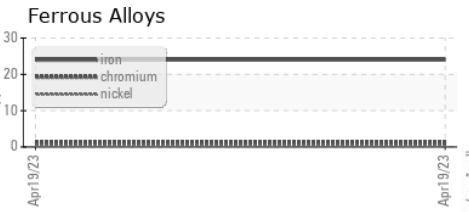

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0012340 **Received** : 27 Apr 2023  
**Lab Number** : 05832160 **Diagnosed** : 01 May 2023  
**Unique Number** : 10445653 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**LAMO**  
 NAVOJOA,  
 MX  
 Contact: ANDRES MONROY  
 andres.monroy@cmoderna.com  
 T:  
 F: