



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**[165915-N2STV4W]**  
 Machine Id  
**ST. THOMAS**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE FM 32 (--- GAL)**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PH05833225</b>	---	---
Sample Date	Client Info		<b>01 Feb 2023</b>	---	---
Machine Age	mths	Client Info	<b>0</b>	---	---
Oil Age	mths	Client Info	<b>9</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>0</b>	---
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	---
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---
Silver	ppm	ASTM D5185m		<b>0</b>	---
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	---
Lead	ppm	ASTM D5185m	>20	<b>0</b>	---
Copper	ppm	ASTM D5185m	>20	<b>0</b>	---
Tin	ppm	ASTM D5185m	>20	<b>0</b>	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	---
Barium	ppm	ASTM D5185m		<b>0</b>	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---
Magnesium	ppm	ASTM D5185m		<b>2</b>	---
Calcium	ppm	ASTM D5185m		<b>2</b>	---
Phosphorus	ppm	ASTM D5185m		<b>577</b>	---
Zinc	ppm	ASTM D5185m		<b>6</b>	---
Sulfur	ppm	ASTM D5185m		<b>666</b>	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>5</b>	---
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---

## FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	<b>3182</b>	---	---
Particles >6µm	ASTM D7647	>2500	<b>376</b>	---	---
Particles >14µm	ASTM D7647	>320	<b>13</b>	---	---
Particles >21µm	ASTM D7647	>80	<b>2</b>	---	---
Particles >38µm	ASTM D7647	>20	<b>0</b>	---	---
Particles >71µm	ASTM D7647	>4	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	<b>19/16/11</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.39</b>	---



# OIL ANALYSIS REPORT

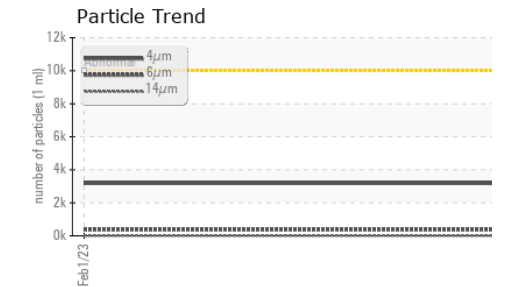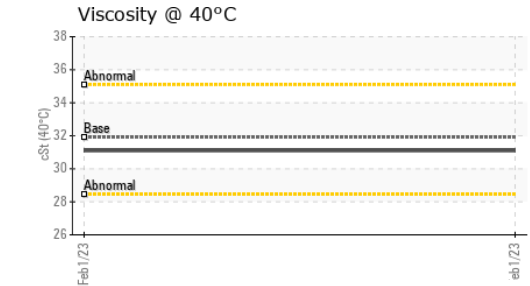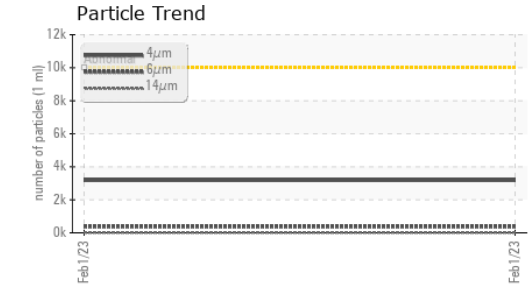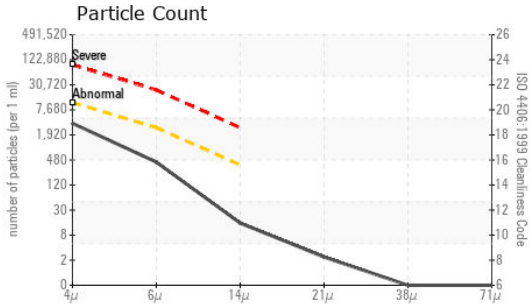

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PH05833225 **Received** : 28 Apr 2023  
**Lab Number** : 05833225 **Diagnosed** : 02 May 2023  
**Unique Number** : 10446718 **Diagnostician** : Jonathan Hester  
**Test Package** : PLANT ( Additional Tests: KF )

**IMRIS**  
 1230 CHASKA CREEK WAY, SUITE 100  
 CHASKA, MN  
 US 55318  
 Contact: JILL BRENINGEN  
 jbreningen@imris.com  
 T: (763)203-6335  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	31.9	31.1	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					
PrtFilter					

## GRAPHS

