
PROBLEM SUMMARY

Area [185984-N2STV4W] 245618

Component Hydraulic System Fluid HLP 46 (40 GAL)

Parker

COMPONENT CONDITION SUMMARY

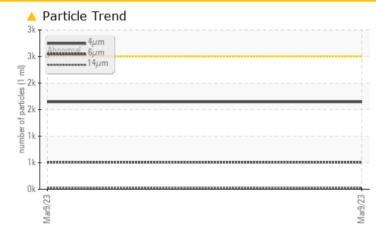

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS							
Sample Status			ATTENTION				
Particles >6µm	ASTM D7647	>320	<u> </u>				
Oil Cleanliness	ISO 4406 (c)	>18/15/12	 18/16/12				
PrtFilter				no image	no image		


Customer Id: CONSAC Sample No.: PH05833857 Lab Number: 05833857 Test Package: PLANT



To manage this report scan the QR code


To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

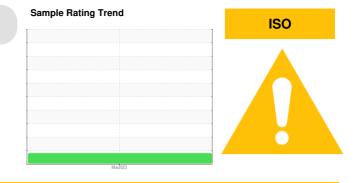

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



Area [185984-N2STV4W] Machine Id 245618 Component

Hydraulic System Fluid HLP 46 (40 GAL)

2ar ker

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.






SAMPLE INFORMATION method limit/base current history1 history2 Sample Number Client Info PH05833857 --- ---

Sample Number		Client Info		PH05833857		
Sample Date		Client Info		09 Mar 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		12568		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron		ASTM D5185m	>20	2		
Chromium	ppm	ASTM D5185m	>20	2		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm		>20	0		
	ppm	ASTM D5185m		-		
Silver	ppm	ASTM D5185m	00	0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	4		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		32		
Phosphorus	ppm	ASTM D5185m		306		
Zinc	ppm	ASTM D5185m		364		
Sulfur	ppm	ASTM D5185m		2171		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	1643		
Particles >6µm		ASTM D7647	>320	<u>▲</u> 508		
Particles >14µm		ASTM D7647	>40	25		
Particles >21µm		ASTM D7647		5		
Particles >38µm		ASTM D7647	>3	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>18/15/12	18/16/12		
						history
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.41		

Report Id: CONSAC [WUSCAR] 05833857 (Generated: 07/13/2023 16:15:31) Rev: 1





OIL ANALYSIS REPORT

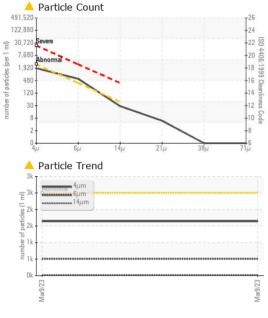

T ²⁶	VISUAL		method	limit/base	current	history1	history2
-24	White Metal	scalar	*Visual	NONE	NONE		
22 8 20 \$	Yellow Metal	scalar	*Visual	NONE	NONE		
-18 19	Precipitate	scalar	*Visual	NONE	NONE		
-16 Cl	Silt	scalar	*Visual	NONE	NONE		
14 D	Debris	scalar	*Visual	NONE	NONE		
+22 1/20 4406:1999 Cleanliness Code +18 99 Cleanliness Code +14 112 20 Code +12 12 20 Code	Sand/Dirt	scalar	*Visual	NONE	NONE		
-8	Appearance	scalar	*Visual	NORML	NORML		
38µ 71µ	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water	scalar	*Visual	>0.05	NEG		
	Free Water	scalar	*Visual		NEG		
-	FLUID PROPERT	IES	method	limit/base	current	history1	history2
	Visc @ 40°C	cSt	ASTM D445		45.1		
	SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Mar9/23	Color					no image	no image
	Bottom					no image	no image
	PrtFilter				•	no image	no image
lar9/23	GRAPHS						
	Ferrous Alloys						
	10iron]			Pa	article Filter (Ma	ian: x)	
8	5 - 5 - nickel					.g,	
		**********		53			
	Mar9/23			Mar9/23			
	Non-ferrous Metals	-					
	¹⁰ T						
F	copper						
	5 - tin			_			
	0	*********					
	Mar9/23			Mar9/23			
	≥ Viscosity @ 40°C						
	55 T				Acid Number		
0	50 - Abnormal			ይ ጀበ40	0		
St (40	45 - Abnormal			(0)H0.6(Will 0.4(0.2(Build Will 0.2(Source 1) Build 0.0(Source 1) Build 0.6(Build			
2	35 ADNormal						
				Mar9/23	9/23		9/23 -
	Mar9/23			Mar	Mar9/23		Mar9/23
Laboratory Sample No. Lab Number Unique Number Test Package	: 05833857 I : 10452660 I : PLANT (Additional	Received Diagnos Diagnost	d : 01 ed : 08 tician : Dou RTFILTERPI	May 2023 May 2023 ug Bogart	3 CON	8825 ELDI SACF	NNOVATIONS ER CREEK RD RAMENTO, CA US 95828 < HENDRICKS

Acid Number

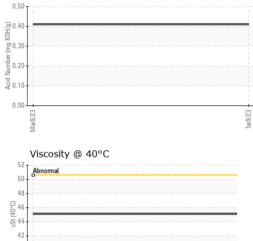



* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

F:

T: (916)212-7081

mark.hendricks@constructioninnovations.com

Certificate L2367