

# **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

# KAESER 5887817

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

## **DIAGNOSIS**

#### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Dec	2021	0ct2022 Apr2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCP53241	KCP46323	KCP43323
Sample Date		Client Info		17 Apr 2023	05 Oct 2022	21 Dec 2021
Machine Age	hrs	Client Info		54145	49496	42596
Oil Age	hrs	Client Info		0	6934	0
Oil Changed		Client Info		Changed	N/A	Changed
Sample Status				ABNORMAL	ATTENTION	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	0	0
Lead	ppm	ASTM D5185m	>10	0	1	<1
Copper	ppm	ASTM D5185m	>50	4	8	14
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	31	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	100	77	29	6
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	0	14	3
Zinc	ppm	ASTM D5185m	0	18	23	32
Sulfur	ppm	ASTM D5185m	23500	23542	22391	17172
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	2	2
Sodium	ppm	ASTM D5185m		39	10	<1
Potassium	ppm	ASTM D5185m	>20	6	2	0
Water	%	ASTM D6304	>0.05	0.019	0.016	0.003
ppm Water	ppm	ASTM D6304	>500	196.1	162.5	33.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		16308	7453	8888
Particles >6µm		ASTM D7647	>1300	<b>4190</b>	<b>1895</b>	<u>4</u> 2492
Particles >14μm		ASTM D7647	>80	<b>174</b>	<b>▲</b> 127	<u> </u>
Particles >21µm		ASTM D7647	>20	<u></u> 431	▲ 31	▲ 38
Particles >38μm		ASTM D7647	>4	2	1	<b>△</b> 5
Particles >71μm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>21/19/15</u>	▲ 20/18/14	<b>△</b> 18/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
	1/011/	10T11 D0015	4.0		0.40	

mg KOH/g ASTM D8045 1.0

Acid Number (AN)


0.40

0.49

0.401



## **OIL ANALYSIS REPORT**

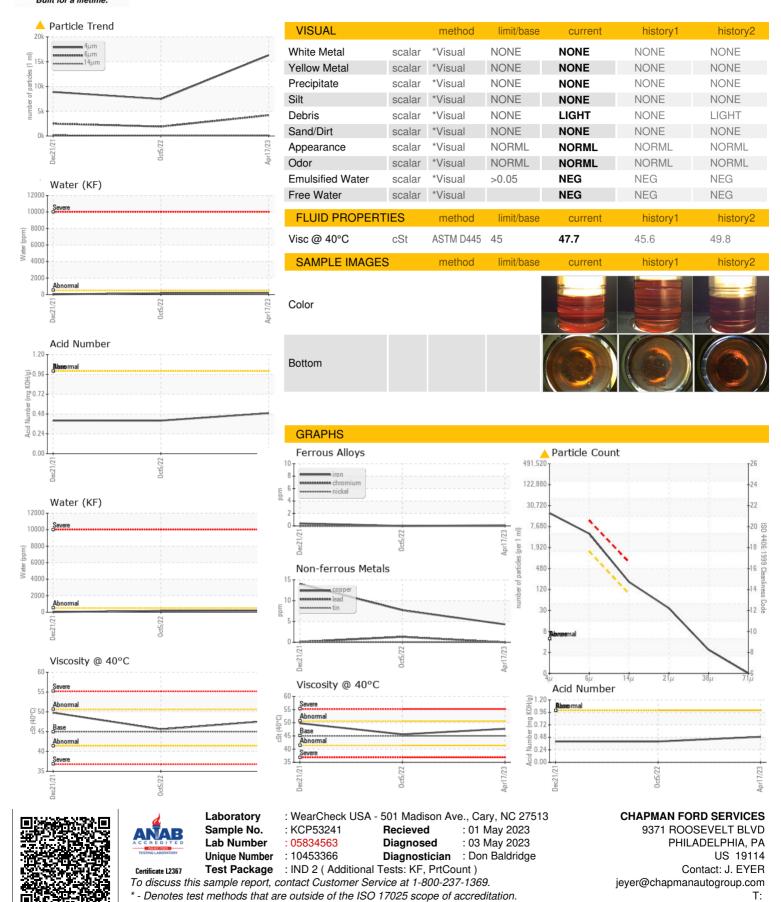

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: