


OIL ANALYSIS REPORT

Sample Rating Trend



ISO

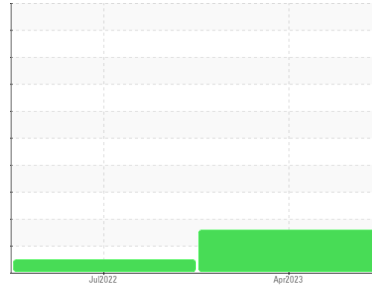

Machine Id
8296519 (S/N 1587)

Component
Compressor

Fluid
KAESER SIGMA (OEM) S-460 (--- QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KC111218	KC90718	---
Sample Date	Client Info	18 Apr 2023	18 Jul 2022	---
Machine Age	hrs	8523	3570	---
Oil Age	hrs	5000	3570	---
Oil Changed	Client Info	Changed	Changed	---
Sample Status		ABNORMAL	NORMAL	---

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	0	<1	---
Chromium	ppm	ASTM D5185m >10	0	0	---
Nickel	ppm	ASTM D5185m >3	<1	0	---
Titanium	ppm	ASTM D5185m >3	0	0	---
Silver	ppm	ASTM D5185m >2	0	0	---
Aluminum	ppm	ASTM D5185m >10	<1	<1	---
Lead	ppm	ASTM D5185m >10	0	<1	---
Copper	ppm	ASTM D5185m >50	6	5	---
Tin	ppm	ASTM D5185m >10	0	<1	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	2	---
Barium	ppm	ASTM D5185m 90	33	55	---
Molybdenum	ppm	ASTM D5185m	0	0	---
Manganese	ppm	ASTM D5185m	<1	<1	---
Magnesium	ppm	ASTM D5185m 90	50	67	---
Calcium	ppm	ASTM D5185m 2	2	5	---
Phosphorus	ppm	ASTM D5185m	3	37	---
Zinc	ppm	ASTM D5185m	6	4	---

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	1	4	---
Sodium	ppm	ASTM D5185m	20	18	---
Potassium	ppm	ASTM D5185m >20	7	17	---
Water	%	ASTM D6304 >0.05	0.012	0.030	---
ppm Water	ppm	ASTM D6304 >500	123.5	302.3	---






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	9980	2308	---
Particles >6µm	ASTM D7647 >1300	▲ 2795	451	---
Particles >14µm	ASTM D7647 >80	▲ 159	20	---
Particles >21µm	ASTM D7647 >20	▲ 25	5	---
Particles >38µm	ASTM D7647 >4	1	0	---
Particles >71µm	ASTM D7647 >3	0	0	---
Oil Cleanliness	ISO 4406 (c) >--/17/13	▲ 20/19/14	18/16/11	---

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	0.28	0.34	---


OIL ANALYSIS REPORT

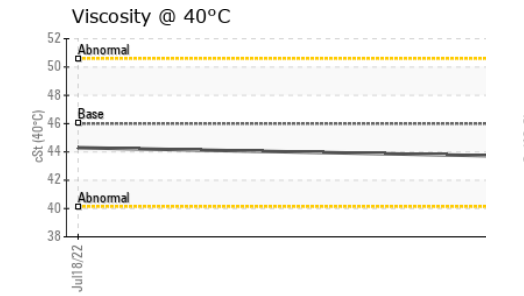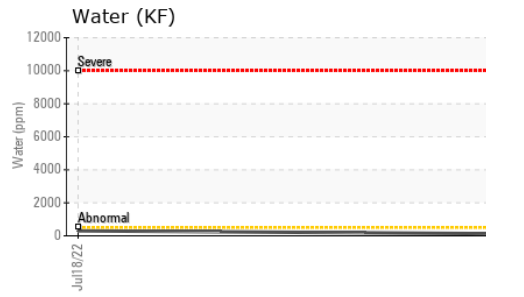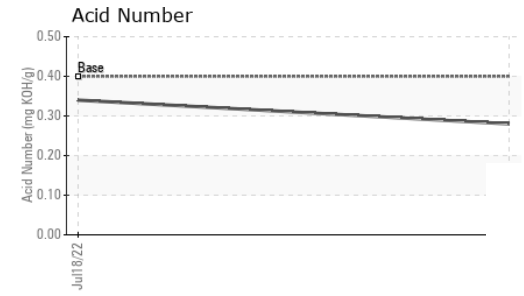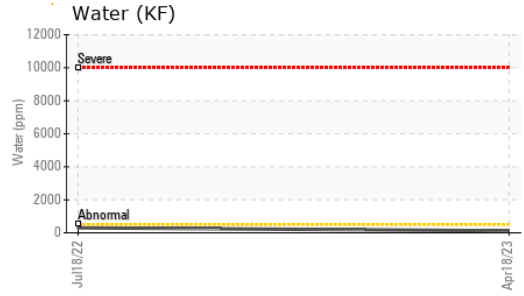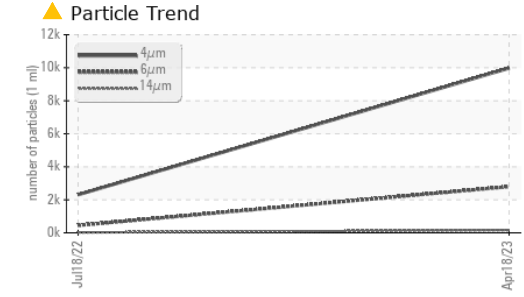






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	43.7	44.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

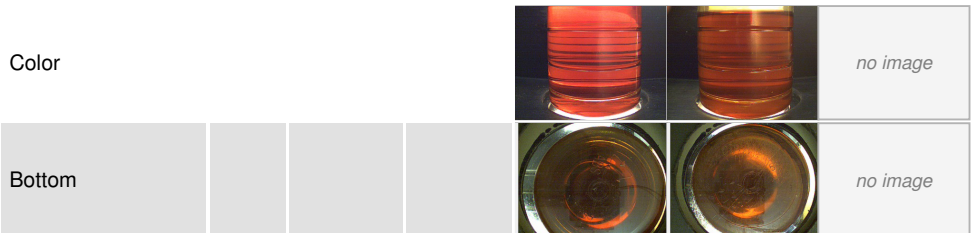

GRAPHS

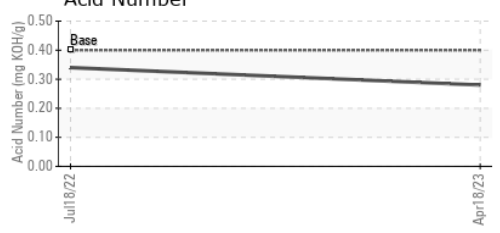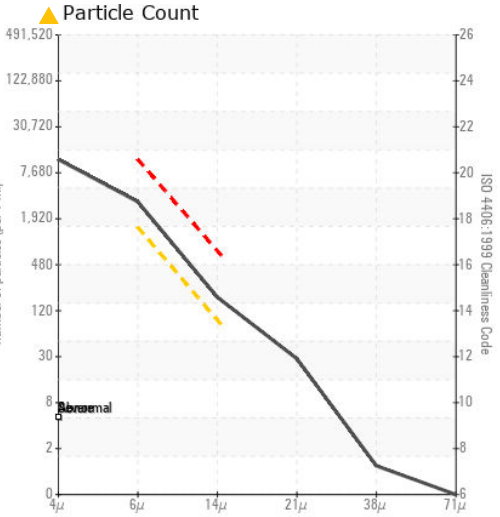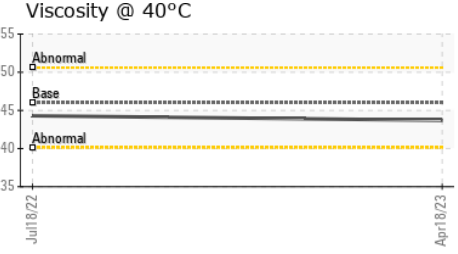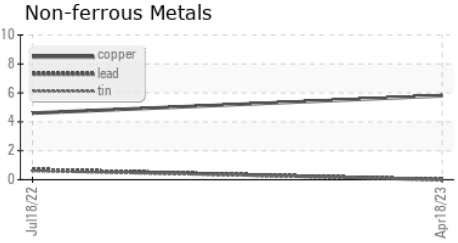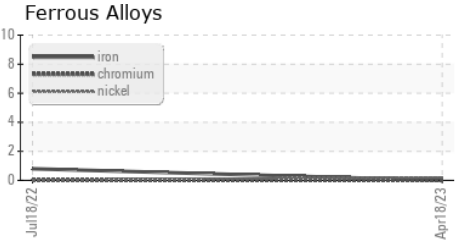

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC111218 **Received** : 01 May 2023
Lab Number : 05834639 **Diagnosed** : 03 May 2023
Unique Number : 10453442 **Diagnostician** : Don Baldrige
Test Package : IND 2

VALTRONICS
 29200 FOUNTAIN PKWY
 SOLON, OH
 US 44139
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)