

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Machine Id **110-03 WC-07 (S/N 206440)** Component

Hydraulic System Fluid CHEVRON RANDO HD 46 (21 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.






| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|------------------|----------|--------------|------------|-------------|----------|----------|
| Sample Number | | Client Info | | PH0000597 | | |
| Sample Date | | Client Info | | 25 Apr 2023 | | |
| Machine Age | hrs | Client Info | | 11148 | | |
| Oil Age | hrs | Client Info | | 11148 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >20 | 0 | | |
| Chromium | ppm | ASTM D5185m | >20 | 0 | | |
| Nickel | ppm | ASTM D5185m | >20 | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >20 | 0 | | |
| Lead | ppm | ASTM D5185m | >20 | 0 | | |
| Copper | ppm | ASTM D5185m | >20 | <1 | | |
| Tin | ppm | ASTM D5185m | >20 | 0 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 0 | | |
| Molybdenum | ppm | ASTM D5185m | | 0 | | |
| Manganese | ppm | ASTM D5185m | | <1 | | |
| Magnesium | ppm | ASTM D5185m | | 4 | | |
| Calcium | ppm | ASTM D5185m | | 18 | | |
| Phosphorus | ppm | ASTM D5185m | | 186 | | |
| Zinc | ppm | ASTM D5185m | | 213 | | |
| Sulfur | ppm | ASTM D5185m | | 520 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >15 | 11 | | |
| Sodium | ppm | ASTM D5185m | | 4 | | |
| Potassium | ppm | ASTM D5185m | >20 | <1 | | |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >2500 | 359 | | |
| Particles >6µm | | ASTM D7647 | >640 | 101 | | |
| Particles >14µm | | ASTM D7647 | >160 | 9 | | |
| Particles >21µm | | ASTM D7647 | >40 | 2 | | |
| Particles >38µm | | ASTM D7647 | >10 | 0 | | |
| Particles >71µm | | ASTM D7647 | >3 | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >18/16/14 | 16/14/10 | | |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.21 | | |



OIL ANALYSIS REPORT

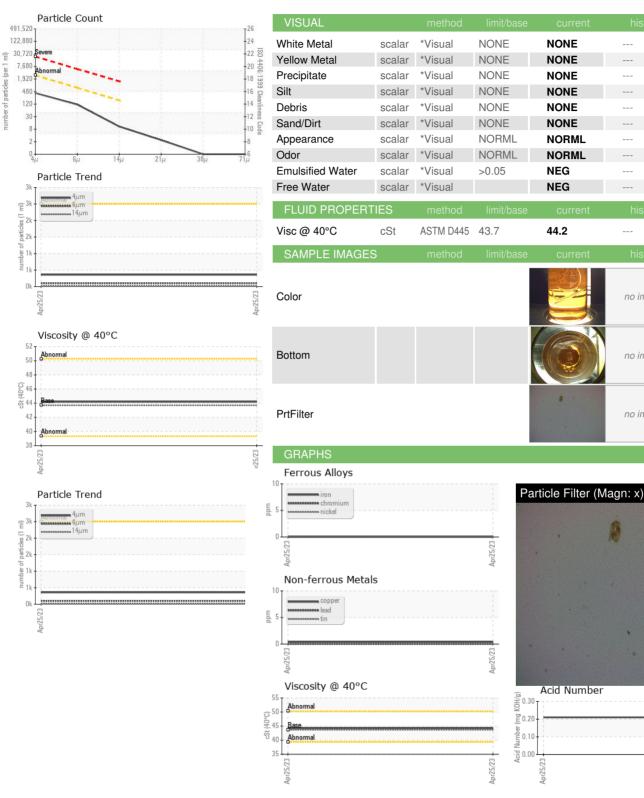

SMC LTD 3250 BRICKWAY BLVD SANTA ROSA, CA US 95403 Contact: SUSAN BENNETT susan.bennett@smcltd.com T: F:



Test Package : PLANT (Additional Tests: KF) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

: PH0000597

: 05837733

: 10456536

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

: 04 May 2023

: 09 May 2023

Diagnostician : Doug Bogart

Received

Diagnosed

Report Id: SMCSAN [WUSCAR] 05837733 (Generated: 08/04/2023 15:33:27) Rev: 1

Laboratory

Sample No.

Lab Number

Unique Number

Contact/Location: SUSAN BENNETT - SMCSAN

no image

no image

no image

no image

no image

no image