

## **OIL ANALYSIS REPORT**

Sample Rating Trend



Area 97 Machine Id [97] A97 V124 Component Center Agitator Gearbox Fluid Gear Life 220 (6 GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Sep202	2 Nov2022	Feb 2023 A	or2023	
SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history 1	history 2
Sample Number		Client Info		HPL0002814	HPL0001178	HPL0001735
Sample Date		Client Info		28 Apr 2023	06 Feb 2023	04 Nov 2022
Machine Age	hrs	Client Info		152160	150540	148920
Oil Age	hrs	Client Info		4860	0	14100
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				NORMAL	NORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>150	33	36	101
Chromium	ppm	ASTM D5185m	>10	<1	<1	1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	<1
Lead	ppm	ASTM D5185m	>100	0	<1	<1
Copper	ppm	ASTM D5185m	>50	0	<1	<1
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		35	44	129
Calcium	ppm	ASTM D5185m		273	333	922
Phosphorus	ppm	ASTM D5185m		260	287	634
Zinc	ppm	ASTM D5185m		157	189	574
Sulfur	ppm	ASTM D5185m		16801	18380	15088
CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>50	3	2	6
Sodium	ppm	ASTM D5185m		0	1	2
Potassium	ppm	ASTM D5185m	>20	0	<1	0
FLUID CLEANLIN	IESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647	>20000	19795		
Particles >6µm		ASTM D7647	>5000	1409		
Particles >14 $\mu$ m		ASTM D7647	>640	12		
Particles >21µm		ASTM D7647	>160	3		
Particles >38µm		ASTM D7647	>40	0		
Particles >71µm		ASTM D7647	>10	0		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	21/18/11		
FLUID DEGRADA	TION	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.18	0.22	0.74




# **OIL ANALYSIS REPORT**







VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPER1	TIES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445		241	244	▲ 325
SAMPLE IMAGES	S	method	limit/base	current	history 1	history 2
Color				no image	no image	
Bottom				no image	no image	

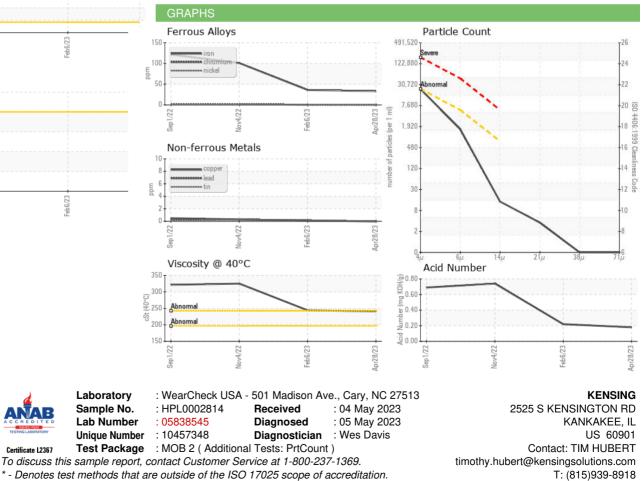

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

F: x: