


PROBLEM SUMMARY

Sample Rating Trend

ISO

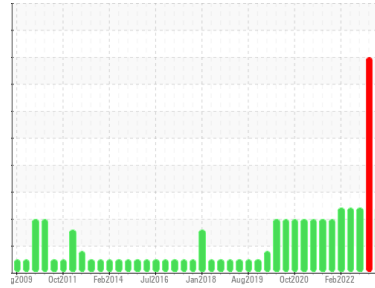


Machine Id
455.XX414

Component
Hydraulic System

Fluid
MOBIL NYVAC FR 200 FLUID (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

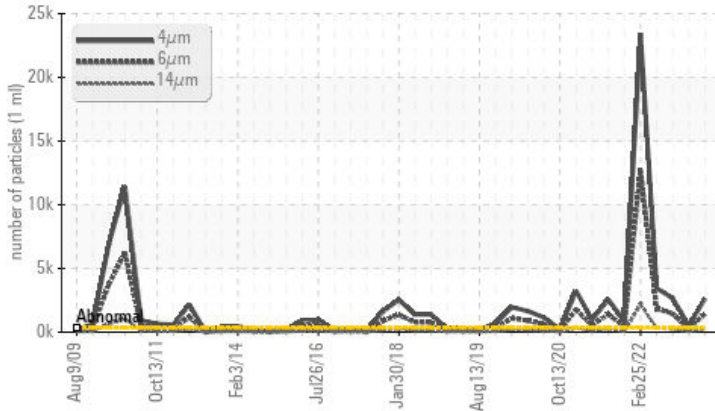

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	SEVERE	ABNORMAL
Particles >4µm	ASTM D7647	>320	▲ 2636	504	▲ 2645
Particles >6µm	ASTM D7647	>80	▲ 1436	▲ 275	▲ 1441
Particles >14µm	ASTM D7647	>20	▲ 244	▲ 47	▲ 245
Particles >21µm	ASTM D7647	>4	▲ 82	▲ 16	▲ 83
Particles >38µm	ASTM D7647	>3	▲ 13	▲ 2	▲ 13
Oil Cleanliness	ISO 4406 (c)	>15/13/11	▲ 19/18/15	▲ 16/15/13	▲ 19/18/15

Customer Id: WEYNEW
Sample No.: RP0000828
Lab Number: 05842174
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Angela Borella +1 800-237-1369
angela.borella@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS

18 Apr 2023 Diag: Jonathan Hester

WEAR



We recommend you service the filters on this component. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition. The iron level is severe. There is a high amount of particulates present in the oil. The pH level of this fluid is within the acceptable limits. pH is 9.00.

view report



25 Jan 2023 Diag: Jonathan Hester

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The pH level of this fluid is within the acceptable limits. The condition of the oil is acceptable for the time in service. pH 9.0.

view report



18 May 2022 Diag: Jonathan Hester

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The pH level of this fluid is within the acceptable limits. The condition of the oil is acceptable for the time in service. pH 8.0.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

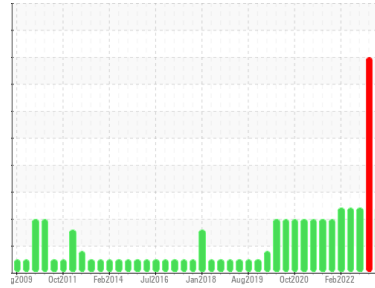

ISO



Machine Id
455.XX414

Component
Hydraulic System

Fluid
MOBIL NYVAC FR 200 FLUID (--- GAL)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The pH level of this fluid is within the acceptable limits. The condition of the oil is acceptable for the time in service. pH 8.0.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		RP0000828	RP0000830	RP0000824
Sample Date	Client Info		08 May 2023	18 Apr 2023	25 Jan 2023
Machine Age	days	Client Info	0	0	0
Oil Age	days	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	SEVERE	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<1	540	2
Chromium	ppm	ASTM D5185m >20	<1	2	0
Nickel	ppm	ASTM D5185m >20	<1	2	4
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	2	0	0
Aluminum	ppm	ASTM D5185m >20	0	0	0
Lead	ppm	ASTM D5185m >20	<1	0	0
Copper	ppm	ASTM D5185m >20	<1	<1	0
Tin	ppm	ASTM D5185m >20	<1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	2	2	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	4	26	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	0
Manganese	ppm	ASTM D5185m	<1	3	<1
Magnesium	ppm	ASTM D5185m	4	3	4
Calcium	ppm	ASTM D5185m	4	11	8
Phosphorus	ppm	ASTM D5185m	13	18	31
Zinc	ppm	ASTM D5185m	23	69	32

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<1	4	<1
Sodium	ppm	ASTM D5185m	1	42	3
Potassium	ppm	ASTM D5185m >20	0	4	1
Water	%	ASTM D6304 >55	43.7	42.6	39.9
ppm Water	ppm	ASTM D6304 >55000	437000	426000	399000

FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>320	▲ 2636	504	▲ 2645
Particles >6µm	ASTM D7647	>80	▲ 1436	▲ 275	▲ 1441
Particles >14µm	ASTM D7647	>20	▲ 244	▲ 47	▲ 245
Particles >21µm	ASTM D7647	>4	▲ 82	▲ 16	▲ 83
Particles >38µm	ASTM D7647	>3	▲ 13	▲ 2	▲ 13
Particles >71µm	ASTM D7647	>3	1	0	1
Oil Cleanliness	ISO 4406 (c)	>15/13/11	▲ 19/18/15	▲ 16/15/13	▲ 19/18/15

OIL ANALYSIS REPORT


▲ Particle Trend

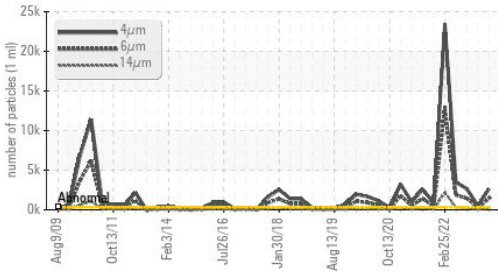


Water

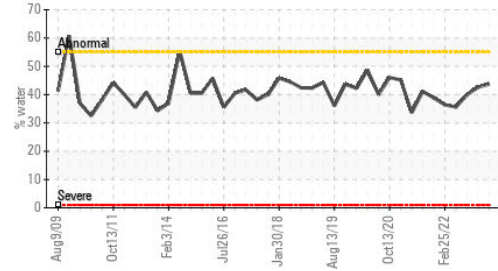


Reserve Alkalinity

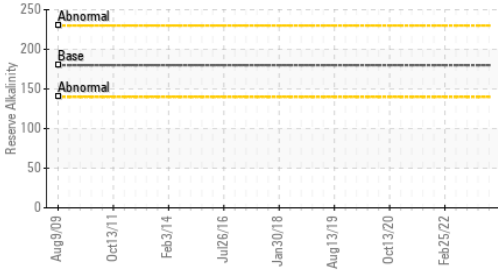

Viscosity @ 40°C

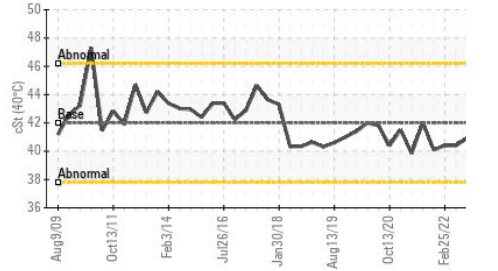

Reserve Alkalinity

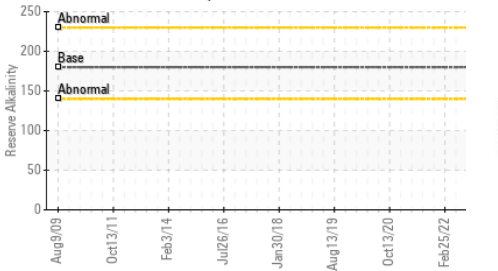

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>55	0.2%	0.2%
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
pH	Scale 0-14	ASTM D1287	8.00	9.00	9.00
Visc @ 40°C	cSt	ASTM D445	42	40.02	40.9

SAMPLE IMAGES


method	limit/base	current	history1	history2
Color				
Bottom				

GRAPHS


Ferrous Alloys

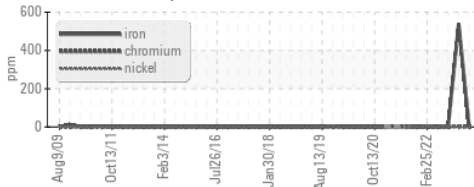


Non-ferrous Metals

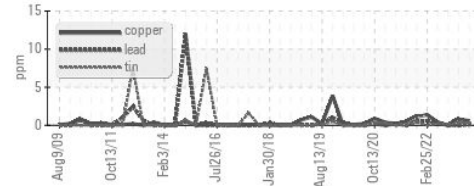


Viscosity @ 40°C

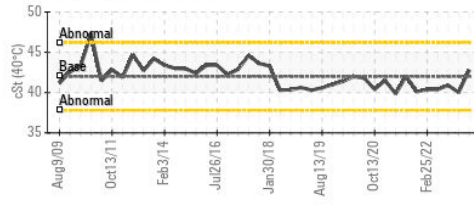

▲ Particle Count

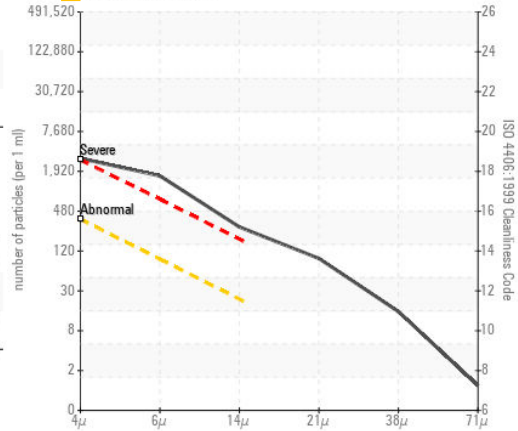

Acid Number

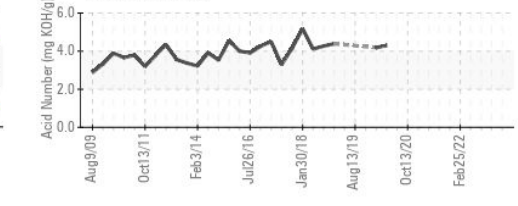

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RP0000828 **Received** : 09 May 2023
Lab Number : 05842174 **Diagnosed** : 11 May 2023
Unique Number : 10466281 **Diagnostician** : Angela Borella

Test Package : IND 2 (Additional Tests: pH, ReserveAlk)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

INTERNATIONAL PAPER
 1785 Weyerhaeuser Road
 VANCEBORO, NC
 US 28586

Contact: DOUG WEIR
 Doug.Weir@paper.com;jon.fazenbaker@wearcheck.com

T: (252)633-7350
 F: (252)633-7761