


PROBLEM SUMMARY

Sample Rating Trend

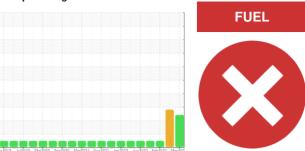


Machine Id


MANITOWOC MLC 300 015-0067

Diesel Engine

SCHAEFFER SUPREME 7000 (12 GAL)

COMPONENT CONDITION SUMMARY

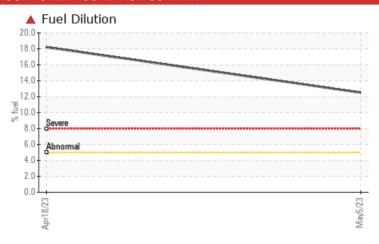

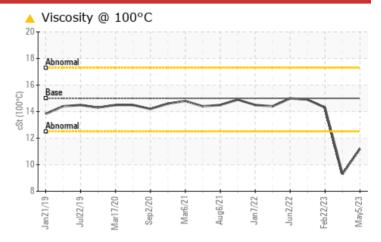

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS								
Sample Status				SEVERE	SEVERE	NORMAL		
Fuel	%	ASTM D3524	>5	12.5	▲ 18.2	<1.0		
Visc @ 100°C	cSt	ASTM D445	15	<u> </u>	9.3	14.3		

Customer Id: AECCHATN Sample No.: WC0815147 Lab Number: 05842578 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data: Wes Davis +1 905-569-8600 x223 wesd@wearcheck.ca

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Fluid	MISSED	Jun 23 2023	?	We recommend that you drain the oil from the component if this has not already been done.		
Resample	MISSED	Jun 23 2023	?	We recommend an early resample to monitor this condition.		
Check Fuel/injector System	MISSED	Jun 23 2023	?	We advise that you check the fuel injection system.		

HISTORICAL DIAGNOSIS


18 Apr 2023 Diag: Wes Davis

FUEL



We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.







Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.



11 Oct 2022 Diag: Wes Davis




Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend

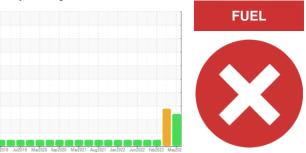

Machine Id

MANITOWOC MLC 300 015-0067

Diesel Engine

SCHAEFFER SUPREME 7000 (12 GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.


Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.


an2019 Jul2019 Maz ² 020 Sep2020 Maz ² 021 Aug2021 Jan ² 022 Jun ² 022 Feb2023 May202								
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		WC0815147	WC0750687	WC0750632		
Sample Date		Client Info		05 May 2023	18 Apr 2023	22 Feb 2023		
Machine Age	hrs	Client Info		7883	7794	7606		
Oil Age	hrs	Client Info		42	0	0		
Oil Changed		Client Info		Not Changd	Changed	Changed		
Sample Status				SEVERE	SEVERE	NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2		
Water		WC Method	>0.2	NEG	NEG	NEG		
Glycol		WC Method		NEG	NEG	NEG		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>90	<1	<1	3		
Chromium	ppm	ASTM D5185m	>20	<1	<1	0		
Nickel	ppm	ASTM D5185m	>2	1	0	<1		
Titanium	ppm	ASTM D5185m	>2	0	0	0		
Silver	ppm	ASTM D5185m	>2	<1	0	0		
Aluminum	ppm	ASTM D5185m	>20	0	2	2		
Lead	ppm	ASTM D5185m	>40	1	0	0		
Copper	ppm	ASTM D5185m	>330	0	0	<1		
Tin	ppm	ASTM D5185m	>15	<1	0	0		
Vanadium	ppm	ASTM D5185m		<1	0	<1		
Cadmium	ppm	ASTM D5185m		0	0	0		
ADDITIVES		method	limit/base	current	history1	history2		
ADDITIVES Boron	ppm	method ASTM D5185m	limit/base	current 78	history1 81	history2		
	ppm		limit/base		•			
Boron		ASTM D5185m	limit/base	78	81	72		
Boron Barium	ppm	ASTM D5185m ASTM D5185m		78 0	81	72 2		
Boron Barium Molybdenum	ppm	ASTM D5185m ASTM D5185m ASTM D5185m		78 0 57	81 0 60	72 2 76		
Boron Barium Molybdenum Manganese	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	50	78 0 57 <1	81 0 60 <1	72 2 76 <1		
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	50	78 0 57 <1 18	81 0 60 <1 20	72 2 76 <1		
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	50 1000 1400	78 0 57 <1 18	81 0 60 <1 20 1744	72 2 76 <1 17 2302		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	50 1000 1400 985	78 0 57 <1 18 1880 916	81 0 60 <1 20 1744 839	72 2 76 <1 17 2302 1020		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	50 1000 1400 985 1060	78 0 57 <1 18 1880 916 1105	81 0 60 <1 20 1744 839 977	72 2 76 <1 17 2302 1020		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	50 1000 1400 985 1060 4000 limit/base	78 0 57 <1 18 1880 916 1105 5371	81 0 60 <1 20 1744 839 977 4951	72 2 76 <1 17 2302 1020 1185 4263		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	50 1000 1400 985 1060 4000 limit/base	78 0 57 <1 18 1880 916 1105 5371 current	81 0 60 <1 20 1744 839 977 4951 history1	72 2 76 <1 17 2302 1020 1185 4263 history2		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	50 1000 1400 985 1060 4000 limit/base	78 0 57 <1 18 1880 916 1105 5371 current	81 0 60 <1 20 1744 839 977 4951 history1	72 2 76 <1 17 2302 1020 1185 4263 history2 <1		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	50 1000 1400 985 1060 4000 limit/base >25 >20	78 0 57 <1 18 1880 916 1105 5371 current 5 <1	81 0 60 <1 20 1744 839 977 4951 history1 3	72 2 76 <1 17 2302 1020 1185 4263 history2 <1 0		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm	ASTM D5185m	50 1000 1400 985 1060 4000 limit/base >25 >20	78 0 57 <1 18 1880 916 1105 5371 current 5 <1	81 0 60 <1 20 1744 839 977 4951 history1 3 2 <1	72 2 76 <1 17 2302 1020 1185 4263 history2 <1 0 2		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel	ppm	ASTM D5185m	50 1000 1400 985 1060 4000 limit/base >25 >20 >5	78 0 57 <1 18 1880 916 1105 5371 current 5 <1 2 ▲ 12.5 current	81 0 60 <1 20 1744 839 977 4951 history1 3 2 <1 ▲ 18.2	72 2 76 <1 17 2302 1020 1185 4263 history2 <1 0 2 <1.0		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED	ppm	ASTM D5185m ASTM D3524	50 1000 1400 985 1060 4000 limit/base >25 >20 >5	78 0 57 <1 18 1880 916 1105 5371	81 0 60 <1 20 1744 839 977 4951 history1 3 2 <1 ▲ 18.2 history1	72 2 76 <1 17 2302 1020 1185 4263 history2 <1 0 2 <1.0 history2		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot %	ppm	ASTM D5185m	50 1000 1400 985 1060 4000 limit/base >25 >20 >5 limit/base	78 0 57 <1 18 1880 916 1105 5371 current 5 <1 2 ▲ 12.5 current 0	81 0 60 <1 20 1744 839 977 4951 history1 3 2 <1 ▲ 18.2 history1	72 2 76 <1 17 2302 1020 1185 4263 history2 <1 0 2 <1.0 history2 0.1		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	ppm	ASTM D5185m ASTM D7844 *ASTM D7844	50 1000 1400 985 1060 4000 limit/base >25 >20 >5 limit/base	78 0 57 <1 18 1880 916 1105 5371 current 5 <1 2 ▲ 12.5 current 0 6.9	81 0 60 <1 20 1744 839 977 4951 history1 3 2 <1 ▲ 18.2 history1 0 6.9	72 2 76 <1 17 2302 1020 1185 4263 history2 <1 0 2 <1.0 history2 0.1 9.1		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation FLUID DEGRADA	ppm	ASTM D5185m ASTM D78124 *ASTM D7844 *ASTM D7844 *ASTM D7844 *ASTM D7844	50 1000 1400 985 1060 4000 limit/base >25 >20 >5 limit/base >6 >20 >30 limit/base	78 0 57 <1 18 1880 916 1105 5371 current 5 <1 2 ▲ 12.5 current 0 6.9 15.8 current	81 0 60 <1 20 1744 839 977 4951 history1 3 2 <1 ▲ 18.2 history1 0 6.9 17.5 history1	72 2 76 <1 17 2302 1020 1185 4263 history2 <1 0 2 <1.0 history2 0.1 9.1 18.8 history2		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation	ppm	ASTM D5185m ASTM D7844 *ASTM D7624 *ASTM D7624	50 1000 1400 985 1060 4000 limit/base >25 >20 >5 limit/base >6 >20 >30	78 0 57 <1 18 1880 916 1105 5371 current 5 <1 2 ▲ 12.5 current 0 6.9 15.8	81 0 60 <1 20 1744 839 977 4951 history1 3 2 <1 ▲ 18.2 history1 0 6.9 17.5	72 2 76 <1 17 2302 1020 1185 4263 history2 <1 0 2 <1.0 history2 0.1 9.1 18.8		





OIL ANALYSIS REPORT










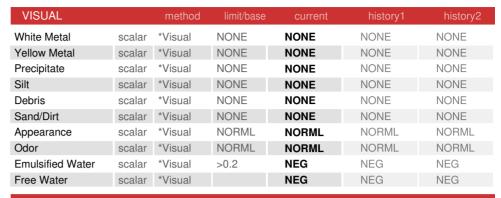



FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15	<u> </u>	9 .3	14.3

GRAPHS

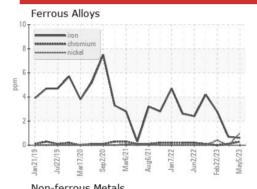

8 - ****	*****	copper lead tin							
6									
4									
2									
0	-6	<u>\</u>		\triangle	<u></u>	22	22	23	S. C.
Jan21/19	Jul22/19	Mar17/20	Sep2/20	Mar6/2	Aug6/21	Jan7/2	Jun2/22	Feb22/23	May5/23



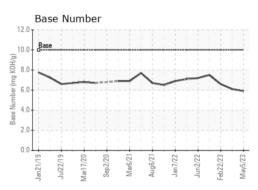





Certificate 12367

Laboratory Sample No.

: WC0815147 Lab Number : 05842578

Unique Number : 10466685

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 09 May 2023

Tested : 11 May 2023

Diagnosed : 11 May 2023 - Wes Davis

Test Package : CONST (Additional Tests: PercentFuel, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

SHIMMICK CONSTRUCTION

5535 TRAILHEAD DRIVE CHATTANOOGA, TN US 37415

Contact: DANIEL LISELLA daniel.lisella@shimmick.com

T:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: AECCHATN [WUSCAR] 05842578 (Generated: 04/18/2024 12:51:18) Rev: 1

Contact/Location: DANIEL LISELLA - AECCHATN

F: