




# OIL ANALYSIS REPORT

Sample Rating Trend

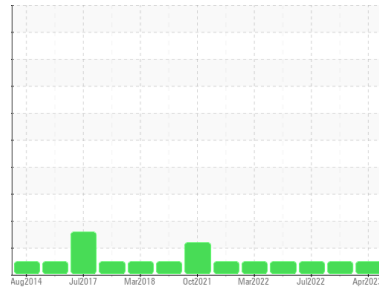

**NORMAL**



Machine Id  
**CATERPILLAR RIB 55-B (S/N 059020)**  
 Component  
**Left Diesel Engine**  
 Fluid  
**MOBIL 15W40 (85 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RP0022143</b>	RP0018671	RP0022140
Sample Date	Client Info		<b>08 Apr 2023</b>	29 Oct 2022	22 Jul 2022
Machine Age	hrs	Client Info	<b>10467</b>	0	8836
Oil Age	hrs	Client Info	<b>798</b>	750	803
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>4</b>	5	5
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >25	<b>0</b>	<1	1
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>1</b>	1	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>22</b>	174	452
Barium	ppm	ASTM D5185m	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>55</b>	20	84
Manganese	ppm	ASTM D5185m	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	<b>820</b>	97	356
Calcium	ppm	ASTM D5185m	<b>1242</b>	2003	1479
Phosphorus	ppm	ASTM D5185m	<b>1067</b>	904	1038
Zinc	ppm	ASTM D5185m	<b>1261</b>	1108	1277

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>2</b>	2	4
Sodium	ppm	ASTM D5185m >118	<b>1</b>	3	2
Potassium	ppm	ASTM D5185m >20	<b>2</b>	5	3




## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.9</b>	8.4	6.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.9</b>	23	21.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.3</b>	18.6	15.6
Base Number (BN)	mg KOH/g	ASTM D2896	<b>9.60</b>	6.17	6.42





# OIL ANALYSIS REPORT

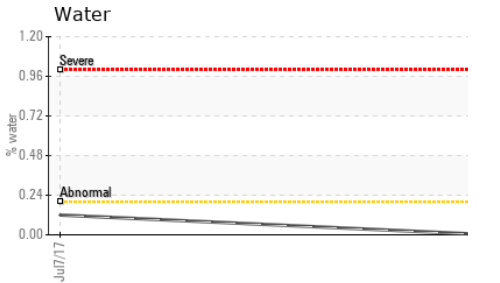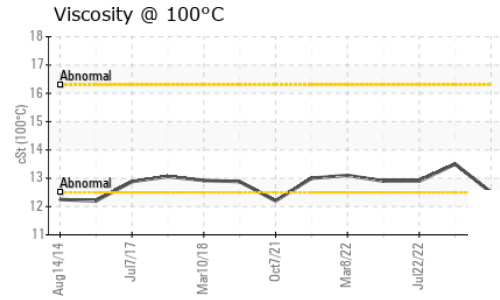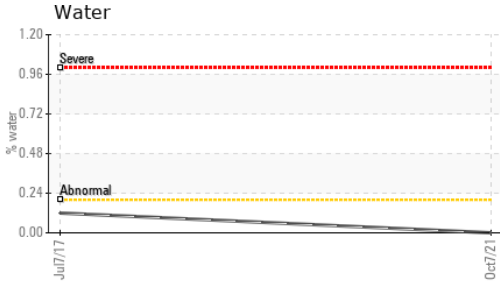

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.5	13.5	12.9

## GRAPHS

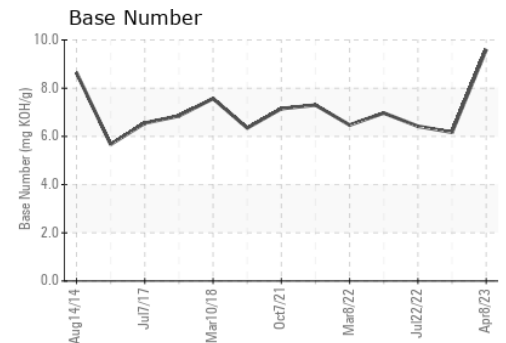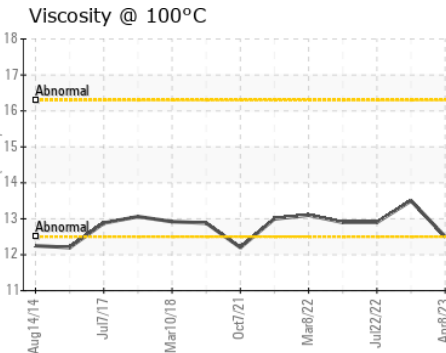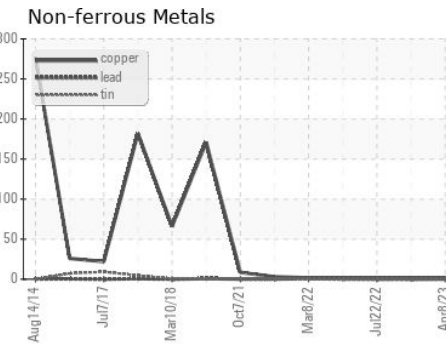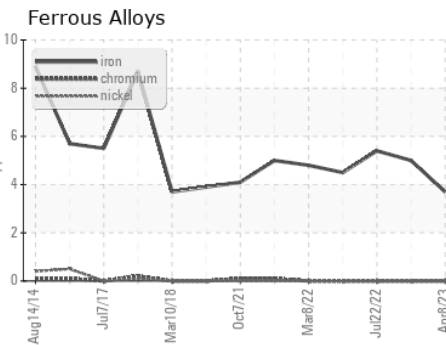

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0022143  
**Lab Number** : 05843509  
**Unique Number** : 10467616  
**Test Package** : IND 2 ( Additional Tests: FT-IR, KV100, TBN )

**PARKER DRILLING COMPANY**  
 1110 UNIFAB RD  
 NEW IBERIA, LA  
 US 70560  
 Contact: BRENT CARLINE  
 brent.carline@parkerdrilling.com  
 T: (337)364-3122  
 F: (337)364-0232

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)