



# PROBLEM SUMMARY

Sample Rating Trend




DIRT




Area  
**MAIN ID FANS**  
 Machine Id  
**0370FN01**  
 Component  
**Outboard Plain Bearing**  
 Fluid  
**SUMMIT TM-30 (5 GAL)**

## COMPONENT CONDITION SUMMARY


### ▲ Non-ferrous Metals

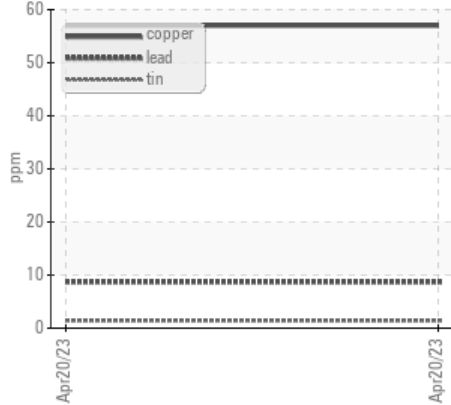

### ▲ Particle Trend

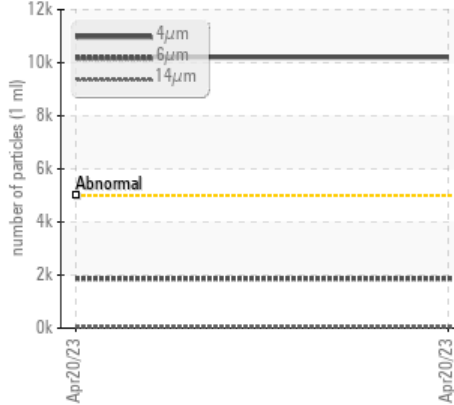

### ▲ Silicon (ppm)

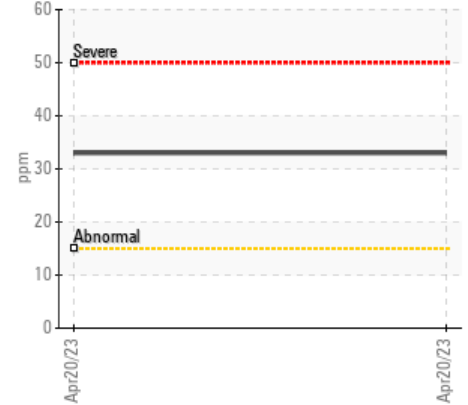

## RECOMMENDATION

No corrective action is recommended at this time.  
 Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	---	---
Copper	ppm	ASTM D5185m	>20	▲ 57	---	---
Silicon	ppm	ASTM D5185m	>15	▲ 33	---	---
Particles >4µm		ASTM D7647	>5000	▲ 10211	---	---
Particles >6µm		ASTM D7647	>1300	▲ 1866	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 21/18/13	---	---

Customer Id: FLAMONNC  
 Sample No.: WC0730513  
 Lab Number: 05844409  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS


*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

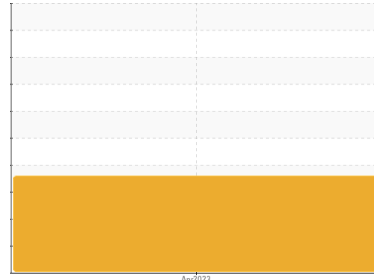

DIRT



Area  
**MAIN ID FANS**  
 Machine Id  
**0370FN01**  
 Component  
**Outboard Plain Bearing**  
 Fluid  
**SUMMIT TM-30 (5 GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

The copper level is abnormal. All other component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0730513</b>	---	---
Sample Date	Client Info	<b>20 Apr 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---
Oil Age	hrs	Client Info	<b>0</b>	---
Oil Changed	Client Info	<b>Not Changed</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >2	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	<b>8</b>	---	---
Chromium	ppm ASTM D5185m >20	<b>0</b>	---	---
Nickel	ppm ASTM D5185m >20	<b>0</b>	---	---
Titanium	ppm ASTM D5185m	<b>0</b>	---	---
Silver	ppm ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm ASTM D5185m >20	<b>0</b>	---	---
Lead	ppm ASTM D5185m >20	<b>9</b>	---	---
Copper	ppm ASTM D5185m >20	<b>▲ 57</b>	---	---
Tin	ppm ASTM D5185m >20	<b>1</b>	---	---
Vanadium	ppm ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>0</b>	---	---
Barium	ppm ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185m	<b>0</b>	---	---
Manganese	ppm ASTM D5185m	<b>0</b>	---	---
Magnesium	ppm ASTM D5185m	<b>0</b>	---	---
Calcium	ppm ASTM D5185m	<b>0</b>	---	---
Phosphorus	ppm ASTM D5185m	<b>177</b>	---	---
Zinc	ppm ASTM D5185m	<b>14</b>	---	---
Sulfur	ppm ASTM D5185m	<b>1494</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<b>▲ 33</b>	---	---
Sodium	ppm ASTM D5185m	<b>0</b>	---	---
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	---	---

## FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>▲ 10211</b>	---	---
Particles >6µm	ASTM D7647 >1300	<b>▲ 1866</b>	---	---
Particles >14µm	ASTM D7647 >160	<b>50</b>	---	---
Particles >21µm	ASTM D7647 >40	<b>9</b>	---	---
Particles >38µm	ASTM D7647 >10	<b>0</b>	---	---
Particles >71µm	ASTM D7647 >3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>▲ 21/18/13</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	<b>0.134</b>	---	---



# OIL ANALYSIS REPORT

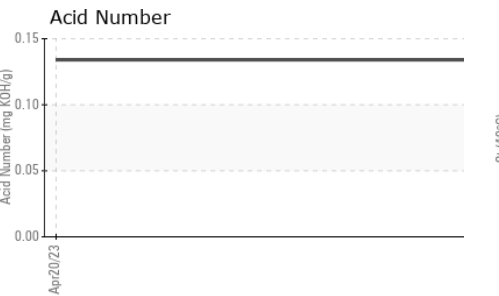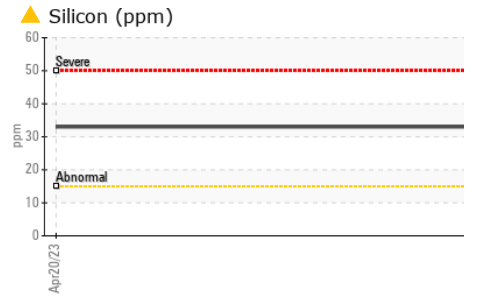
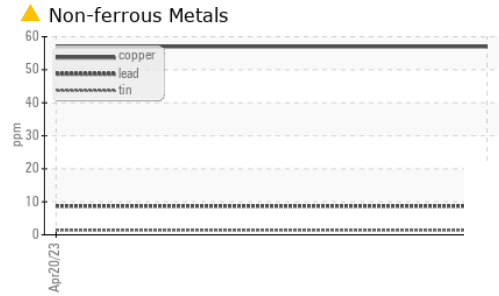
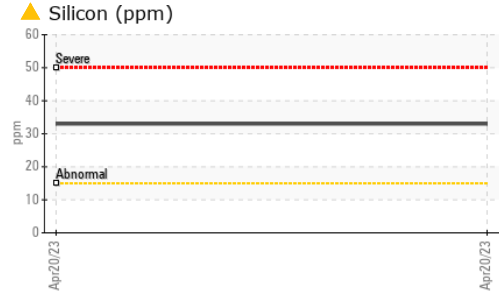
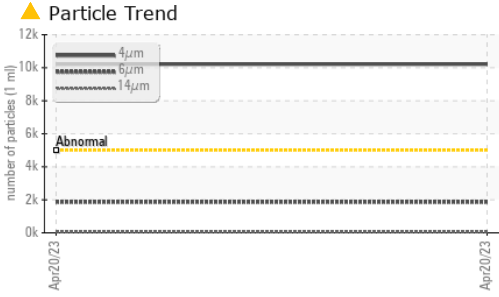


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	97.3	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

### GRAPHS

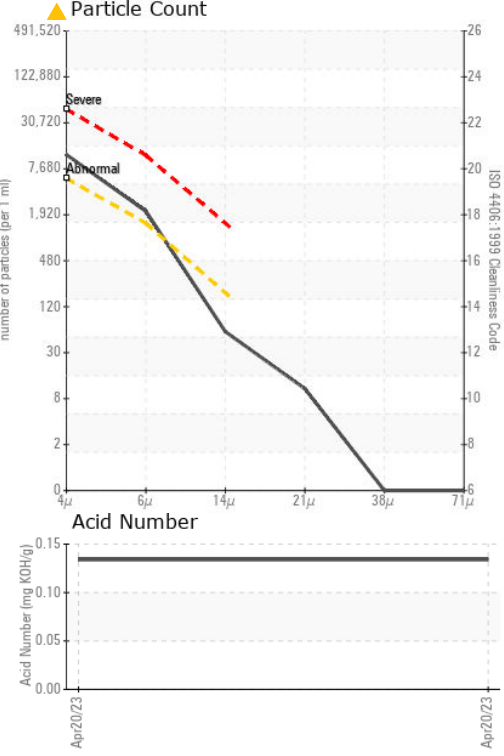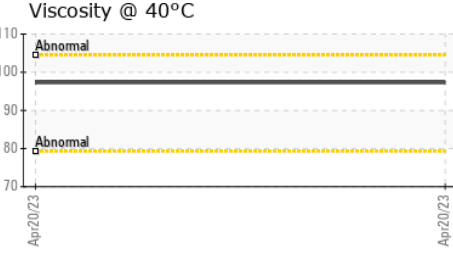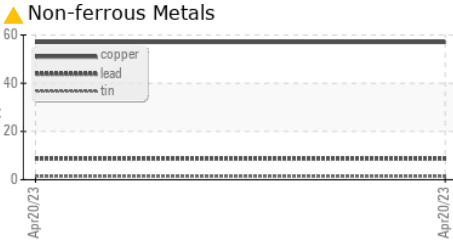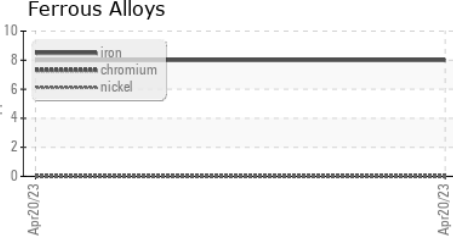

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0730513 **Received** : 11 May 2023  
**Lab Number** : 05844409 **Diagnosed** : 14 May 2023  
**Unique Number** : 10468516 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: PrtCount )

**ARAUCO FLAKEBOARD - MDF**  
 985 CORINTH RD  
 MONCURE, NC  
 US  
 Contact: CHRISTOPHER JACKSON  
 christopher.jackson@arauco.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)