




PROBLEM SUMMARY

Sample Rating Trend

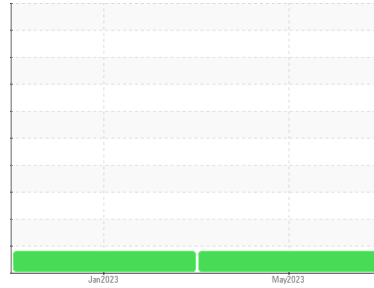


ISO



Machine Id
KOBELCO SK210C SK210C
 Component
Hydraulic System
 Fluid
NOT GIVEN (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

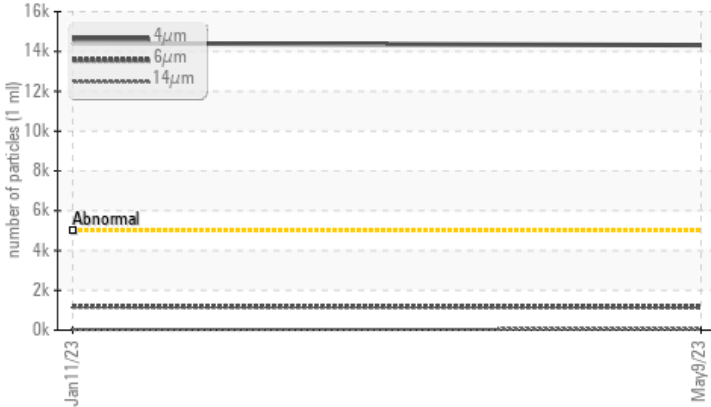

RECOMMENDATION

The filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	ABNORMAL	---
Particles >4µm	ASTM D7647 >5000	▲ 14318	▲ 14414	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 21/17/13	▲ 21/17/12	---

Customer Id: AMEMID
 Sample No.: CL0004266
 Lab Number: 05846249
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Information Required	---	---	?	Please specify the brand, type, and viscosity of the oil on your next sample.

HISTORICAL DIAGNOSIS

11 Jan 2023 Diag: Don Baldrige

ISO



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

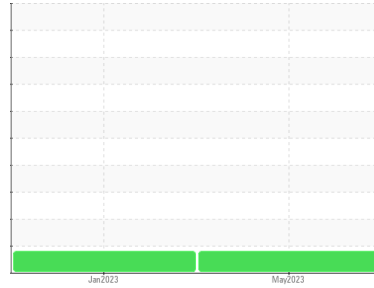

ISO



Machine Id
KOBELCO SK210C SK210C

Component
Hydraulic System

Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		CL0004266	CL0003899	---
Sample Date	Client Info		09 May 2023	11 Jan 2023	---
Machine Age	hrs	Client Info	1016	503	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		Not Changed	Not Changed	---
Sample Status			ABNORMAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	5	4	---
Chromium	ppm	ASTM D5185m >10	<1	0	---
Nickel	ppm	ASTM D5185m >10	<1	0	---
Titanium	ppm	ASTM D5185m	0	0	---
Silver	ppm	ASTM D5185m	0	0	---
Aluminum	ppm	ASTM D5185m >10	1	0	---
Lead	ppm	ASTM D5185m >10	0	0	---
Copper	ppm	ASTM D5185m >75	3	4	---
Tin	ppm	ASTM D5185m >10	0	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	1	<1	---
Manganese	ppm	ASTM D5185m	<1	<1	---
Magnesium	ppm	ASTM D5185m	17	20	---
Calcium	ppm	ASTM D5185m	49	50	---
Phosphorus	ppm	ASTM D5185m	266	280	---
Zinc	ppm	ASTM D5185m	314	295	---
Sulfur	ppm	ASTM D5185m	8280	6176	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<1	<1	---
Sodium	ppm	ASTM D5185m	<1	<1	---
Potassium	ppm	ASTM D5185m >20	<1	0	---

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 14318	▲ 14414	---
Particles >6µm	ASTM D7647	>1300	1156	1183	---
Particles >14µm	ASTM D7647	>160	41	32	---
Particles >21µm	ASTM D7647	>40	9	6	---
Particles >38µm	ASTM D7647	>10	1	0	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/17/13	▲ 21/17/12	---


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.34	0.45	---




OIL ANALYSIS REPORT


Particle Trend

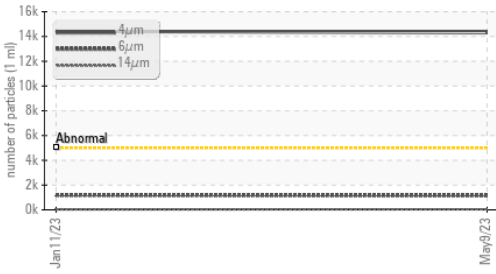


Particle Trend

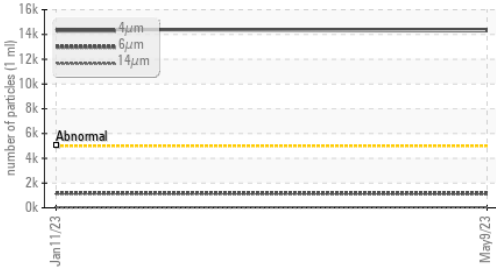

Acid Number

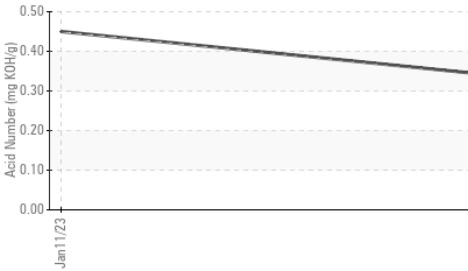

Viscosity @ 40°C

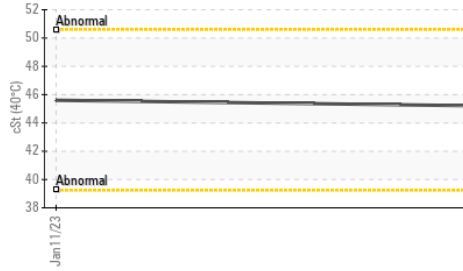





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45.2	45.6	---

SAMPLE IMAGES


SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					





GRAPHS

Ferrous Alloys

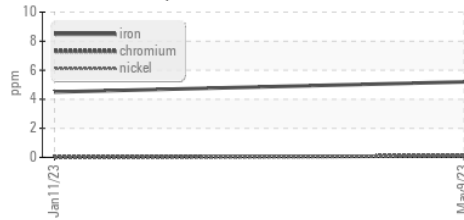


Non-ferrous Metals

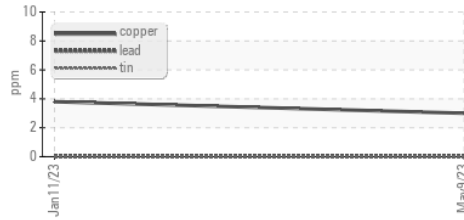

Viscosity @ 40°C



Particle Count

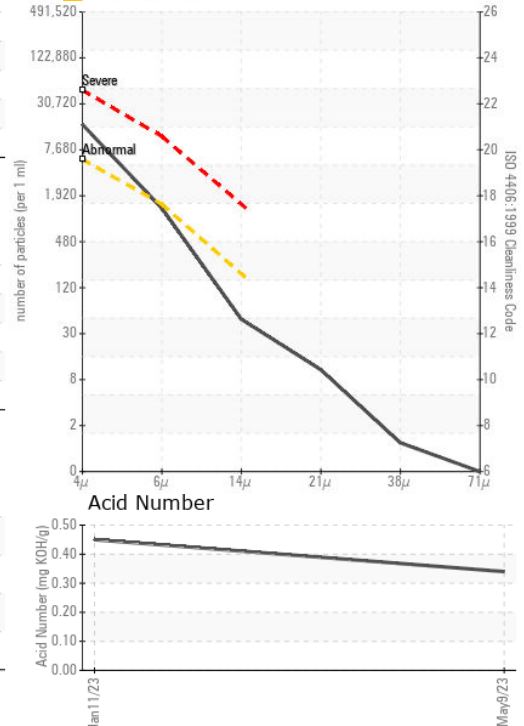

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : CL0004266 Received : 12 May 2023
 Lab Number : 05846249 Diagnosed : 15 May 2023
 Unique Number : 10470356 Diagnostician : Wes Davis
 Test Package : CONST

AMERICAN SITE AND UTILITY
 10902 CANDILARA LN
 MIDLAND, NC
 US 28107
 Contact: TIM PRESTON
 spreton.asu@gmail.com
 T: (704)787-1557
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)