




OIL ANALYSIS REPORT

Sample Rating Trend

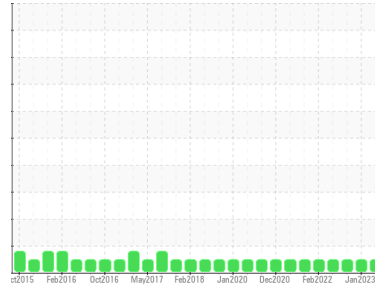

NORMAL

Machine Id
OSHKOSH MIXER 235
 Component
Diesel Engine
 Fluid
DIESSEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0802330	WC0661749	WC0721490
Sample Date	Client Info		03 May 2023	04 Jan 2023	30 Aug 2022
Machine Age	hrs	Client Info	26184	26184	26184
Oil Age	hrs	Client Info	500	500	500
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	18	17	15
Chromium	ppm	ASTM D5185m >4	1	1	<1
Nickel	ppm	ASTM D5185m >4	<1	<1	0
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >9	1	<1	0
Lead	ppm	ASTM D5185m >20	0	1	<1
Copper	ppm	ASTM D5185m >260	1	2	2
Tin	ppm	ASTM D5185m >4	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	11	8	9
Barium	ppm	ASTM D5185m 10	0	2	0
Molybdenum	ppm	ASTM D5185m 100	68	53	61
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 450	929	839	870
Calcium	ppm	ASTM D5185m 3000	1259	966	1104
Phosphorus	ppm	ASTM D5185m 1150	1113	878	971
Zinc	ppm	ASTM D5185m 1350	1447	1115	1166
Sulfur	ppm	ASTM D5185m 4250	4453	3190	3398

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	3	2	2
Sodium	ppm	ASTM D5185m >158	1	2	0
Potassium	ppm	ASTM D5185m >20	<1	<1	1

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	0.3	0.4
Nitration	Abs/cm	*ASTM D7624 >20	8.1	7.9	8.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.7	19.3	21.0

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.8	15.3	16.2
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	10.30	9.25	8.55











OIL ANALYSIS REPORT

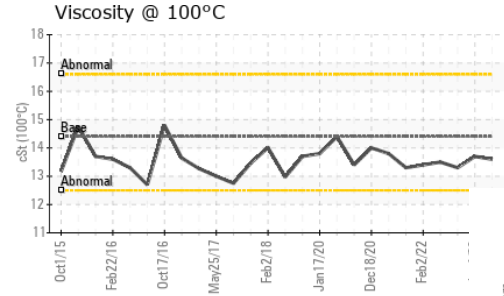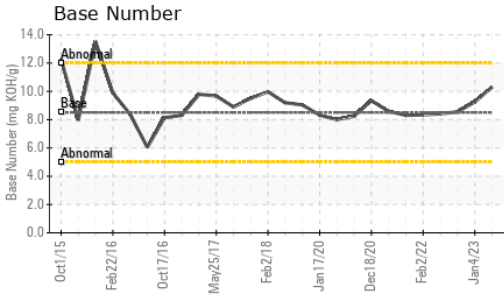

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.6	13.7	13.3

GRAPHS

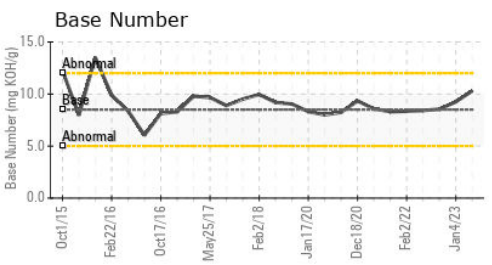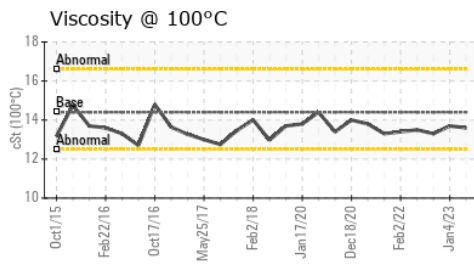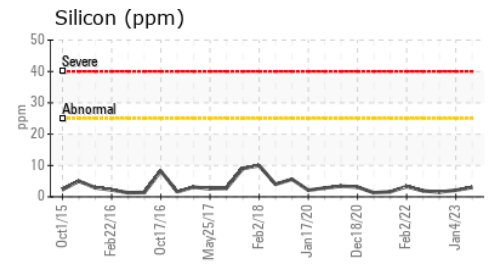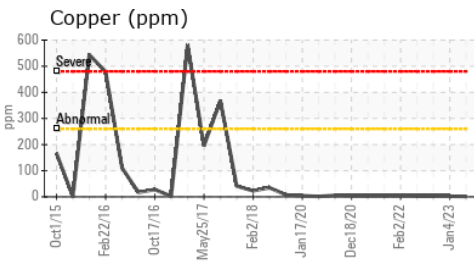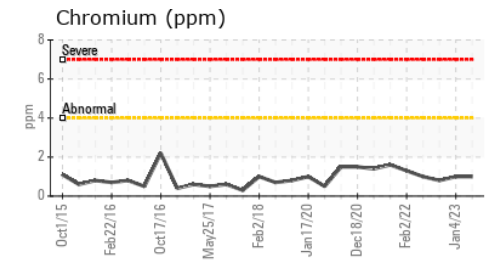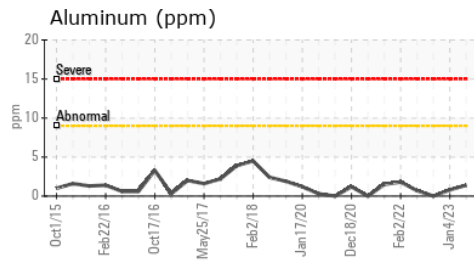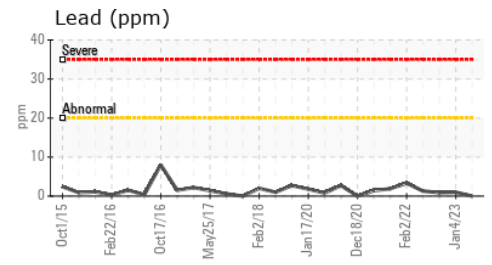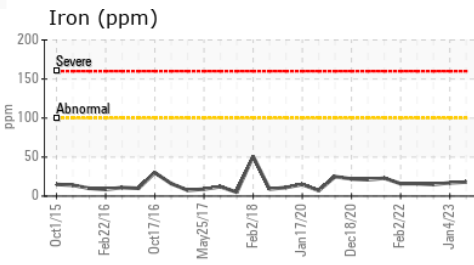

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0802330 **Received** : 12 May 2023
Lab Number : 05846419 **Diagnosed** : 15 May 2023
Unique Number : 10470526 **Diagnostician** : Wes Davis
Test Package : MOB 2

TRESCA BROS SAND & GRAVEL INC
 66 MAIN ST
 MILLIS, MA
 US 02054
 Contact: FRAN ROSSI
 frossi@trescaconcrete.com
 T: (508)376-2957
 F: (508)376-4333

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)