




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

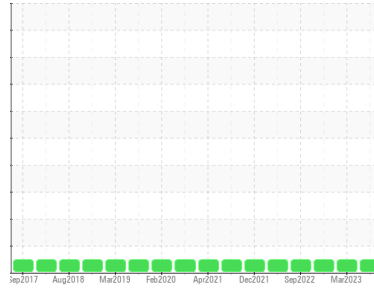

Area
[W-1386810]
 Machine Id
KEN F-150

Component
Gasoline Engine
 Fluid
KENDALL GT-1 HIGH PERFORMANCE SYNTH 5W20 (8 QTS)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor. (Customer Sample Comment: Engine Hours: 2267)

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0680175	WC0680174	WC0606620
Sample Date	Client Info			11 May 2023	02 Mar 2023	10 Nov 2022
Machine Age	mls Client Info			85865	79765	76382
Oil Age	mls Client Info			6100	3384	6107
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	7	4	6
Chromium	ppm	ASTM D5185m	>20	0	0	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>40	<1	1	1
Lead	ppm	ASTM D5185m	>50	0	<1	<1
Copper	ppm	ASTM D5185m	>155	2	<1	1
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		22	47	25
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		96	116	102
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		410	426	433
Calcium	ppm	ASTM D5185m		1284	1276	1182
Phosphorus	ppm	ASTM D5185m	770	628	624	620
Zinc	ppm	ASTM D5185m	850	778	811	719
Sulfur	ppm	ASTM D5185m		2111	2110	2366




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	6	6	6
Sodium	ppm	ASTM D5185m	>400	2	<1	0
Potassium	ppm	ASTM D5185m	>20	2	2	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.3	8.2	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.0	18.1	22.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.7	10.4	13.3
Acid Number (AN)	mg KOH/g	ASTM D8045		1.568	1.29	1.12








OIL ANALYSIS REPORT

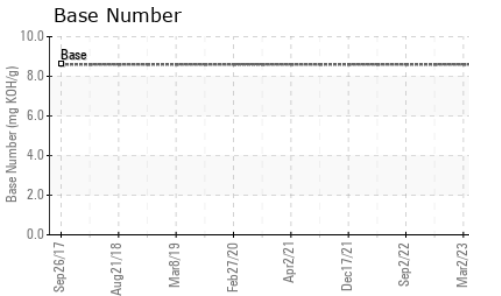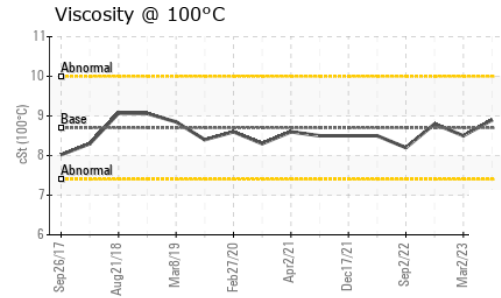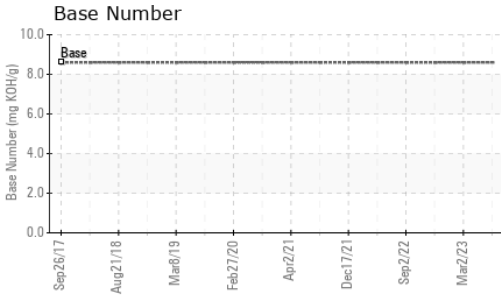

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	8.7	8.9	8.5	8.8

GRAPHS

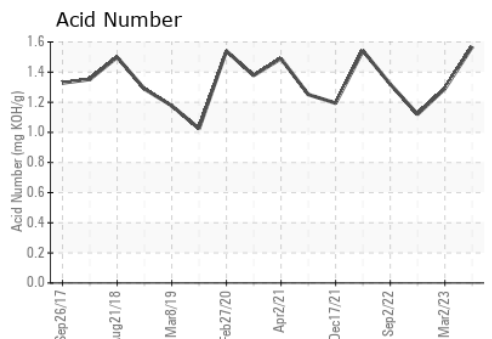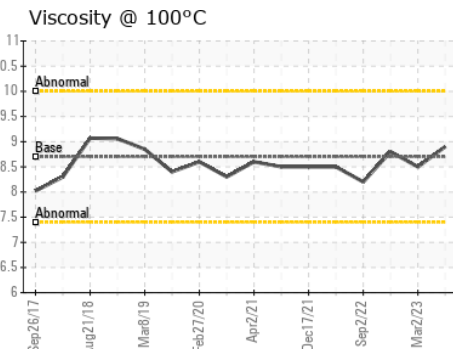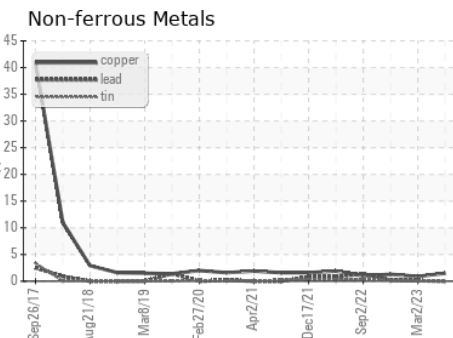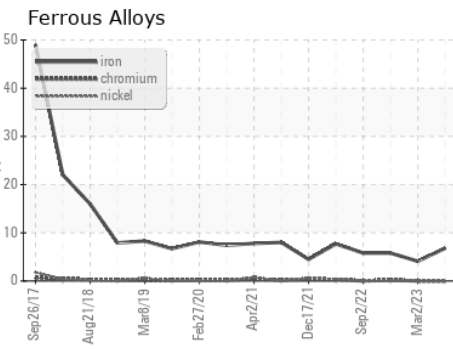

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0680175 **Received** : 16 May 2023
Lab Number : **05848441** **Diagnosed** : 23 May 2023
Unique Number : 10472548 **Diagnostician** : Jonathan Hester
Test Package : FLEET

WEARCHECK USA
 501 Madison Ave
 Cary, NC
 US 27513
 Contact: CATHERINE ANASTASIO
 CANASTASIO@WEARCHECKUSA.COM
 T:
 F: (919)379-4050

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)