


## **PROBLEM SUMMARY**

# KAESER SK 20 8184729 (S/N 1709)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

## COMPONENT CONDITION SUMMARY

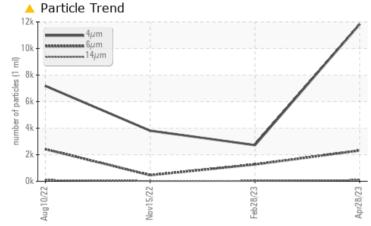

## RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS								
Sample Status		ATTENTION	NORMAL	NORMAL				
Particles >6µm	ASTM D7647 >1300	<u> </u>	1265	457				
Particles >14µm	ASTM D7647 >80	<u> </u>	30	20				
Particles >21µm	ASTM D7647 >20	<u> </u>	7	6				
Oil Cleanliness	ISO 4406 (c) >/17/13	<b>A</b> 21/18/14	19/17/12	19/16/11				


Customer Id: CUEORL Sample No.: KC106330 Lab Number: 05849775 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

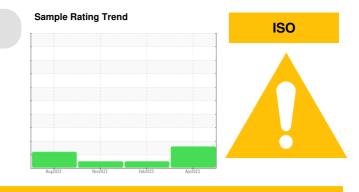

#### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

#### **HISTORICAL DIAGNOSIS**

## 28 Feb 2023 Diag: Don Baldridge



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## 15 Nov 2022 Diag: Jonathan Hester



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report



10 Aug 2022 Diag: Don Baldridge

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





## **OIL ANALYSIS REPORT**

## KAESER SK 20 8184729 (S/N 1709)

Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

## DIAGNOSIS

## A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear


All component wear rates are normal.

## Contamination

There is a moderate amount of particulates present in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC106330	KC112365	KC101552
Sample Date		Client Info		28 Apr 2023	28 Feb 2023	15 Nov 2022
Machine Age	hrs	Client Info		5170	4472	3207
Oil Age	hrs	Client Info		698	2000	1265
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				ATTENTION	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	0
Chromium	ppm	ASTM D5185m		0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m		0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper		ASTM D5185m		2	12	9
Tin	ppm	ASTM D5185m	>50	2	0	0
Vanadium	ppm	ASTM D5185m	×10	0	0	0
Cadmium	ppm	ASTM D5185m ASTM D5185m		0	0	0
	ppm			U	-	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	90	52	11	19
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		2	0	0
Zinc	ppm	ASTM D5185m		0	6	23
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	0
Sodium	ppm	ASTM D5185m		12	<1	0
Potassium	ppm	ASTM D5185m	>20	3	<1	0
Water	%	ASTM D6304	>0.05	0.041	0.008	0.049
ppm Water	ppm	ASTM D6304	>500	412.2	84.9	492.2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		11832	2721	3807
Particles >6µm		ASTM D7647	>1300	<u> </u>	1265	457
Particles >14µm		ASTM D7647	>80	<u> </u>	30	20
Particles >21µm		ASTM D7647	>20	<u> </u>	7	6
Particles >38µm		ASTM D7647	>4	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 21/18/14	19/17/12	19/16/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.37	0.31	0.31
	ing itoriy	101W D0040	0.7	0.07	0.01	0.01



Built for a lifetime

## **OIL ANALYSIS REPORT**

scalar

scalar

scalar

scalar

method

\*Visual

\*Visual

\*Visua

\*Visual

scalar \*Visual

limit/base


NONE


NONE

NONE

NONE

NONE

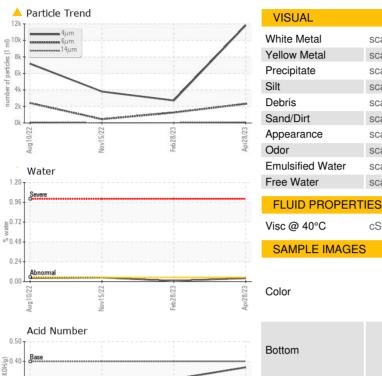

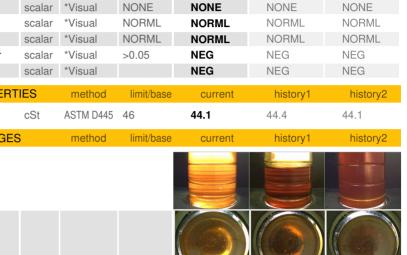

current

NONE

NONE

NONE

NONE

LIGHT

history1

NONE

NONE

NONE

NONE

NONE

history2


NONE

NONE

NONE

NONE

NONE

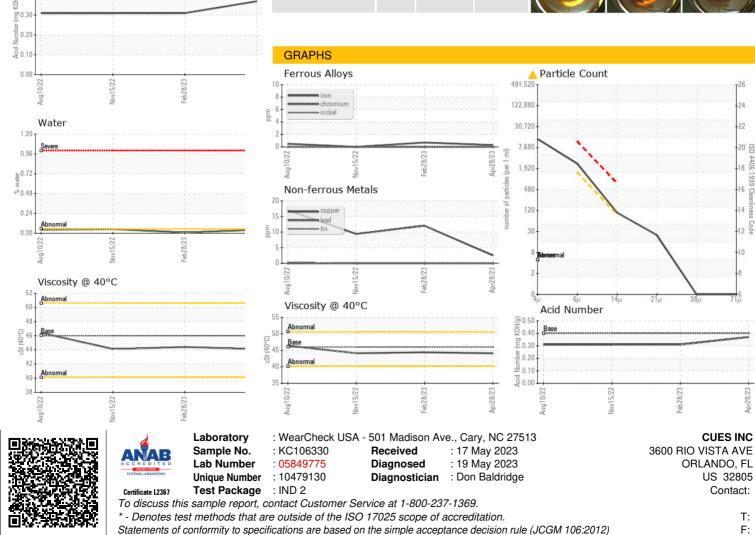

Page 4 of 4