




# OIL ANALYSIS REPORT

Sample Rating Trend

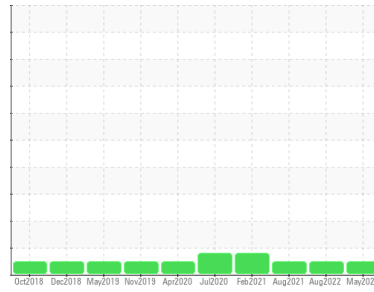

**NORMAL**



Machine Id  
**PIERCE 0077**  
 Component  
**Diesel Engine**  
 Fluid  
**SYNGARD 15W40 (33 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0804020</b>	WC0708762	WC0610935
Sample Date	Client Info		<b>11 May 2023</b>	23 Aug 2022	05 Aug 2021
Machine Age	hrs	Client Info	<b>7288</b>	6544	5678
Oil Age	hrs	Client Info	<b>288</b>	654	377
Oil Changed	Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>65	<b>8</b>	21	12
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	2	11
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>35	<b>4</b>	12	5
Lead	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>180	<b>3</b>	10	13
Tin	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m	>35	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>30</b>	21	85
Barium	ppm	ASTM D5185m		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>76</b>	62	49
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>424</b>	297	667
Calcium	ppm	ASTM D5185m		<b>1792</b>	1770	1400
Phosphorus	ppm	ASTM D5185m		<b>1047</b>	900	719
Zinc	ppm	ASTM D5185m		<b>1277</b>	1170	829
Sulfur	ppm	ASTM D5185m		<b>4376</b>	3121	2510

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	<b>5</b>	4	4
Sodium	ppm	ASTM D5185m		<b>2</b>	12	9
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	6	10

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	1	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.2</b>	11.2	9.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.7</b>	25.6	21.3


## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.3</b>	19.1	15.8
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.6</b>	6.4	---




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

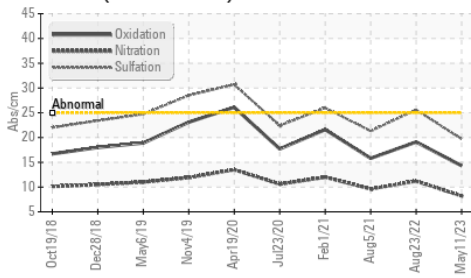

Base Number

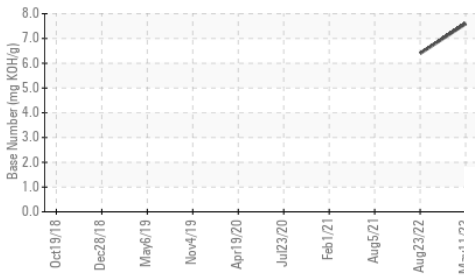

Viscosity @ 100°C

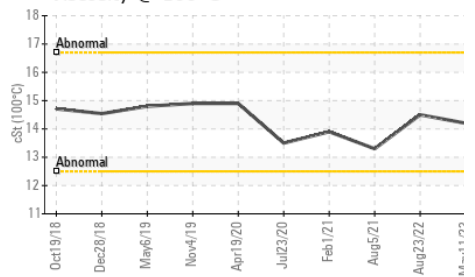


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.2	14.5	13.3

## GRAPHS


Ferrous Alloys

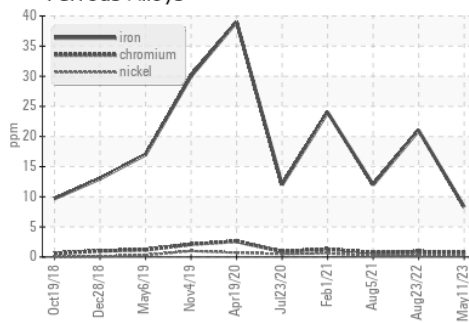


Non-ferrous Metals

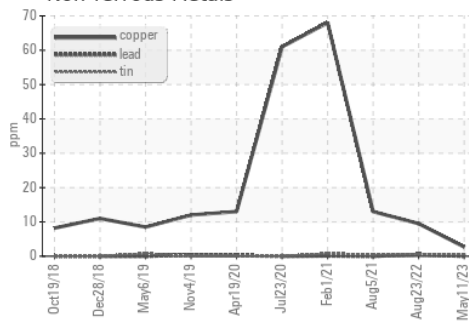

Viscosity @ 100°C

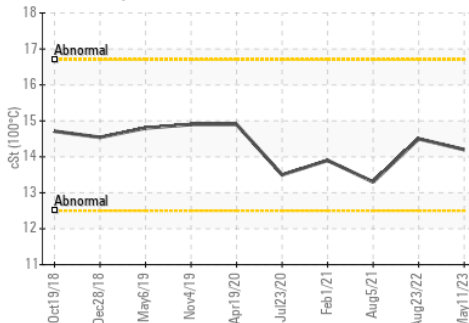

Base Number

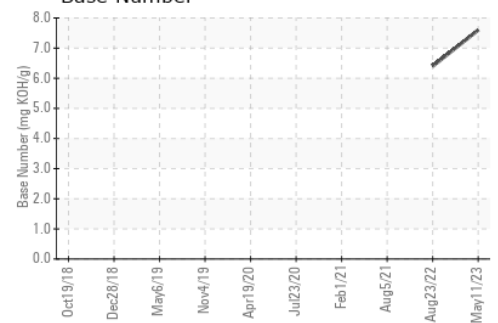

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0804020 Received : 18 May 2023  
 Lab Number : 05850436 Tested : 19 May 2023  
 Unique Number : 10479791 Diagnosed : 19 May 2023 - Wes Davis  
 Test Package : CONST ( Additional Tests: TBN )

**TOWN OF CARY**  
 420 JAMES JACKSON AVENUE  
 CARY, NC  
 US 27513  
 Contact: BRANDON PASINSKI  
 brandon.pasinski@townofcary.org  
 T: (919)469-4098  
 F: (919)380-6420

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)