


## **PROBLEM SUMMARY**

Machine Id RECYCLED NH3 Component

Refrigeration Compressor Fluid USPI ALT-68 SC (--- GAL)

## COMPONENT CONDITION SUMMARY

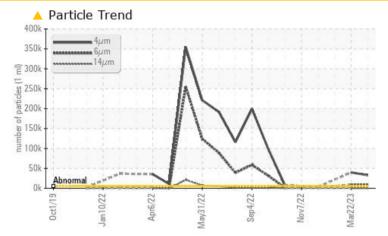

## RECOMMENDATION

This is a baseline read-out on the submitted sample. 5TH BATCH RECLAIMED.

PROBLEMATIC TEST RESULTS							
Sample Status			ABNORMAL	ABNORMAL	NORMAL		
Particles >4µm	ASTM D7647	>5000	<u> </u>	▲ 39862			
Particles >6µm	ASTM D7647	>1300	<u> </u>	<u> </u>			
Particles >14µm	ASTM D7647	>320	<b>A</b> 349	140			
Oil Cleanliness	ISO 4406 (c)	>19/17/15	<b>A</b> 22/20/16	🔺 22/20/14			


Customer Id: KRANEWUSP Sample No.: USP249243 Lab Number: 05850588 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

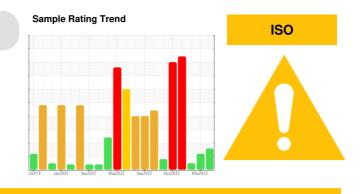

## **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

## **HISTORICAL DIAGNOSIS**

## 22 Mar 2023 Diag: Doug Bogart



This is a baseline read-out on the submitted sample. 5TH BATCH RECLAIMED OIL POST FILTRATION There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

## 15 Dec 2022 Diag: Doug Bogart



This is a baseline read-out on the submitted sample. No ester detected.

05 Dec 2022 Diag: Doug Bogart

## WEAR



This is a baseline read-out on the submitted sample. The iron level is severe. The aluminum level is marginal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. Appearance is hazy. The AN level is acceptable for this fluid.







## **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

# RECYCLED NH3

Refrigeration Compressor Fluid USPI ALT-68 SC (--- GAL)

## DIAGNOSIS

## A Recommendation

This is a baseline read-out on the submitted sample. 5TH BATCH RECLAIMED.

## Contamination

There is a high amount of particulates present in the oil.


## Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		USP249243	USP244074	USP247587
Sample Date		Client Info		15 May 2023	22 Mar 2023	15 Dec 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m		0	0	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>10	2	<1	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>50	<1	0	
Tin	ppm	ASTM D5185m	>10	<1	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m		0	0	
Calcium	ppm	ASTM D5185m		0	0	
Phosphorus	ppm	ASTM D5185m		0	<1	
Zinc	ppm	ASTM D5185m		5	0	
Sulfur	ppm	ASTM D5185m	50	0	0	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1	2	
Sodium	ppm	ASTM D5185m		<1	0	
Potassium	ppm	ASTM D5185m	>20	0	<1	
Water	%	ASTM D6304	>0.01	0.004	0.004	
ppm Water	ppm	ASTM D6304	>100	40.3	43.3	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>A</b> 32750	▲ 39862	
Particles >6µm		ASTM D7647	>1300	<u> </u>	<b>A</b> 8239	
Particles >14µm		ASTM D7647	>320	<b>A</b> 349	140	
Particles >21µm		ASTM D7647	>80	26	8	
Particles >38µm		ASTM D7647	>20	0	0	
Particles >71µm		ASTM D7647	>4	0	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/15	<b>A</b> 22/20/16	▲ 22/20/14	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.015	




# **OIL ANALYSIS REPORT**

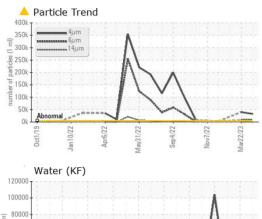




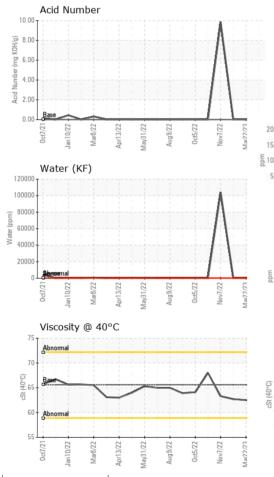

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	65.6	62.1	62.5	
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color				BID MONT	IS 20283 IS20283 INSOU	5-41 Batty



Bottom

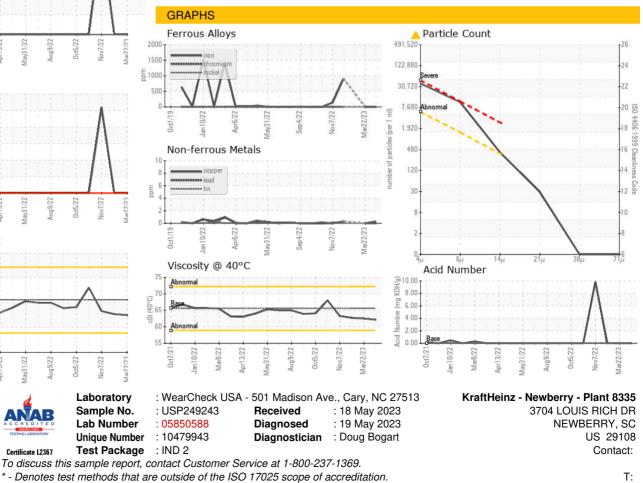

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: ? ? - KRANEWUSP

F: