PROBLEM SUMMARY

Sample Rating Trend

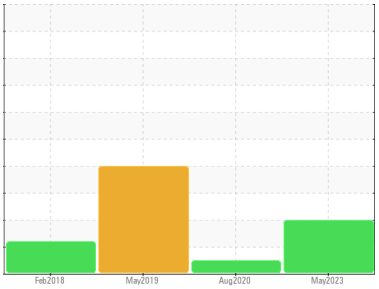

WATER

Machine Id
KAESER SX 5 4456603 (S/N 1088)
Component
Compressor
Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

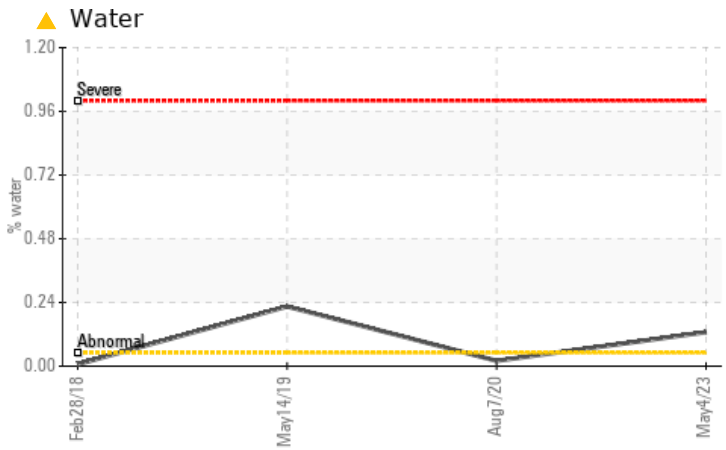

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We recommend an early resample in 500 hours to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				**ABNORMAL**	NORMAL	ABNORMAL
Water	%	ASTM D6304	>0.05	▲ **0.128**	0.020	▲ 0.225
ppm Water	ppm	ASTM D6304	>500	▲ **1280**	206.6	▲ 2250
Debris	scalar	*Visual	NONE	▲ **MODER**	NONE	LIGHT
Emulsified Water	scalar	*Visual	>0.05	▲ **0.2%**	NEG	▲ 0.2%

Customer Id: OLDLAS
Sample No.: KCP52319
Lab Number: 05850652
Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldridge +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Alert	---	---	?	We were unable to perform a particle count due to a high concentration of particles present in this sample.

HISTORICAL DIAGNOSIS

07 Aug 2020 Diag: Don Baldridge

NORMAL

Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report

14 May 2019 Diag: Don Baldridge

WATER

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition.All component wear rates are normal. There is a high amount of particulates present in the oil. There is a light concentration of water present in the oil. The AN level is acceptable for this fluid.

view report

28 Feb 2018 Diag: Angela Borella

ISO

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report

KAESER COMPRESSORS
Built for a lifetime.

OIL ANALYSIS REPORT

Sample Rating Trend

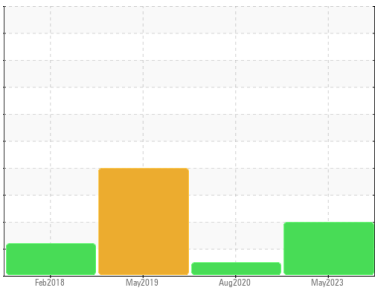

WATER

Machine Id
KAESER SX 5 4456603 (S/N 1088)
Component
Compressor
Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation
Oil and filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We recommend an early resample in 500 hours to monitor this condition.

Wear
All component wear rates are normal.

Contamination
Moderate concentration of visible dirt/debris present in the oil. There is a light concentration of water present in the oil.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**KCP52319**	KCP10575	KCP13602
Sample Date		Client Info		**04 May 2023**	07 Aug 2020	14 May 2019
Machine Age	hrs	Client Info		**8253**	3114	2690
Oil Age	hrs	Client Info		**3000**	0	640
Oil Changed		Client Info		**Changed**	Changed	Changed
Sample Status				**ABNORMAL**	NORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	**<1**	2	<1
Chromium	ppm	ASTM D5185m	>10	**0**	0	0
Nickel	ppm	ASTM D5185m	>3	**0**	0	0
Titanium	ppm	ASTM D5185m	>3	**0**	0	0
Silver	ppm	ASTM D5185m	>2	**0**	0	0
Aluminum	ppm	ASTM D5185m	>10	**2**	0	<1
Lead	ppm	ASTM D5185m	>10	**0**	0	<1
Copper	ppm	ASTM D5185m	>50	**2**	1	2
Tin	ppm	ASTM D5185m	>10	**0**	<1	<1
Antimony	ppm	ASTM D5185m		**---**	0	0
Vanadium	ppm	ASTM D5185m		**0**	0	0
Cadmium	ppm	ASTM D5185m		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	**0**	13	<1
Barium	ppm	ASTM D5185m	90	**0**	0	3
Molybdenum	ppm	ASTM D5185m	0	**0**	0	0
Manganese	ppm	ASTM D5185m		**0**	<1	<1
Magnesium	ppm	ASTM D5185m	100	**0**	10	43
Calcium	ppm	ASTM D5185m	0	**0**	<1	0
Phosphorus	ppm	ASTM D5185m	0	**0**	2	2
Zinc	ppm	ASTM D5185m	0	**0**	29	22
Sulfur	ppm	ASTM D5185m	23500	**22734**	16336	21156

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	**0**	<1	<1
Sodium	ppm	ASTM D5185m		**6**	13	12
Potassium	ppm	ASTM D5185m	>20	**1**	2	2
Water	%	ASTM D6304	>0.05	▲ **0.128**	0.020	▲ 0.225
ppm Water	ppm	ASTM D6304	>500	▲ **1280**	206.6	▲ 2250

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		**---**	4780	2974
Particles >6µm		ASTM D7647	>1300	**---**	973	▲ 1620
Particles >14µm		ASTM D7647	>80	**---**	26	▲ 276
Particles >21µm		ASTM D7647	>20	**---**	6	▲ 93
Particles >38µm		ASTM D7647	>4	**---**	2	▲ 14
Particles >71µm		ASTM D7647	>3	**---**	0	1
Oil Cleanliness		ISO 4406 (c)	>--/17/13	**---**	17/12	▲ 18/15

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	**0.39**	0.291	0.388

OIL ANALYSIS REPORT

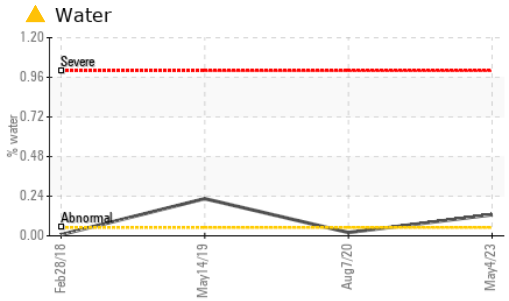

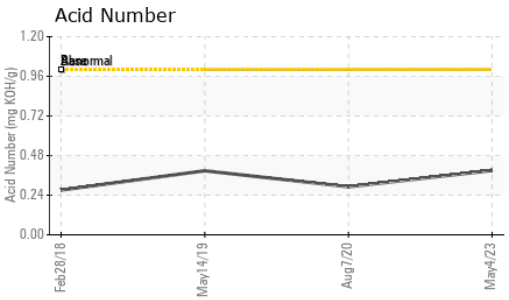

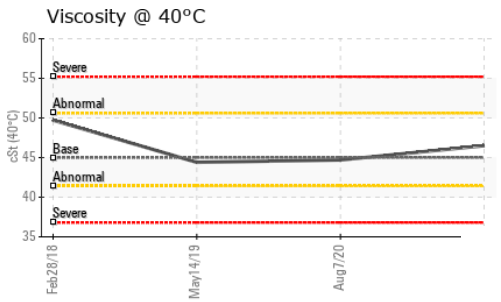

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	▲ **MODER**	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	▲ HAZY
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	▲ **0.2%**	NEG	▲ 0.2%
Free Water	scalar	*Visual		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	**46.5**	44.7	44.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

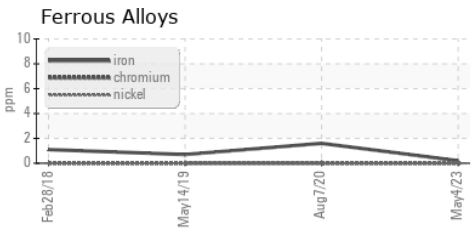

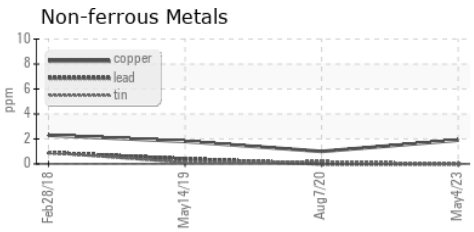

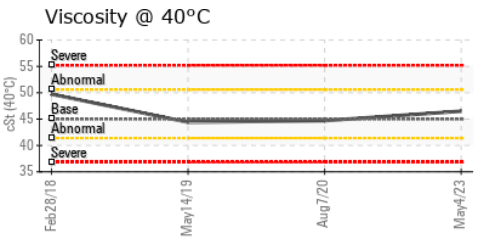

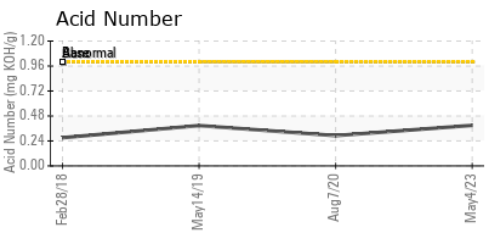

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCP52319 **Received** : 18 May 2023
Lab Number : 05850652 **Diagnosed** : 22 May 2023
Unique Number : 10480007 **Diagnostician** : Don Baldridge
Test Package : IND 2 (Additional Tests: KF, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

OLD DOMINION
4550 E CHEYENNE AVE
LAS VEGAS, NV
US 89115
Contact: Service Manager
T:
F: