

OIL ANALYSIS REPORT

Sample Rating Trend





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|------------------|---------------|-------------|------------|-------------|-----------------|-------------|
| Sample Number | | Client Info | | TLC0001158 | | |
| Sample Date | | Client Info | | 25 May 2023 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| PQ | | ASTM D8184 | | 10 | | |
| Iron | ppm | ASTM D5185m | >20 | 2 | | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | | |
| Nickel | ppm | ASTM D5185m | >10 | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >10 | 0 | | |
| Lead | ppm | ASTM D5185m | >10 | 4 | | |
| Copper | ppm | ASTM D5185m | >75 | 7 | | |
| Tin | ppm | ASTM D5185m | >10 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 3 | | |
| Molybdenum | ppm | ASTM D5185m | | <1 | | |
| Manganese | ppm | ASTM D5185m | | 0 | | |
| Magnesium | ppm | ASTM D5185m | | 1 | | |
| Calcium | ppm | ASTM D5185m | | 9 | | |
| Phosphorus | ppm | ASTM D5185m | | 15 | | |
| Zinc | ppm | ASTM D5185m | | 12 | | |
| Sulfur | ppm | ASTM D5185m | | 4918 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >20 | 15 | | |
| Sodium | ppm | ASTM D5185m | | 0 | | |
| Potassium | ppm | ASTM D5185m | >20 | <1 | | |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.492 | | |
| VISUAL | | method | limit/base | current | history1 | history2 |
| White Metal | scalar | *Visual | NONE | NONE | | |
| Yellow Metal | scalar | *Visual | NONE | NONE | | |
| Precipitate | scalar | *Visual | NONE | NONE | | |
| Silt | scalar | *Visual | NONE | NONE | | |
| Debris | scalar | *Visual | NONE | NONE | | |
| Sand/Dirt | scalar | *Visual | NONE | NONE | | |
| Appearance | scalar | *Visual | NORML | NORML | | |
| Odor | scalar | *Visual | NORML | NORML | | |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | | |
| Free Water | scalar | *Visual | | NEG | n: Dave Mitchel | - TESAUSTLC |
| | | | | | | Page 1 of 2 |



OIL ANALYSIS REPORT

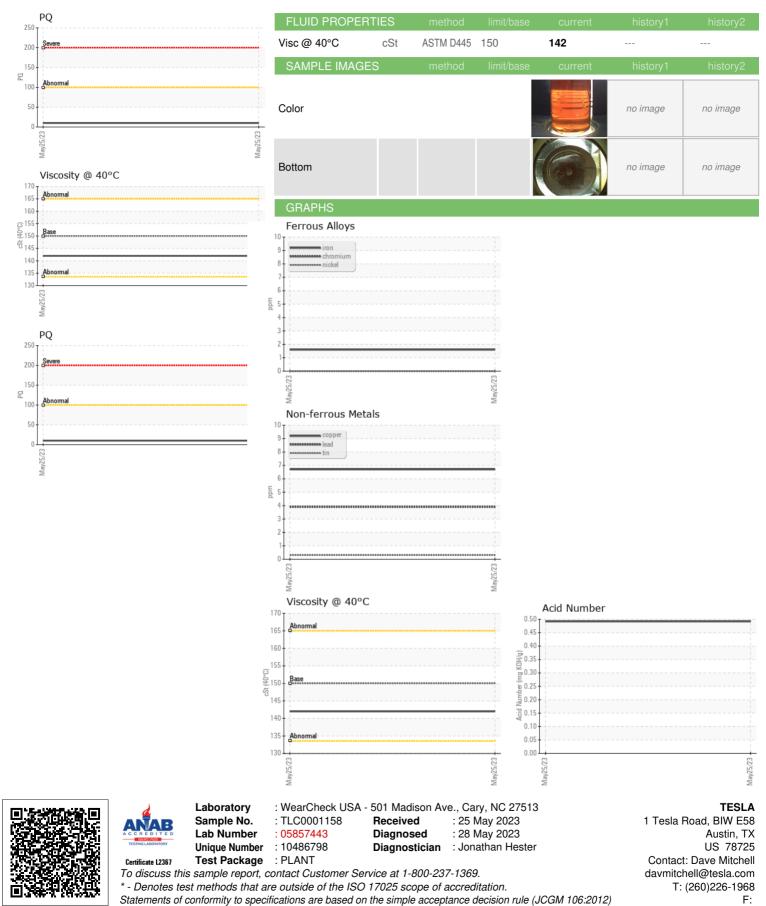

Contact/Location: Dave Mitchell - TESAUSTLC