



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area

**9**

Machine Id


**WINERGY GEARBOX WTG-906 (S/N 4836486-0020-6)**

Component

**Wind Turbine Gearbox**

Fluid

**FUCHS RENOLIN UNISYN CKC ISO 320 (340 LTR)**

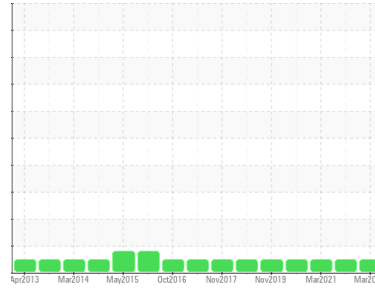

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Analytical Ferrography: Results appear normal, with typical amounts of contamination and ferrous rubbing wear.

### Wear

All component wear rates are normal.

### Contaminants

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0804442</b>	WC05504487	WC0547228
Sample Date	Client Info		<b>07 Mar 2023</b>	02 Feb 2022	10 Mar 2021
Machine Age	mths	Client Info	<b>73</b>	69	120
Oil Age	mths	Client Info	<b>73</b>	0	65
Oil Changed	Client Info		<b>Not Chngd</b>	N/A	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184	>50	<b>18</b>	17	20
Iron	ppm	ASTM D5185m	>65	<b>40</b>	50
Chromium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0
Titanium	ppm	ASTM D5185m	>10	<b>0</b>	0
Silver	ppm	ASTM D5185m		<b>0</b>	<1
Aluminum	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0
Lead	ppm	ASTM D5185m	>5	<b>0</b>	0
Copper	ppm	ASTM D5185m	>10	<b>0</b>	<1
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0
Antimony	ppm	ASTM D5185m	>5	<b>---</b>	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	25	<b>0</b>	0
Barium	ppm	ASTM D5185m		<b>0</b>	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	0
Calcium	ppm	ASTM D5185m	17	<b>6</b>	15
Phosphorus	ppm	ASTM D5185m	200	<b>146</b>	168
Zinc	ppm	ASTM D5185m		<b>30</b>	39
Sulfur	ppm	ASTM D5185m	5000	<b>5108</b>	4105

## CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0
Sodium	ppm	ASTM D5185m		<b>2</b>	2
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0
Water	%	ASTM D6304	>0.03	<b>0.012</b>	0.020
ppm Water	ppm	ASTM D6304	>300	<b>120.2</b>	205.5

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>341</b>	3146	1194
Particles >6µm	ASTM D7647	>5000	<b>27</b>	449	122
Particles >14µm	ASTM D7647	>640	<b>4</b>	27	7
Particles >21µm	ASTM D7647	>160	<b>0</b>	7	4
Particles >38µm	ASTM D7647	>40	<b>0</b>	0	0
Particles >71µm	ASTM D7647	>10	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>--/19/16	<b>16/12/9</b>	19/16/12	17/14/10



# OIL ANALYSIS REPORT

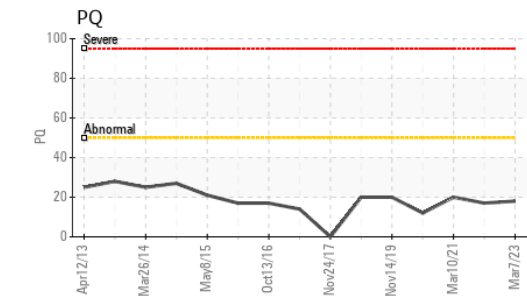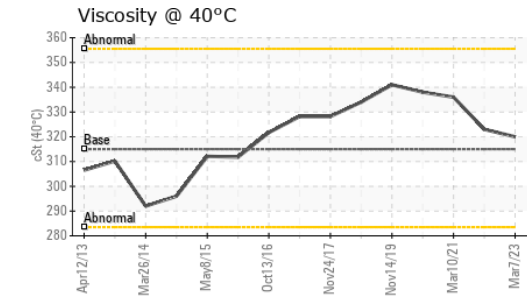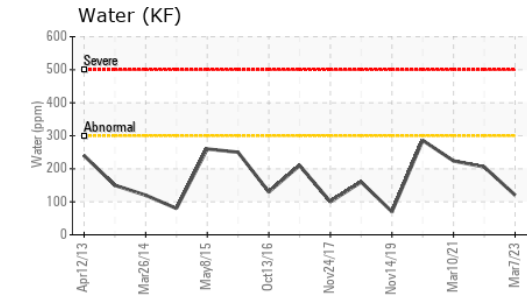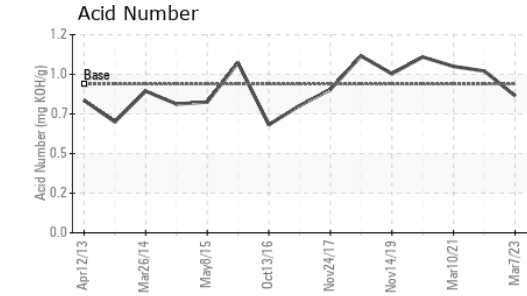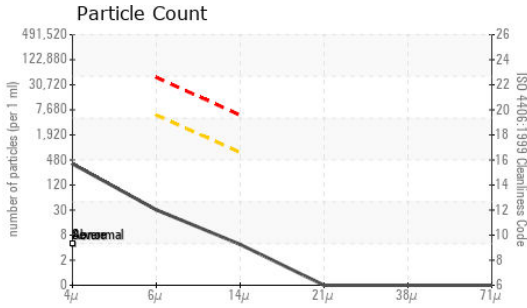

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.9	<b>0.83</b>	0.98	1.008

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.03	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	315	<b>320</b>	323	336

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color			
Bottom			
PrtFilter		no image	no image



**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0804442 **Received** : 26 May 2023  
**Lab Number** : 05857860 **Diagnosed** : 16 Jun 2023  
**Unique Number** : 10492325 **Diagnostician** : Aaron Black  
**Test Package** : IND 3 ( Additional Tests: KF, PrtCount )




**ENERGIA EOLICA**  
 STA ANA KM25 CARRETERA AL SUR, A 1KM DEL CRUCE  
 FRANCISCO MORAZAN, ZZ  
 HN  
 Contact: SANTOS DEL CID  
 sdelcid@dencmi.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:  
 F: x:

# FERROGRAPHY REPORT


Area  
**9**  
 Machine Id  
**WINERGY GEARBOX WTG-906 (S/N 4836486-0020-6)**  
 Component  
**Wind Turbine Gearbox**  
 Fluid  
**FUCHS RENOLIN UNISYN CKC ISO 320 (340 LTR)**

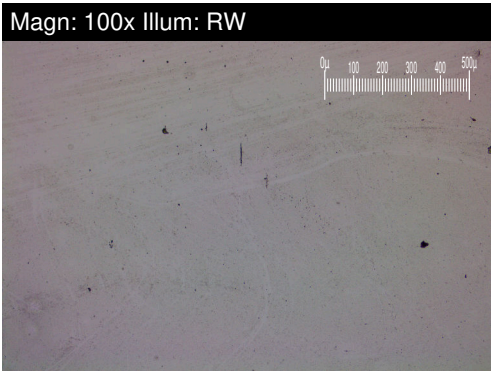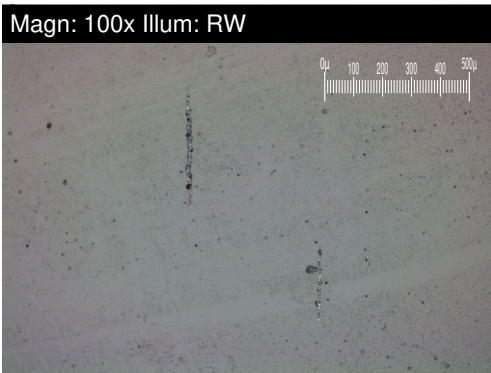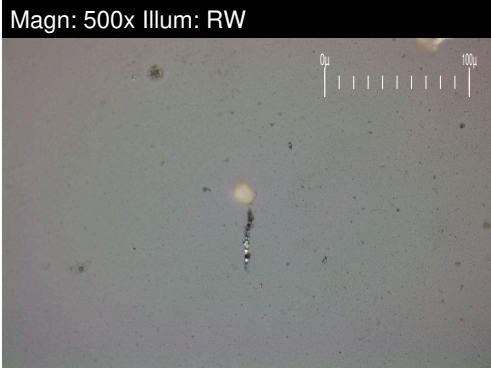

FERROGRAPHY	method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	*ASTM D7684	█ 2		
Ferrous Sliding	Scale 0-10	*ASTM D7684			
Ferrous Cutting	Scale 0-10	*ASTM D7684			
Ferrous Rolling	Scale 0-10	*ASTM D7684			
Ferrous Break-in	Scale 0-10	*ASTM D7684			
Ferrous Spheres	Scale 0-10	*ASTM D7684			
Ferrous Black Oxides	Scale 0-10	*ASTM D7684	█ 1		
Ferrous Red Oxides	Scale 0-10	*ASTM D7684			
Ferrous Corrosive	Scale 0-10	*ASTM D7684			
Ferrous Other	Scale 0-10	*ASTM D7684			
Nonferrous Rubbing	Scale 0-10	*ASTM D7684			
Nonferrous Sliding	Scale 0-10	*ASTM D7684			
Nonferrous Cutting	Scale 0-10	*ASTM D7684			
Nonferrous Rolling	Scale 0-10	*ASTM D7684			
Nonferrous Other	Scale 0-10	*ASTM D7684			
Carbonaceous Material	Scale 0-10	*ASTM D7684			
Lubricant Degradation	Scale 0-10	*ASTM D7684			
Sand/Dirt	Scale 0-10	ASTM D7684			
Fibres	Scale 0-10	*ASTM D7684			
Spheres	Scale 0-10	*ASTM D7684			
Other	Scale 0-10	*ASTM D7684	█ 1		

**WEAR**

All component wear rates are normal.

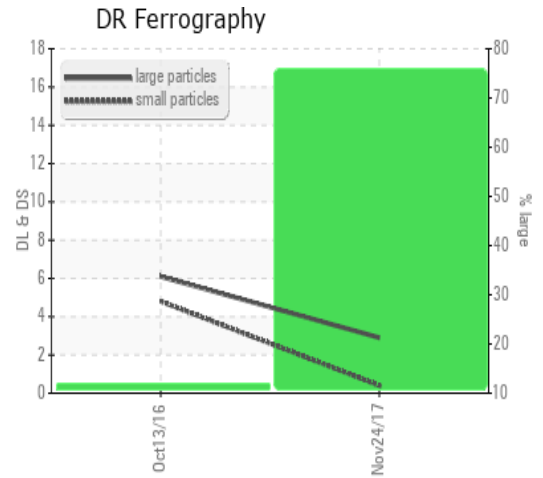

*This page left intentionally blank*