




PROBLEM SUMMARY

Sample Rating Trend

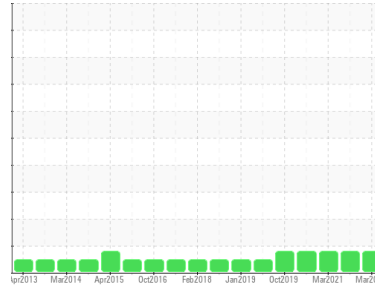

WEAR



Area

3

Machine Id

WINERGY GEARBOX WTG-301 (S/N 4836490-0020-5)

Component


Wind Turbine Gearbox

Fluid

FUCHS RENOLIN UNISYN CKC ISO 320 (340 LTR)

COMPONENT CONDITION SUMMARY

▲ Ferrous Alloys

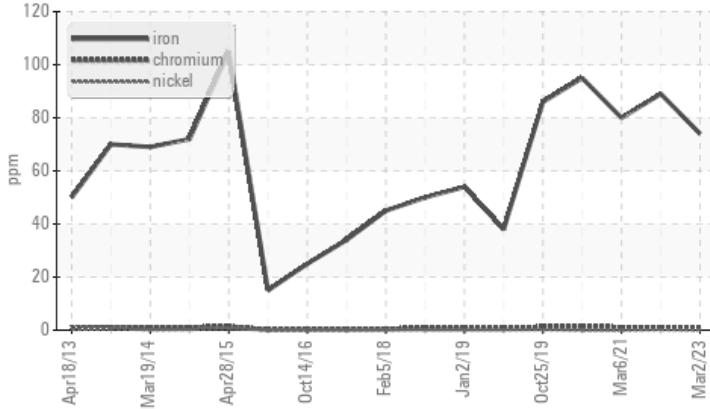

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Analytical Ferrography: Results indicate normal operation, with typical amounts of ferrous rubbing wear and contamination present. Iron in the metals analysis is not present as wear in the Ferrography, and the result has been stable and downward trending, suggesting that this wear is likely submicron-sized and present from time on oil or a similar issue more than any actual wear concern.

PROBLEMATIC TEST RESULTS

Sample Status				MARGINAL	ABNORMAL	ABNORMAL
Iron	ppm	ASTM D5185m	>65	▲ 74	▲ 89	▲ 80
PrtFilter					no image	no image

Customer Id: ENEFRA
 Sample No.: WC0804437
 Lab Number: 05857865
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Aaron Black +1
aaron.black@wearcheck.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

26 Jan 2022 Diag: Aaron Black

WEAR



Resample at the next service interval to monitor. Iron ppm levels are abnormal. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion. Analytical ferrography: wear is normal with typical amounts of ferrous rubbing wear. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable. Analytical ferrography: contamination is normal with typical amounts of external debris present. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



06 Mar 2021 Diag: Don Baldrige

WEAR



No corrective action is recommended at this time. Resample at the next service interval to monitor. The iron level is abnormal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



25 Jul 2020 Diag: Doug Bogart

WEAR



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All ferrographic tests and evaluation performed at WC Canada laboratory. An increase in the iron level is noted. All other component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

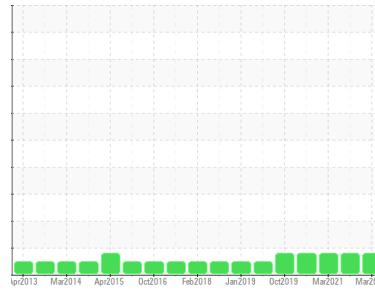

WEAR



Area

3

Machine Id

WINERGY GEARBOX WTG-301 (S/N 4836490-0020-5)

Component

Wind Turbine Gearbox

Fluid

FUCHS RENOLIN UNISYN CKC ISO 320 (340 LTR)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Analytical Ferrography: Results indicate normal operation, with typical amounts of ferrous rubbing wear and contamination present. Iron in the metals analysis is not present as wear in the Ferrography, and the result has been stable and downward trending, suggesting that this wear is likely submicron-sized and present from time on oil or a similar issue more than any actual wear concern.

Wear

Gear wear is indicated.

Contaminants

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0804437	WC05504536	WC0547158
Sample Date	Client Info		02 Mar 2023	26 Jan 2022	06 Mar 2021
Machine Age	mths	Client Info	94	78	120
Oil Age	mths	Client Info	94	0	65
Oil Changed	Client Info		Not Chngd	N/A	Not Chngd
Sample Status			MARGINAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184	>50	16	15	24
Iron	ppm	ASTM D5185m	>65	▲ 74	▲ 89
Chromium	ppm	ASTM D5185m	>3	<1	1
Nickel	ppm	ASTM D5185m	>3	0	<1
Titanium	ppm	ASTM D5185m	>10	0	0
Silver	ppm	ASTM D5185m		0	<1
Aluminum	ppm	ASTM D5185m	>10	<1	0
Lead	ppm	ASTM D5185m	>5	0	0
Copper	ppm	ASTM D5185m	>10	0	<1
Tin	ppm	ASTM D5185m	>10	<1	0
Antimony	ppm	ASTM D5185m	>5	---	---
Vanadium	ppm	ASTM D5185m		0	0
Cadmium	ppm	ASTM D5185m		0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	25	0	0
Barium	ppm	ASTM D5185m		0	0
Molybdenum	ppm	ASTM D5185m		0	0
Manganese	ppm	ASTM D5185m		<1	<1
Magnesium	ppm	ASTM D5185m		0	0
Calcium	ppm	ASTM D5185m	17	<1	<1
Phosphorus	ppm	ASTM D5185m	200	147	175
Zinc	ppm	ASTM D5185m		4	6
Sulfur	ppm	ASTM D5185m	5000	5027	4246


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	0
Sodium	ppm	ASTM D5185m		3	1
Potassium	ppm	ASTM D5185m	>20	<1	0
Water	%	ASTM D6304	>0.03	0.011	0.006
ppm Water	ppm	ASTM D6304	>300	110.0	66.0


FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		676	3818	246
Particles >6µm	ASTM D7647	>5000	58	302	67
Particles >14µm	ASTM D7647	>640	7	16	11
Particles >21µm	ASTM D7647	>160	1	5	6
Particles >38µm	ASTM D7647	>40	0	0	0
Particles >71µm	ASTM D7647	>10	0	0	0
Oil Cleanliness	ISO 4406 (c)	>--/19/16	17/13/10	19/15/11	15/13/11


▲ Ferrous Alloys

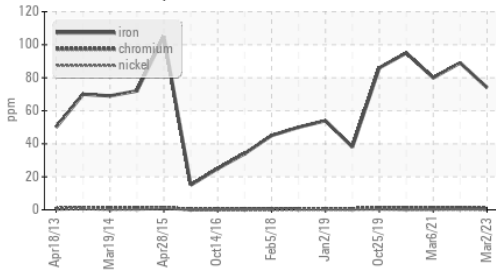


Particle Count

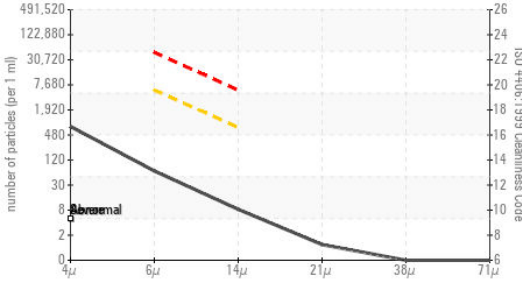


Acid Number

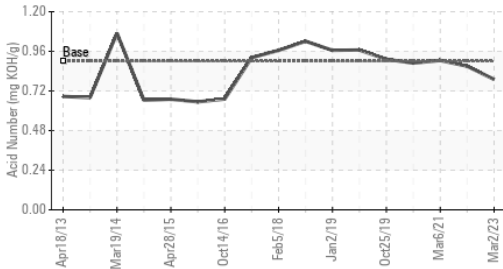

Water (KF)

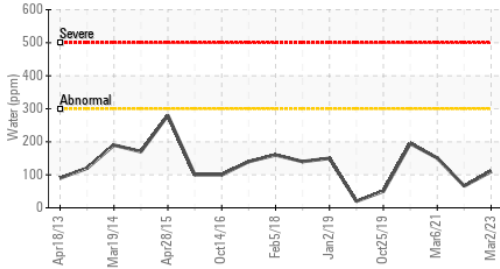

Viscosity @ 40°C

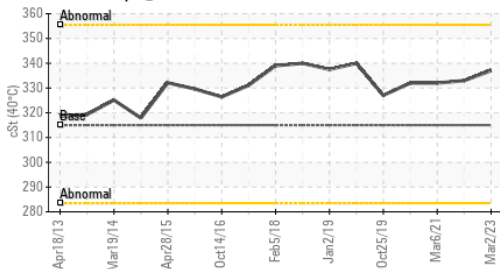

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.9	0.79	0.87	0.905
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.03	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	315	337	333	332

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color				
Bottom				
PrtFilter			no image	no image



Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0804437 **Received** : 26 May 2023
Lab Number : 05857865 **Diagnosed** : 16 Jun 2023
Unique Number : 10492330 **Diagnostician** : Aaron Black
Test Package : IND 2 (Additional Tests: A-FERR, KF, PQ, PrtCount)




ENERGIA EOLICA
 STA ANA KM25 CARRETERA AL SUR, A 1KM DEL CRUCE
 FRANCISCO MORAZAN, ZZ
 HN
 Contact: SANTOS DEL CID
 sdelcid@dencmi.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:
 F: x:

FERROGRAPHY REPORT


Area
3
 Machine Id
WINERGY GEARBOX WTG-301 (S/N 4836490-0020-5)
 Component
Wind Turbine Gearbox
 Fluid
FUCHS RENOLIN UNISYN CKC ISO 320 (340 LTR)

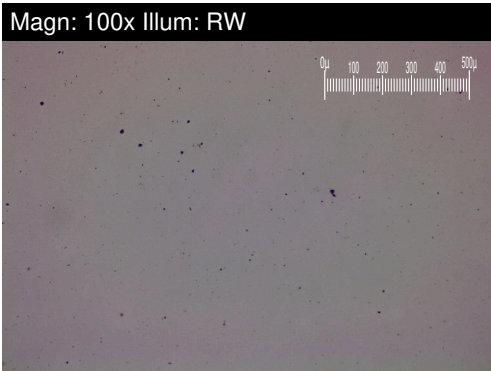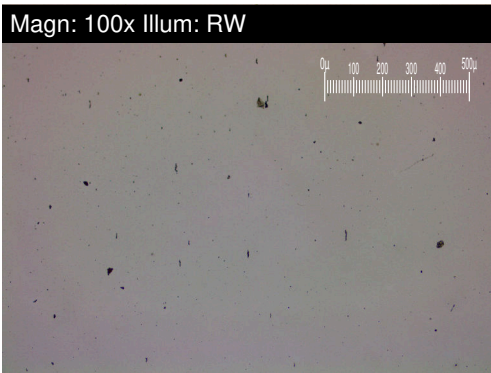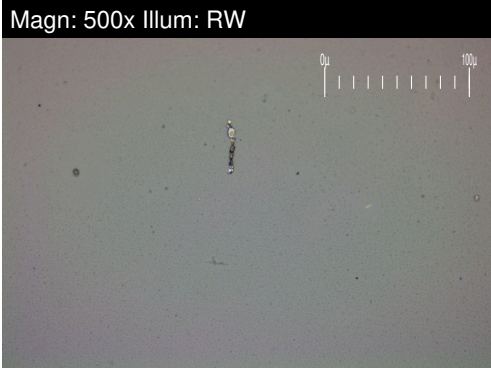

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	*ASTM D7684		1	1	
Ferrous Sliding	Scale 0-10	*ASTM D7684				
Ferrous Cutting	Scale 0-10	*ASTM D7684				
Ferrous Rolling	Scale 0-10	*ASTM D7684				
Ferrous Break-in	Scale 0-10	*ASTM D7684				
Ferrous Spheres	Scale 0-10	*ASTM D7684				
Ferrous Black Oxides	Scale 0-10	*ASTM D7684				
Ferrous Red Oxides	Scale 0-10	*ASTM D7684				
Ferrous Corrosive	Scale 0-10	*ASTM D7684				
Ferrous Other	Scale 0-10	*ASTM D7684				
Nonferrous Rubbing	Scale 0-10	*ASTM D7684				
Nonferrous Sliding	Scale 0-10	*ASTM D7684				
Nonferrous Cutting	Scale 0-10	*ASTM D7684				
Nonferrous Rolling	Scale 0-10	*ASTM D7684				
Nonferrous Other	Scale 0-10	*ASTM D7684				
Carbonaceous Material	Scale 0-10	*ASTM D7684				
Lubricant Degradation	Scale 0-10	*ASTM D7684				
Sand/Dirt	Scale 0-10	ASTM D7684				
Fibres	Scale 0-10	*ASTM D7684				
Spheres	Scale 0-10	*ASTM D7684				
Other	Scale 0-10	*ASTM D7684		1	1	

WEAR

Gear wear is indicated.

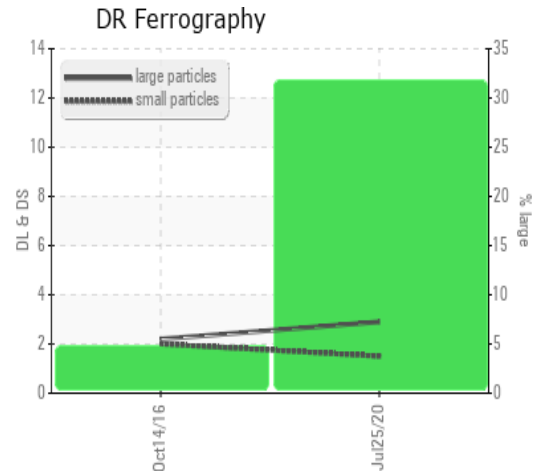

This page left intentionally blank