

OIL ANALYSIS REPORT

Sample Rating Trend



Area **3** Machine Id **WTG-307** Component Hydraulic System Fluid SHELL TELLUS 32 (300 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







OczÓDIG AprZOTI FebZOTIB JuZÓDIB FebZOTIB OczÓDIB AugZÓZZO MucZOZI JunZOZZ MieZOZZ									
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2			
Sample Number		Client Info		WC0804435	WC05504428	WC0547167			
Sample Date		Client Info		02 Mar 2023	07 Jan 2022	06 Mar 2021			
Machine Age	mths	Client Info		0	77	120			
Oil Age	mths	Client Info		0	5	0			
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd			
Sample Status				NORMAL	NORMAL	NORMAL			
WEAR METALS		method	limit/base	current	history1	history2			
PQ		ASTM D8184		13	17				
Iron	ppm	ASTM D5185m	>20	3	<1	2			
Chromium	ppm	ASTM D5185m	>20	5	4	4			
Nickel	ppm	ASTM D5185m	>20	0	0	0			
Titanium	ppm	ASTM D5185m		0	0	0			
Silver	ppm	ASTM D5185m		0	<1	0			
Aluminum	ppm	ASTM D5185m	>20	<1	0	0			
Lead	ppm	ASTM D5185m	>20	0	0	<1			
Copper	ppm	ASTM D5185m	>20	<1	1	2			
Tin	ppm	ASTM D5185m	>20	<1	0	0			
Antimony	ppm	ASTM D5185m				0			
Vanadium	ppm	ASTM D5185m		0	0	0			
Cadmium	ppm	ASTM D5185m		0	0	0			
ADDITIVES		method	limit/base	current	history1	history2			
Boron	ppm	ASTM D5185m		0	0	0			
Barium	ppm	ASTM D5185m		0	0	0			
Molybdenum	ppm	ASTM D5185m		0	0	<1			
Manganese	ppm	ASTM D5185m		<1	0	0			
Magnesium	ppm	ASTM D5185m	11	2	2	3			
Calcium	ppm	ASTM D5185m	35	22	27	24			
Phosphorus	ppm	ASTM D5185m	259	274	291	266			
Zinc	ppm	ASTM D5185m	277	267	286	273			
Sulfur	ppm	ASTM D5185m	1865	3703	2917	3237			
CONTAMINANTS		method	limit/base	current	history1	history2			
Silicon	ppm	ASTM D5185m	>15	<1	0	<1			
Sodium	ppm	ASTM D5185m		1	0	0			
Potassium	ppm	ASTM D5185m	>20	0	0	<1			
Water	%	ASTM D6304	>0.05	0.006	0.004	0.011			
ppm Water	ppm	ASTM D6304	>500	69.4	43.0	110.8			
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2			
Particles >4µm		ASTM D7647	>5000	92	1720	3834			
Particles >6µm		ASTM D7647	>1300	20	585	1224			
Particles >14µm		ASTM D7647	>160	3	84	81			
Particles >21µm		ASTM D7647	>40	1	28	26			
Particles >38µm		ASTM D7647	>10	0	5	3			
Particles >71µm		ASTM D7647	>3	0	0	0			
Oil Cleanliness		ISO 4406 (c)	>19/17/14	14/11/9	18/16/14	19/17/14			



OIL ANALYSIS REPORT

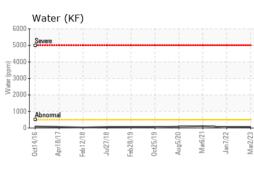




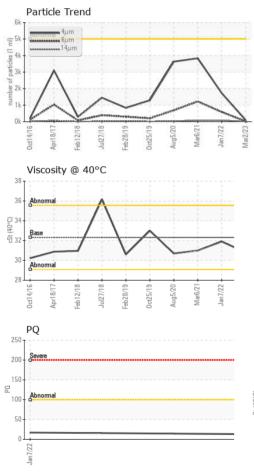


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.32	0.26	0.27	0.280
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32.32	30.8	31.9	31.0
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color

Bottom



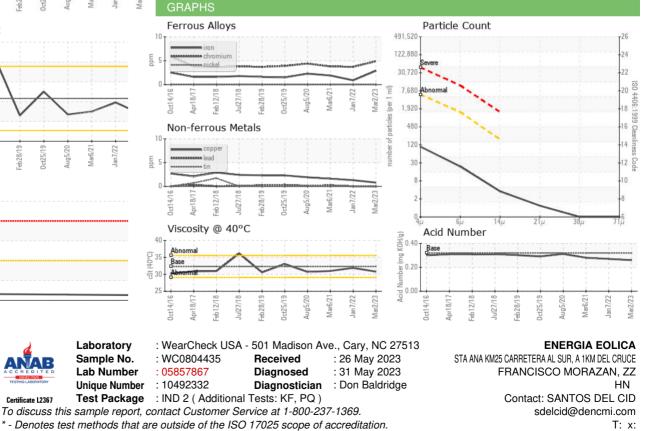

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: SANTOS DEL CID - ENEFRA

F: x: