


OIL ANALYSIS REPORT

Sample Rating Trend





Area 8 Machine Id WTG-808 Component

Hydraulic System

SHELL TELLUS 32 (300 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

0x2015 May2017 Nov2017 Avg2018 Feb2013 Nov2019 Ju2020 Max2021 Feb2022 Feb2023						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0804534	WC05504432	WC0547258
Sample Date		Client Info		28 Feb 2023	03 Feb 2022	16 Mar 2021
Machine Age	mths	Client Info		0	77	0
Oil Age	mths	Client Info		0	5	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		4	17	
Iron	ppm	ASTM D5185m	>20	5	3	3
Chromium	ppm	ASTM D5185m	>20	8	6	6
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>20	<1	0	0
Lead	ppm	ASTM D5185m	>20	0	0	<1
Copper	ppm	ASTM D5185m	>20	4	4	5
Tin	ppm	ASTM D5185m	>20	<1	0	<1
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	11	19	11	4
Calcium	ppm	ASTM D5185m	35	16	18	15
Phosphorus	ppm	ASTM D5185m	259	275	296	258
Zinc	ppm	ASTM D5185m	277	271	272	226
Sulfur	ppm	ASTM D5185m	1865	3085	2917	3312
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	0	<1
Sodium	ppm	ASTM D5185m		3	<1	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water	%	ASTM D6304	>0.05	0.008	0.004	0.008
ppm Water	ppm	ASTM D6304	>500	89.2	44.3	80.5
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		126	11291	9103
Particles >6µm		ASTM D7647	>5000	38	1264	2388
Particles >14µm		ASTM D7647	>640	8	78	259
Particles >21µm		ASTM D7647	>160	3	19	75
Particles >38μm		ASTM D7647	>40	0	3	7



OIL ANALYSIS REPORT

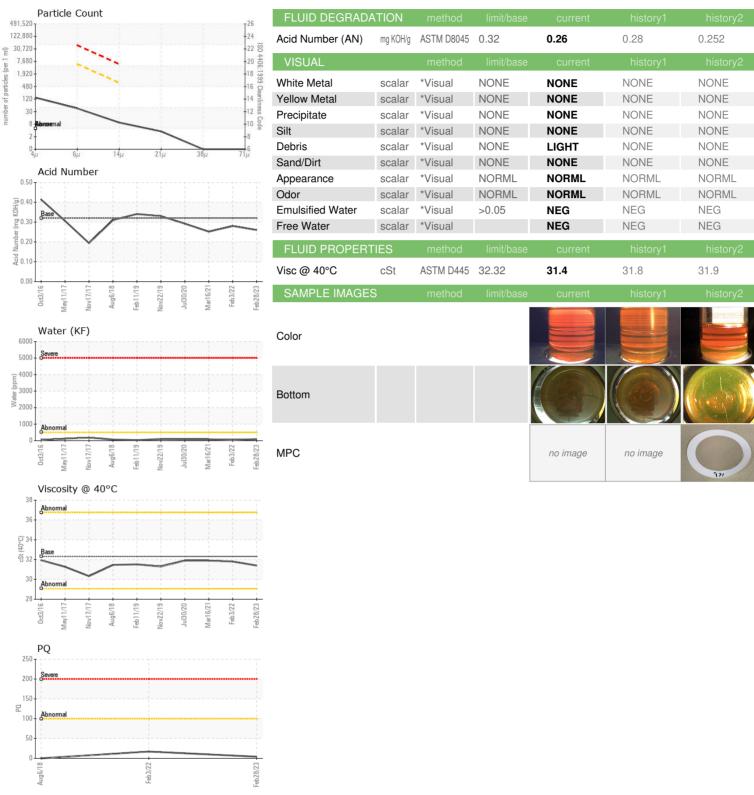





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0804534

: 05857894 : 10492359

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Received : 26 May 2023 Diagnosed Diagnostician

: 30 May 2023 : Jonathan Hester Test Package : IND 2 (Additional Tests: KF, PQ)

ENERGIA EOLICA STA ANA KM25 CARRETERA AL SUR, A 1KM DEL CRUCE FRANCISCO MORAZAN, ZZ

HN

Contact: SANTOS DEL CID

sdelcid@dencmi.com T: x:

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: