


# **OIL ANALYSIS REPORT**

## Sample Rating Trend





## Area 9 Machine Id WTG-904 Component

Hydraulic System

SHELL TELLUS 32 (300 LTR)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Oct2016 May2	017 Nov2017 Jul2018 Feb2	019 Nov2019 Jul2020 Mar2021 Jan2	022 Mar2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0804508	WC05504466	WC0547239
Sample Date		Client Info		07 Mar 2023	31 Jan 2022	10 Mar 2021
Machine Age	mths	Client Info		0	69	120
Oil Age	mths	Client Info		0	5	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		10	15	
Iron	ppm	ASTM D5185m	>20	3	3	6
Chromium	ppm	ASTM D5185m	>20	5	8	13
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>20	<1	0	0
Lead	ppm	ASTM D5185m	>20	0	0	<1
Copper	ppm	ASTM D5185m	>20	2	5	7
Tin	ppm	ASTM D5185m	>20	0	0	<1
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	11	41	21	5
Calcium	ppm	ASTM D5185m	35	15	21	20
Phosphorus	ppm	ASTM D5185m	259	285	299	262
Zinc	ppm	ASTM D5185m	277	311	286	228
Sulfur	ppm	ASTM D5185m	1865	2444	3088	4298
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	0	<1
Sodium	ppm	ASTM D5185m		2	0	0
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water	%	ASTM D6304	>0.05	0.006	0.006	0.011
ppm Water	ppm	ASTM D6304	>500	65.0	67.3	116.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		126	2966	
Particles >6µm		ASTM D7647	>5000	30	668	
Particles >14μm		ASTM D7647	>640	4	90	
Particles >21µm		ASTM D7647	>160	1	26	
Particles >38μm		ASTM D7647	>40	0	6	
Particles >71μm		ASTM D7647	>10	0	0	
Oil Cleanliness		ISO 4406 (c)	>/19/16	14/12/9	19/17/14	



## **OIL ANALYSIS REPORT**

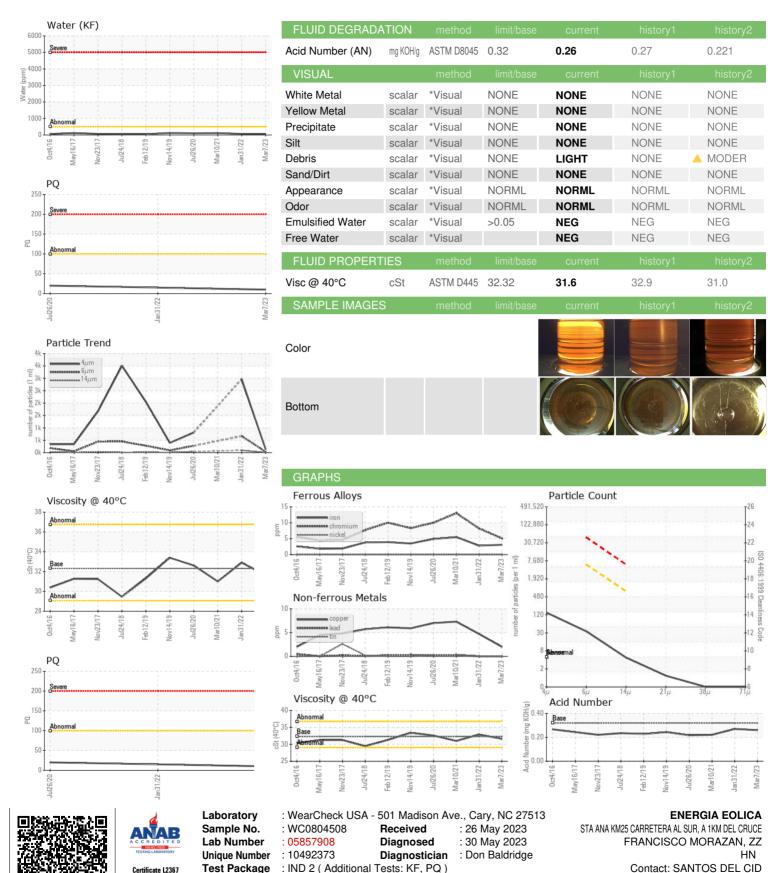

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:

F: x:

sdelcid@dencmi.com