


# **OIL ANALYSIS REPORT**

Sample



NORMAL



# Area **3**Machine Id WINERGY GEARBOX WTG-303 (S/N 4836488-0020-1)

Component

**Wind Turbine Gearbox** 

**FUCHS RENOLIN UNISYN CKC ISO 320 (340 LTR)** 

| וט | A١ | Gľ | ИO | 51 | S |  |
|----|----|----|----|----|---|--|
|    |    |    |    |    |   |  |

## Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

## Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


## **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| 40 LIN)         |        | 4pr2013 Ma   | r2014 Apr2015 Oct201 | 6 Jul2018 Oct2019 Mar20 | 21 Mar2023  |             |
|-----------------|--------|--------------|----------------------|-------------------------|-------------|-------------|
| SAMPLE INFORM   | IATION | method       | limit/base           | current                 | history1    | history2    |
| Sample Number   |        | Client Info  |                      | WC0804457               | WC05504507  | WC0547162   |
| Sample Date     |        | Client Info  |                      | 02 Mar 2023             | 27 Jan 2022 | 06 Mar 2021 |
| Machine Age     | mths   | Client Info  |                      | 100                     | 83          | 120         |
| Oil Age         | mths   | Client Info  |                      | 100                     | 0           | 65          |
| Oil Changed     |        | Client Info  |                      | Not Changd              | N/A         | Not Changd  |
| Sample Status   |        |              |                      | NORMAL                  | NORMAL      | NORMAL      |
| WEAR METALS     |        | method       | limit/base           | current                 | history1    | history2    |
| PQ              |        | ASTM D8184   | >50                  | 11                      | 15          | 18          |
| Iron            | ppm    | ASTM D5185m  | >65                  | 19                      | 34          | 38          |
| Chromium        | ppm    | ASTM D5185m  | >3                   | <1                      | <1          | <1          |
| Nickel          | ppm    | ASTM D5185m  | >3                   | 0                       | 0           | 0           |
| Titanium        | ppm    | ASTM D5185m  | >10                  | 0                       | 0           | 0           |
| Silver          | ppm    | ASTM D5185m  |                      | 0                       | <1          | 0           |
| Aluminum        | ppm    | ASTM D5185m  | >10                  | <1                      | 0           | 0           |
| Lead            | ppm    | ASTM D5185m  | >5                   | 0                       | 0           | 0           |
| Copper          | ppm    | ASTM D5185m  | >10                  | 0                       | 0           | <1          |
| Tin             | ppm    | ASTM D5185m  | >10                  | 0                       | 0           | <1          |
| Antimony        | ppm    | ASTM D5185m  | >5                   |                         |             | 0           |
| Vanadium        | ppm    | ASTM D5185m  |                      | 0                       | 0           | 0           |
| Cadmium         | ppm    | ASTM D5185m  |                      | 0                       | 0           | 0           |
| ADDITIVES       |        | method       | limit/base           | current                 | history1    | history2    |
| Boron           | ppm    | ASTM D5185m  | 25                   | <1                      | 0           | 4           |
| Barium          | ppm    | ASTM D5185m  |                      | 0                       | 0           | 0           |
| Molybdenum      | ppm    | ASTM D5185m  |                      | 0                       | 0           | 0           |
| Manganese       | ppm    | ASTM D5185m  |                      | <1                      | <1          | <1          |
| Magnesium       | ppm    | ASTM D5185m  |                      | <1                      | 0           | 0           |
| Calcium         | ppm    | ASTM D5185m  | 17                   | 0                       | <1          | 2           |
| Phosphorus      | ppm    | ASTM D5185m  | 200                  | 97                      | 133         | 137         |
| Zinc            | ppm    | ASTM D5185m  |                      | 0                       | 13          | <1          |
| Sulfur          | ppm    | ASTM D5185m  | 5000                 | 5045                    | 4186        | 3949        |
| CONTAMINANTS    |        | method       | limit/base           | current                 | history1    | history2    |
| Silicon         | ppm    | ASTM D5185m  | >15                  | 0                       | 0           | 0           |
| Sodium          | ppm    | ASTM D5185m  |                      | <1                      | 0           | 2           |
| Potassium       | ppm    | ASTM D5185m  | >20                  | <1                      | 0           | 0           |
| Water           | %      | ASTM D6304   | >0.03                | 0.005                   | 0.016       | 0.018       |
| ppm Water       | ppm    | ASTM D6304   | >300                 | 54.1                    | 162.2       | 189.9       |
| FLUID CLEANLIN  | ESS    | method       | limit/base           | current                 | history1    | history2    |
| Particles >4µm  |        | ASTM D7647   |                      | 313                     | 2079        | 87          |
| Particles >6µm  |        | ASTM D7647   | >5000                | 74                      | 306         | 29          |
| Particles >14µm |        | ASTM D7647   | >640                 | 8                       | 20          | 5           |
| Particles >21µm |        | ASTM D7647   | >160                 | 2                       | 5           | 2           |
| Particles >38µm |        | ASTM D7647   | >40                  | 1                       | 0           | 0           |
| Particles >71µm |        | ASTM D7647   | >10                  | 1                       | 0           | 0           |
| Oil Cleanliness |        | ISO 4406 (c) | >/19/16              | 15/13/10                | 18/15/11    | 14/12/10    |
|                 |        | ` /          |                      |                         |             |             |



# **OIL ANALYSIS REPORT**

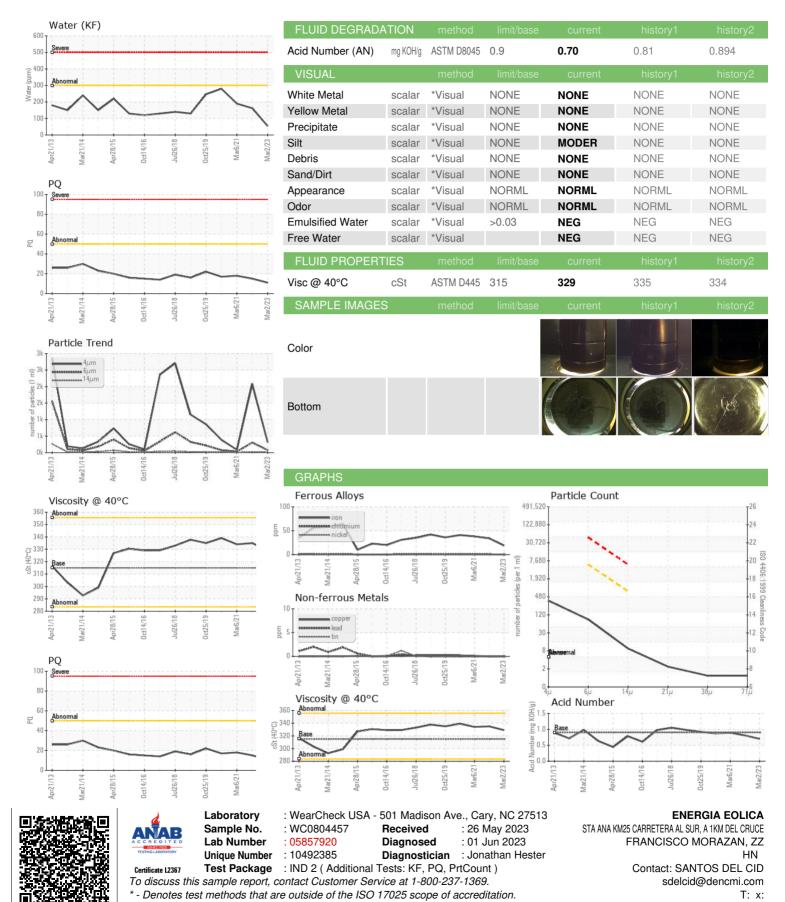

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: