


Area  
**Paper Cup Machines**  
 Machine Id  
**PMC 1002 POS-230 (S/N 150603)**  
 Component  
**Circulating System**  
 Fluid  
**SUMMIT Syngear SH-1032 320 (85 GAL)**

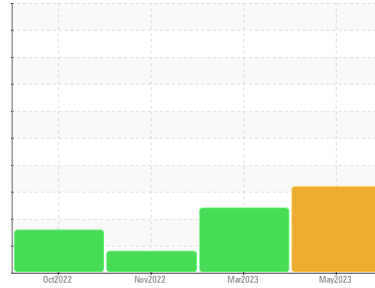

**DIAGNOSIS**

**Recommendation**  
 We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. ( Customer Sample Comment: Collected by CS )

**Wear**  
 All component wear rates are normal.

**Contamination**  
 Appearance is hazy. There is a high amount of visible silt present in the sample. There is a light concentration of water present in the oil.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>TO50001765</b>	TO50001429	TO50001202
Sample Date	Client Info		<b>23 May 2023</b>	03 Mar 2023	28 Nov 2022
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ATTENTION	MARGINAL

**WEAR METALS**

	method	limit/base	current	history1	history2
PQ	ASTM D8184		<b>26</b>	31	30
Iron	ppm	ASTM D5185m	<b>32</b>	35	32
Chromium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	<b>0</b>	4	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	<b>2</b>	1	2
Lead	ppm	ASTM D5185m	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	<b>6</b>	7	7
Tin	ppm	ASTM D5185m	<b>1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

**ADDITIVES**

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>33</b>	35	40
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	2	<1
Magnesium	ppm	ASTM D5185m	<b>1</b>	0	0
Calcium	ppm	ASTM D5185m	<b>1</b>	1	<1
Phosphorus	ppm	ASTM D5185m	<b>557</b>	497	505
Zinc	ppm	ASTM D5185m	<b>0</b>	0	2
Sulfur	ppm	ASTM D5185m	<b>7577</b>	6937	6637






**CONTAMINANTS**

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<b>3645</b>	2027	2878
Sodium	ppm	ASTM D5185m	<b>1</b>	<1	1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	0
Water	%	ASTM D6304	<b>▲ 0.153</b>	---	---
ppm Water	ppm	ASTM D6304	<b>▲ 1530</b>	---	---

**FLUID DEGRADATION**

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.70</b>	---	---


# OIL ANALYSIS REPORT

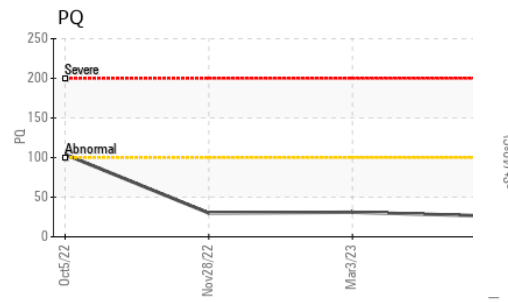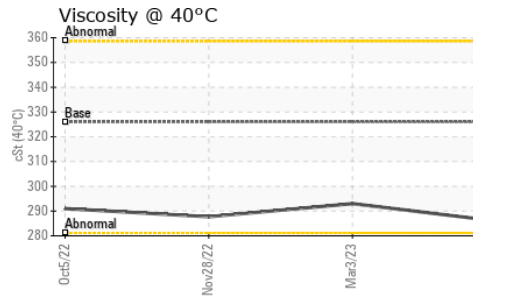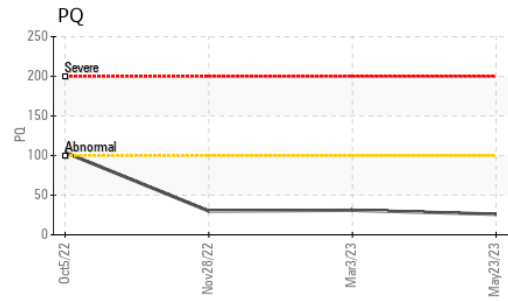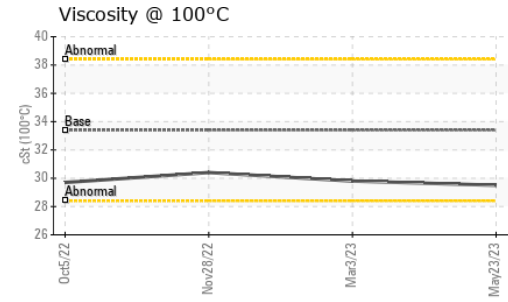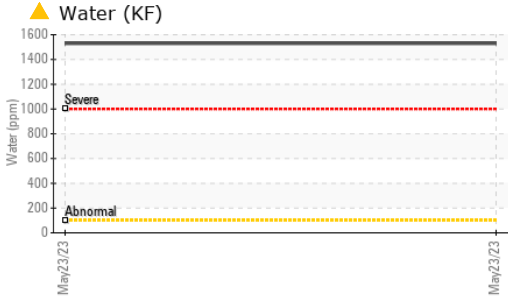





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	▲ HEAVY	NONE	▲ MODER
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	▲ HAZY	▲ SOLID	HAZY
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	▲ 0.2%	NEG	NEG
Free Water	scalar	*Visual	NEG	▲ 10.0	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	326	286	293	287.7
Visc @ 100°C	cSt	ASTM D445	33.4	29.5	29.8	30.4
Viscosity Index (VI)	Scale	ASTM D2270	145	139	138	143

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

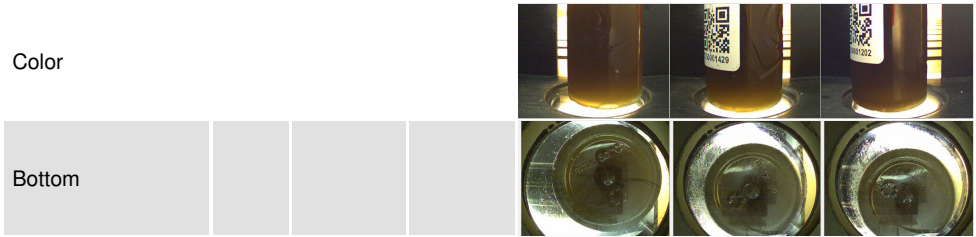

## GRAPHS

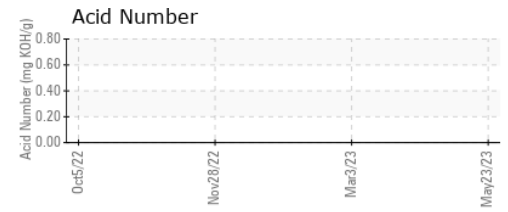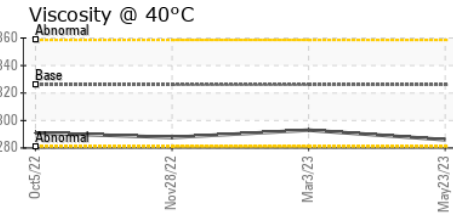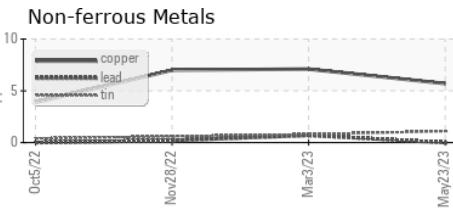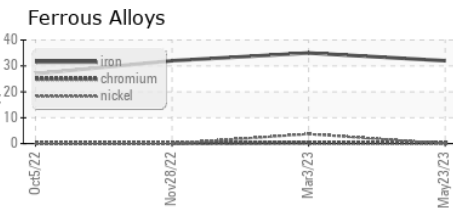

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO50001765 **Recieved** : 26 May 2023  
**Lab Number** : 05857981 **Diagnosed** : 30 May 2023  
**Unique Number** : 10492446 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF, KV100, PQ, PrtCount, VI )

**DART CONTAINER CORPORATION**  
 4444 W LEADBETTER DR  
 DALLAS, TX  
 US 75236  
 Contact: YON PALOMINO  
 yon.palomino@dart.biz  
 T: (214)775-5673  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)