

### **PROBLEM SUMMARY**


Sample Rating Trend

ISO

# KAESER SK 15 AIRCENTER 5957579 (S/N 2187)


Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)





### **COMPONENT CONDITION SUMMARY**

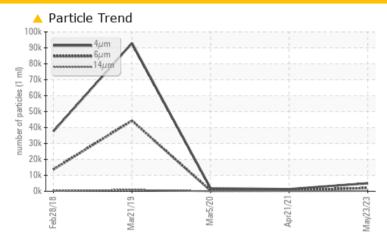

### RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS							
Sample Status			ABNORMAL	ATTENTION	NORMAL		
Particles >6µm	ASTM D7647	>1300	<u>^</u> 2071	594	471		
Particles >14µm	ASTM D7647	>80	<b>230</b>	<b>1</b> 09	38		
Particles >21µm	ASTM D7647	>20	<b>47</b>	<u>^</u> 28	13		
Oil Cleanliness	ISO 4406 (c)	>/17/13	<b>20/18/15</b>	<u> </u>	16/12		

**Customer Id: FREDOY** Sample No.: KC107820 Lab Number: 05860862 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 ihester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

#### **RECOMMENDED ACTIONS**

Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

### HISTORICAL DIAGNOSIS

#### 21 Apr 2021 Diag: Jonathan Hester

ISO



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



### 05 Mar 2020 Diag: Don Baldridge

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



### 21 Mar 2019 Diag: Doug Bogart

ISO



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





### **OIL ANALYSIS REPORT**

Sample Rating Trend



## **KAESER SK 15 AIRCENTER 595**

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

**DIAGNOSIS** 

### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


57579 (S/N 2	:187)	Feb.2016	Mar2019		May/2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC107820	KC64539	KC72491
Sample Date		Client Info		23 May 2023	21 Apr 2021	05 Mar 2020
Machine Age	hrs	Client Info		11846	7333	5076
Oil Age	hrs	Client Info		2422	2257	1803
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	3	2	1
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m			0	0

Copper	ppm	HICOLCA INLOW	>50	ა	2	I
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	14	<1
Barium	ppm	ASTM D5185m	90	<1	0	5
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	44	57	78
Calcium	ppm	ASTM D5185m	2	1	0	2
Phosphorus	ppm	ASTM D5185m		<1	<1	2
Zinc	ppm	ASTM D5185m		6	2	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	2	2
Sodium	ppm	ASTM D5185m		9	18	19
Potassium	ppm	ASTM D5185m	>20	2	1	2
Water	%	ASTM D6304	>0.05	0.024	0.031	0.029

Coalain	PPIII	710 THI DO 100111		•	10	10
Potassium	ppm	ASTM D5185m	>20	2	1	2
Water	%	ASTM D6304	>0.05	0.024	0.031	0.029
ppm Water	ppm	ASTM D6304	>500	244.4	316.6	294.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		5024	1358	1874
Particles >6μm		ASTM D7647	>1300	<u> </u>	594	471
Particles >14μm		ASTM D7647	>80	<b>230</b>	<u> </u>	38
Particles >21µm		ASTM D7647	>20	<b>47</b>	<u>^</u> 28	13
Particles >38µm		ASTM D7647	>4	2	2	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 20/18/15	<b>△</b> 16/14	16/12
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.37	0.363	0.411



### **OIL ANALYSIS REPORT**

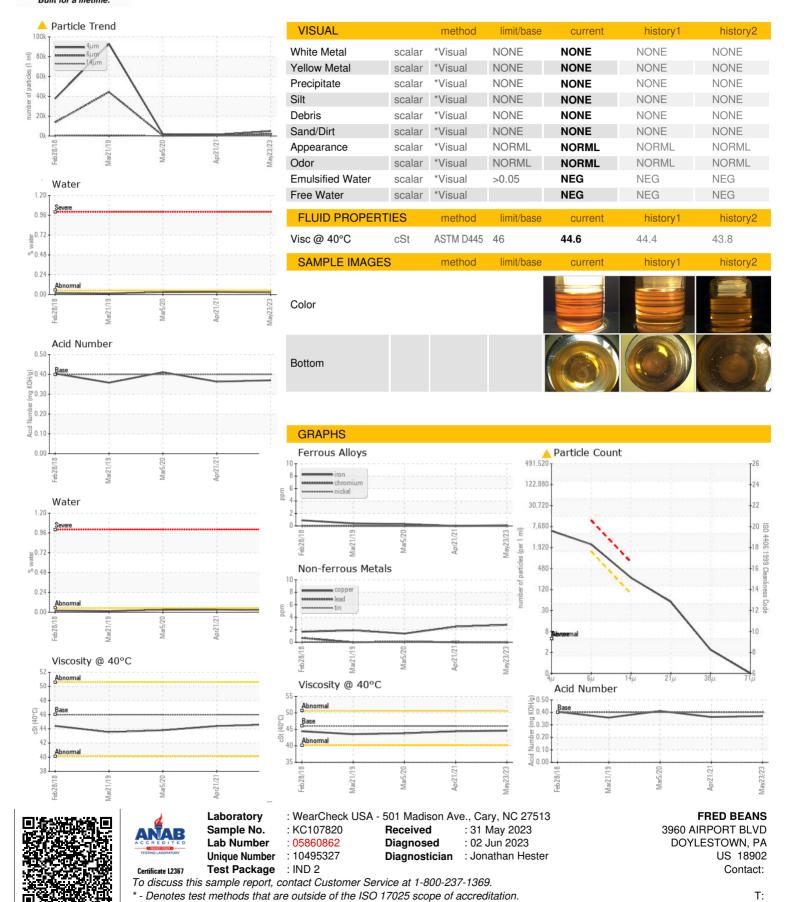

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: