






# PROBLEM SUMMARY

Area  
**Mobile Fleet**  
 Machine Id  
**7215 7215**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL MOBILFLUID 424 (27 GAL)**

Sample Rating Trend

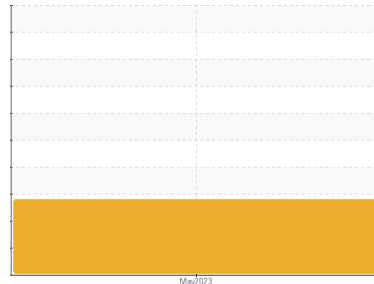

## COMPONENT CONDITION SUMMARY

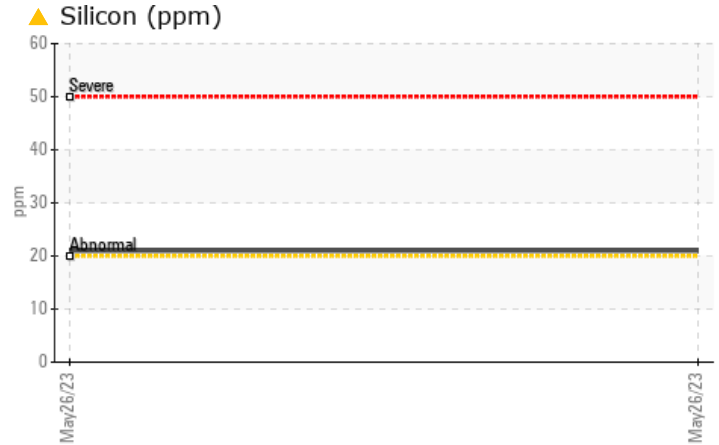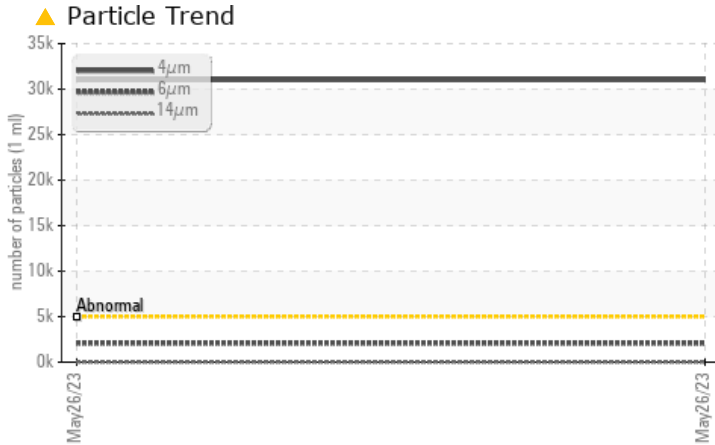

## RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			<b>ABNORMAL</b>	---	---	
Silicon	ppm	ASTM D5185m	>20	<b>▲ 21</b>	---	---
Particles >4µm		ASTM D7647	>5000	<b>▲ 31014</b>	---	---
Particles >6µm		ASTM D7647	>1300	<b>▲ 2086</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>▲ 22/18/11</b>	---	---

Customer Id: CARBUTNC  
 Sample No.: WC0819048  
 Lab Number: 05862912  
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Angela Borella +1 800-237-1369  
[angela.borella@wearcheckusa.com](mailto:angela.borella@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS


Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

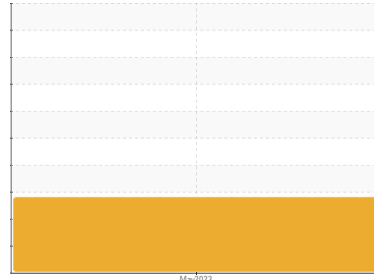

**DIRT**



Area  
**Mobile Fleet**  
 Machine Id  
**7215 7215**

Component  
**Hydraulic System**  
 Fluid  
**MOBIL MOBILFLUID 424 (27 GAL)**

## DIAGNOSIS

### ▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0819048</b>	---	---
Sample Date	Client Info		<b>26 May 2023</b>	---	---
Machine Age	Client Info		<b>2585</b>	---	---
Oil Age	Client Info		<b>1040</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

CONTAMINATION	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	---	---

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>20	<b>5</b>	---	---
Chromium	ppm ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm ASTM D5185m	>10	<b>&lt;1</b>	---	---
Titanium	ppm ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm ASTM D5185m	>10	<b>3</b>	---	---
Lead	ppm ASTM D5185m	>10	<b>1</b>	---	---
Copper	ppm ASTM D5185m	>75	<b>3</b>	---	---
Tin	ppm ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm ASTM D5185m		<b>0</b>	---	---

ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m		<b>63</b>	---	---
Barium	ppm ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm ASTM D5185m		<b>4</b>	---	---
Manganese	ppm ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm ASTM D5185m		<b>58</b>	---	---
Calcium	ppm ASTM D5185m		<b>2880</b>	---	---
Phosphorus	ppm ASTM D5185m		<b>956</b>	---	---
Zinc	ppm ASTM D5185m		<b>1245</b>	---	---
Sulfur	ppm ASTM D5185m		<b>4527</b>	---	---


CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>20	<b>▲ 21</b>	---	---
Sodium	ppm ASTM D5185m		<b>7</b>	---	---
Potassium	ppm ASTM D5185m	>20	<b>3</b>	---	---

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 31014</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>▲ 2086</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>19</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>3</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>0</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 22/18/11</b>	---	---


FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045		<b>0.60</b>	---	---

# OIL ANALYSIS REPORT

### Particle Trend

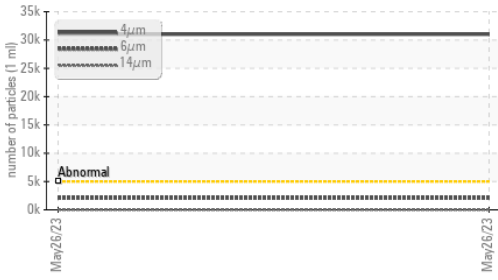

### Silicon (ppm)

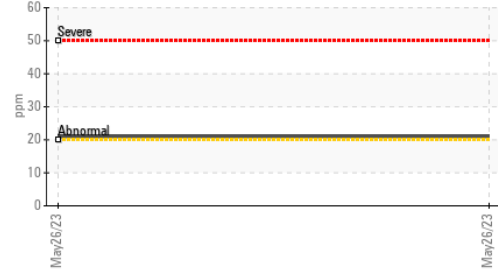


### Silicon (ppm)



### Acid Number



### Viscosity @ 40°C

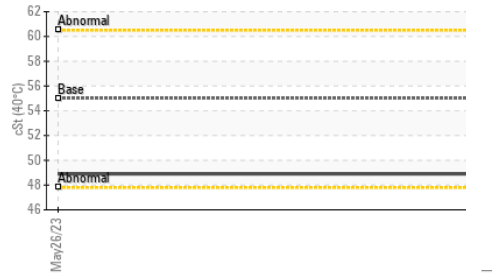





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---
Free Water	scalar	*Visual		<b>NEG</b>	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	55	<b>48.9</b>	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

### GRAPHS

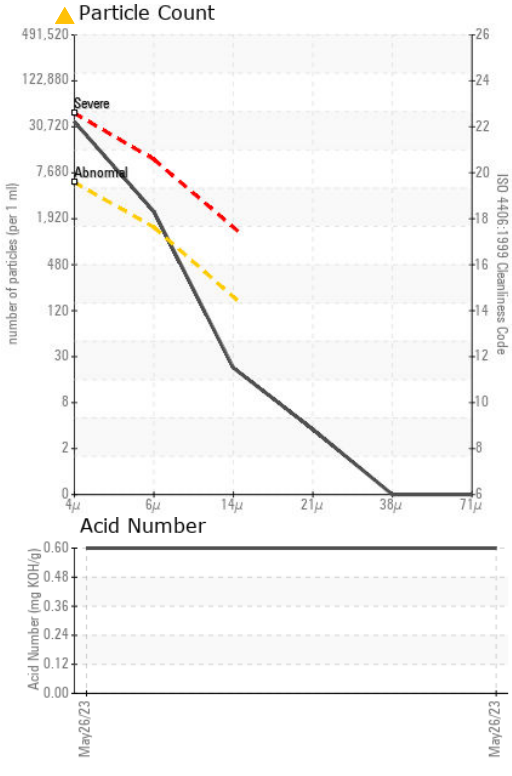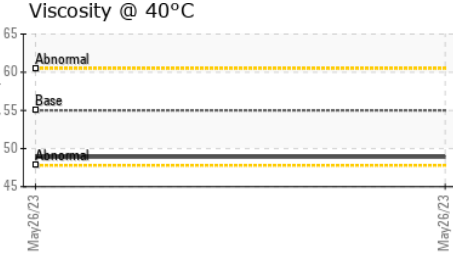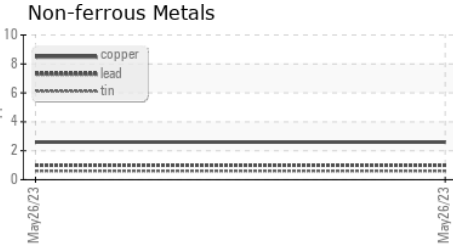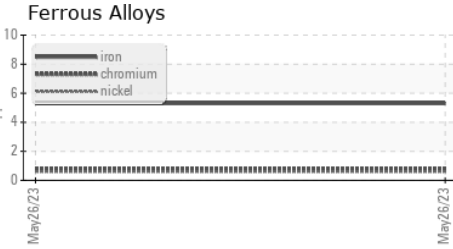

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0819048 **Received** : 02 Jun 2023  
**Lab Number** : 05862912 **Diagnosed** : 05 Jun 2023  
**Unique Number** : 10497377 **Diagnostician** : Angela Borella  
**Test Package** : CONST

**CAROLINA SUNROCK**  
 PO BOX 25  
 BUTNER, NC  
 US 27509  
 Contact: Leigh Dennis  
 rdennis@thesunrockgroup.com  
 T: (919)575-4505  
 F: (919)575-0162

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)