

OIL ANALYSIS REPORT

NOT GIVEN KFS0000221

Component

Hydraulic System

AW HYDRAULIC OIL ISO 100 (--- GAL)

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend you service the filters on this component. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sample	Rating Trend		 ISO
	Jun 20	3	


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KFS0000221		
Sample Date		Client Info		01 Jun 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
CONTAMINATION	1	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	<1		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	9		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
Molybdenum	ppm	ASTM D5185m	5	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	25	0		
Calcium	ppm	ASTM D5185m	200	37		
Phosphorus	ppm	ASTM D5185m	300	358		
Zinc	ppm	ASTM D5185m	370	409		
Sulfur	ppm	ASTM D5185m	2500	1006		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	4498		
Particles >6µm		ASTM D7647	>1300	1363		
Particles >14µm		ASTM D7647	>160	86		
Particles >21µm		ASTM D7647	>40	21		
Particles >38μm		ASTM D7647	>10	1		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/18/14		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN)

mg KOH/g ASTM D8045 0.57



OIL ANALYSIS REPORT

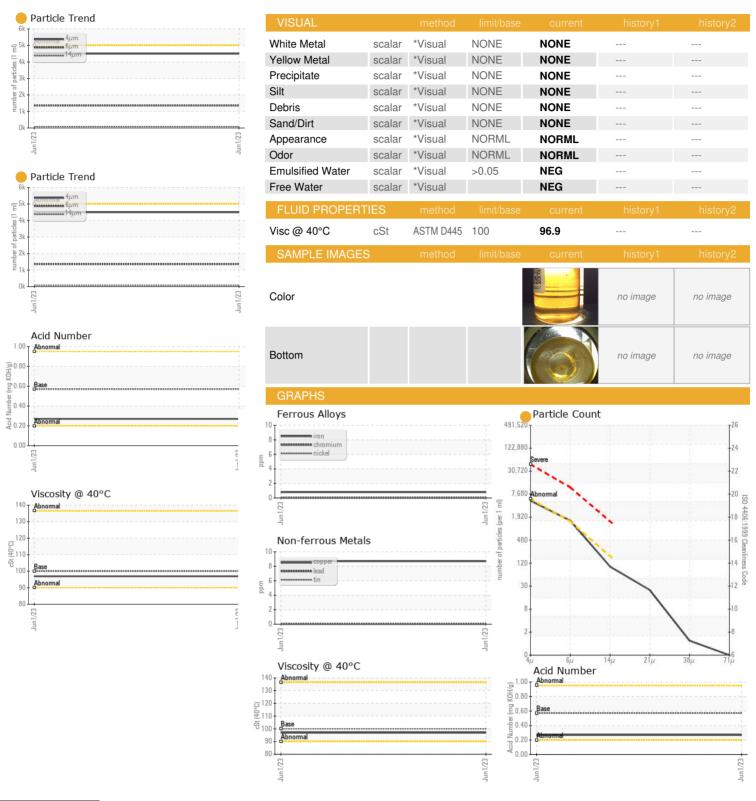





Certificate L2367

Laboratory Sample No.

: KFS0000221 Lab Number : 05864230 Unique Number: 10498695 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

: 05 Jun 2023 **Tested** : 06 Jun 2023 Diagnosed

: 06 Jun 2023 - Wes Davis

NASHVILLE, TN

US 37203 Contact: CHRIS HIGGINS chiggins@kimbrooil.com T: (270)305-1347

KIMBRO OIL COMPANY

2200 CLIFTON AVE

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)