

OIL ANALYSIS REPORT

NORMAL



INGERSOLL RAND V-7635

Component

Compressor

IR/TECHTROL GOLD III (--- GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| SAMPLE INFORM | MATION | method | limit/base | May2023 Current | history1 | history2 |
|---------------|----------|-------------|------------|--------------------|----------|----------|
| Sample Number | VIZTIOIN | Client Info | mmobase | CCSI2012166 | | |
| Sample Date | | Client Info | | 04 May 2023 | | |
| Machine Age | hrs | Client Info | | 25000 | | |
| Oil Age | hrs | Client Info | | 25000 | | |
| Oil Changed | 0 | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 4 | | |
| Chromium | ppm | | >10 | 0 | | |
| Nickel | ppm | ASTM D5185m | | 0 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >25 | <1 | | |
| Lead | ppm | ASTM D5185m | >25 | 0 | | |
| Copper | ppm | ASTM D5185m | >50 | <1 | | |
| Tin | ppm | ASTM D5185m | >15 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 382 | | |
| Molybdenum | ppm | ASTM D5185m | | 0 | | |
| Manganese | ppm | ASTM D5185m | | 0 | | |
| Magnesium | ppm | ASTM D5185m | | 0 | | |
| Calcium | ppm | ASTM D5185m | | <1 | | |
| Phosphorus | ppm | ASTM D5185m | | 4 | | |
| Zinc | ppm | ASTM D5185m | | 0 | | |
| Sulfur | ppm | ASTM D5185m | | 513 | | |
| CONTAMINANTS | 3 | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | 3 | | |
| Sodium | ppm | ASTM D5185m | | 1 | | |
| Potassium | ppm | ASTM D5185m | >20 | <1 | | |

Sample Rating Trend

| Phosphorus | ppm | ASTM D5185m | | 4 | | |
|-------------------|----------|--------------|------------|----------|----------|----------|
| Zinc | ppm | ASTM D5185m | | 0 | | |
| Sulfur | ppm | ASTM D5185m | | 513 | | |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | 3 | | |
| Sodium | ppm | ASTM D5185m | | 1 | | |
| Potassium | ppm | ASTM D5185m | >20 | <1 | | |
| FLUID CLEANLINESS | | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >10000 | 4901 | | |
| Particles >6µm | | ASTM D7647 | >2500 | 1653 | | |
| Particles >14µm | | ASTM D7647 | >320 | 267 | | |
| Particles >21µm | | ASTM D7647 | >80 | 79 | | |
| Particles >38µm | | ASTM D7647 | >20 | 8 | | |
| Particles >71μm | | ASTM D7647 | >4 | 1 | | |
| Oil Cleanliness | | ISO 4406 (c) | >20/18/15 | 19/18/15 | | |
| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.348 | | |



OIL ANALYSIS REPORT

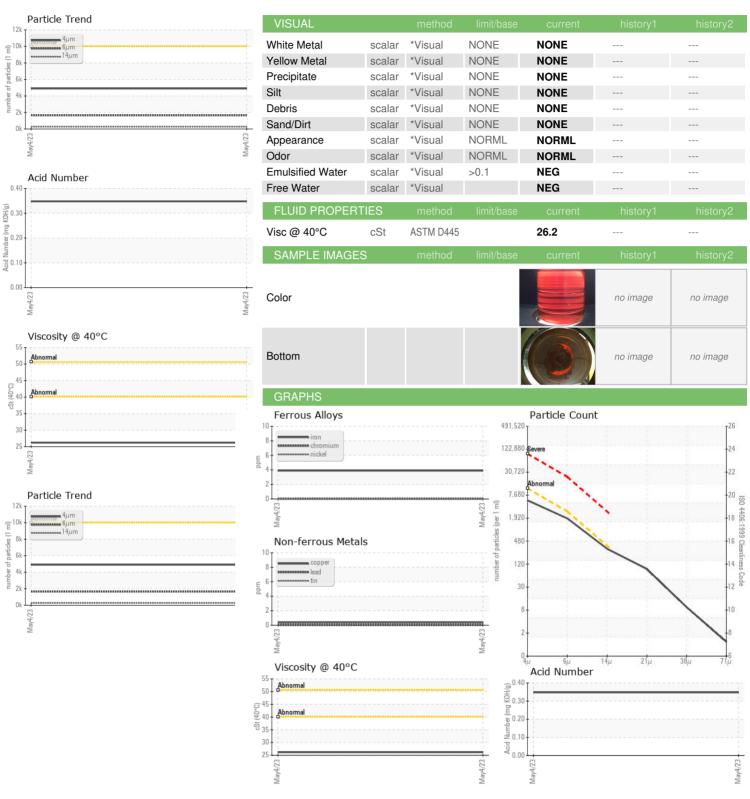





Certificate L2367

Laboratory

Sample No. Lab Number **Unique Number**

: 05864267 : 10498732

: CCSI2012166

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 05 Jun 2023 Diagnosed

: 06 Jun 2023 : Doug Bogart Diagnostician

Test Package : IND 2 (Additional Tests: PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

INGERSOLL RAND COLOMBIA

KM 25 PARQUE INDUSTRIAL, PORTOS SALOANA 80

BOGOTA, ZZ

Contact: BERNARDO GONZALEZ

bernardo.gonzalez@irco.com

Contact/Location: BERNARDO GONZALEZ - INGBOG

T:

F:

CO