

OIL ANALYSIS REPORT

Sample Rating Trend



Area **FRONTIER II [200006776] 66WEA86940**

Component Wind Turbine Gearbox Fluid FUCHS RENOLIN CLP ISO 320 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Aug202	1 Nov2021	Sep2022 A	pr2023	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		NX05867858	NX05639646	NX05391904
Sample Date		Client Info		20 Apr 2023	12 Sep 2022	03 Nov 2021
Machine Age	hrs	Client Info		0	5195	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>80	15	6	20
Iron	ppm	ASTM D5185m	>150	17	13	5
Chromium	ppm	ASTM D5185m	>5	<1	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m	>10	0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>10	<1	<1	0
Lead	ppm	ASTM D5185m	>20	0	<1	0
Copper	ppm	ASTM D5185m	>50	1	1	<1
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m	>5			0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		5	6	13
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		<1	0	<1
Calcium	ppm	ASTM D5185m		4	7	8
Phosphorus	ppm	ASTM D5185m		163	192	75
Zinc	ppm	ASTM D5185m		0	2	0
Sulfur	ppm	ASTM D5185m		6244	4714	4260
CONTAMINANTS						
		method	limit/base	current	history1	history2
Silicon		Method ASTM D5185m	limit/base	current 4	history1 5	history2 3
	ppm ppm					
Silicon	ppm ppm	ASTM D5185m	>50	4	5	3
Silicon Sodium	ppm	ASTM D5185m ASTM D5185m	>50 >20	4 3	5	3 <1
Silicon Sodium Potassium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>50 >20 >20	4 3 0	5 1 0	3 <1 <1
Silicon Sodium Potassium Water	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>50 >20 >20 >0.05	4 3 0 0.006	5 1 0 0.001	3 <1 <1 0.005
Silicon Sodium Potassium Water ppm Water	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>50 >20 >20 >0.05 >500	4 3 0 0.006 69.6	5 1 0 0.001 4.8	3 <1 0.005 59.0
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>50 >20 >20 >0.05 >500 limit/base	4 3 0 0.006 69.6 current	5 1 0 0.001 4.8 history1	3 <1 <1 0.005 59.0 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>50 >20 >20 >0.05 >500 limit/base	4 3 0 0.006 69.6 current 4068	5 1 0 0.001 4.8 history1 14710	3 <1 <1 0.005 59.0 history2 13407
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>50 >20 >20 >500 limit/base >2500 >2500 >320	4 3 0 0.006 69.6 <u>current</u> 4068 1098	5 1 0 0.001 4.8 history1 14710 860	3 <1 <1 0.005 59.0 history2 13407 2062
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>50 >20 >20 >500 limit/base >2500 >2500 >320	4 3 0 0.006 69.6 <u>current</u> 4068 1098 43	5 1 0 0.001 4.8 history1 14710 860 44	3 <1 <1 0.005 59.0 history2 13407 2062 136
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>50 >20 >20 >500 limit/base >2500 >320 >80 >20	4 3 0 0.006 69.6 current 4068 1098 43 8	5 1 0 0.001 4.8 history1 14710 860 44 9	3 <1 <1 0.005 59.0 history2 13407 2062 136 17



OIL ANALYSIS REPORT


Bottom

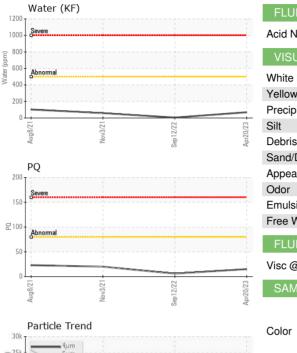

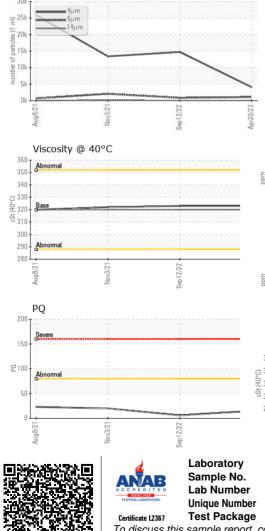

FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.56	0.54	0.538
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	323	323	322
SAMPLE IMAGES	5	method	limit/base	current	history1	history2



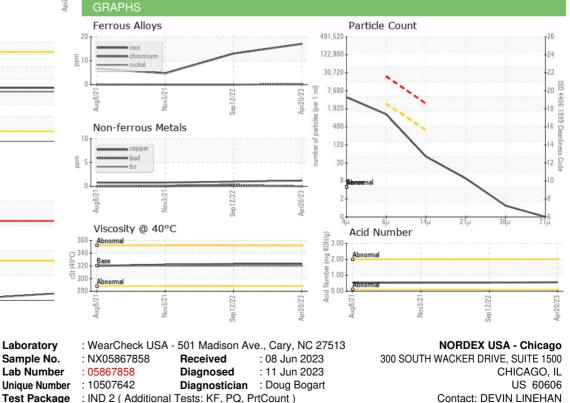

DLinehan@nordex-online.com To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: DEVIN LINEHAN - NORDEX

T: (312)386-4124

F: (312)386-7102