

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area FRONTIER II [200006776] Machine Id 39WEA86892

Component Wind Turbine Gearbox Fluid FUCHS RENOLIN CLP ISO 320 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Jun202	1 0et2021	May2022 M	ay2023	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		NX05867861	NX05565465	NX05391873
Sample Date		Client Info		16 May 2023	16 May 2022	09 Oct 2021
Machine Age	hrs	Client Info		13468	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>80	17	19	18
Iron	ppm	ASTM D5185m	>150	21	12	8
Chromium	ppm	ASTM D5185m	>5	<1	0	0
Nickel	ppm	ASTM D5185m	>10	0	<1	<1
Titanium	ppm	ASTM D5185m	>10	0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	0
Lead	ppm	ASTM D5185m	>20	0	<1	0
Copper	ppm	ASTM D5185m	>50	<1	<1	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m	>5			0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		4	5	11
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		0	<1	<1
Calcium	ppm	ASTM D5185m		6	9	11
Phosphorus	ppm	ASTM D5185m		158	187	91
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		6209	4846	4550
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	9	3	3
Sodium	ppm	ASTM D5185m	>20	4	1	1
Potassium	ppm	ASTM D5185m	>20	0	<1	<1
Water	%	ASTM D6304	>0.05	0.006	0.004	0.009
ppm Water	ppm	ASTM D6304	>500	68.6	45.0	90.9
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		8285	2267	2157
Particles >6µm		ASTM D7647	>2500	1897	84	334
Particles >14µm		ASTM D7647	>320	135	8	24
Particles >21µm		ASTM D7647	>80	29	3	4
Particles >38μm		ASTM D7647	>20	2	0	0
Particles >71µm		ASTM D7647	>4	1	0	0
Oil Cleanliness		ISO 4406 (c)	>/18/15	20/18/14	18/14/10	18/16/12



Water

0ct9/21

Mav16/22

/lav1


Color

Bottom


0.12 0.10 Sev 0.08 0.06 Ab 0.04 0.02 0.00

OIL ANALYSIS REPORT

FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.58	0.55	0.509
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	316	321	327
SAMPLE IMAGES	S	method	limit/base	current	history1	history2

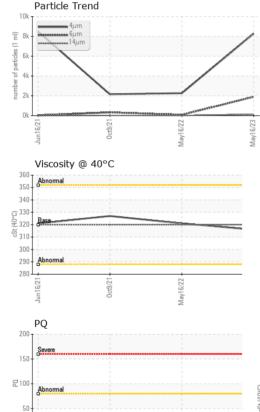

	Thistory 2
149 P	

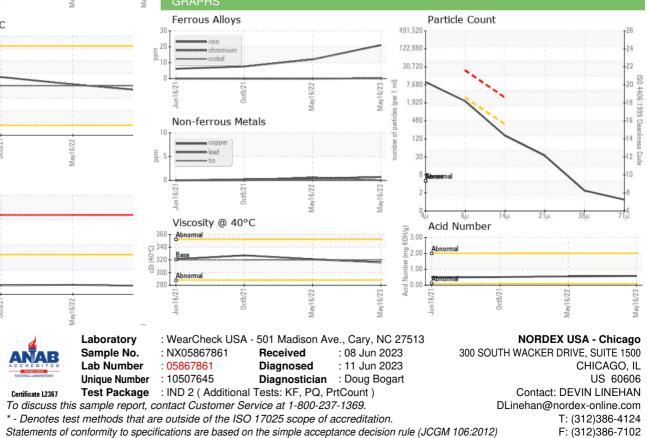

Contact/Location: DEVIN LINEHAN - NORDEX