OIL ANALYSIS REPORT

Sample Rating Trend

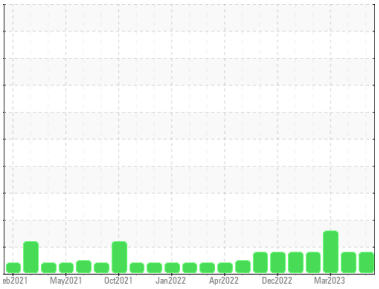

ISO

Area
[CONHER]
Machine Id
Flota Barda - Barda1 HS
Component
Hydraulic System
Fluid
QUAKER STATE DUPLEX AW HYDRAULIC 68 (1000 LTR)

DIAGNOSIS

Recommendation
No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**KL0012372**	KL0012345	KL0012334
Sample Date		Client Info		**03 Jun 2023**	29 Apr 2023	28 Mar 2023
Machine Age	mths	Client Info		**33**	32	31
Oil Age	mths	Client Info		**33**	32	31
Oil Changed		Client Info		**Not Changd**	Not Changd	Not Changd
Sample Status				**ABNORMAL**	ABNORMAL	ATTENTION

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	**3**	3	2
Chromium	ppm	ASTM D5185m	>10	**0**	0	0
Nickel	ppm	ASTM D5185m	>10	**0**	<1	0
Titanium	ppm	ASTM D5185m		**<1**	0	0
Silver	ppm	ASTM D5185m		**0**	0	0
Aluminum	ppm	ASTM D5185m	>10	**<1**	0	0
Lead	ppm	ASTM D5185m	>10	**0**	<1	0
Copper	ppm	ASTM D5185m	>75	**<1**	<1	1
Tin	ppm	ASTM D5185m	>10	**0**	<1	0
Vanadium	ppm	ASTM D5185m		**0**	0	0
Cadmium	ppm	ASTM D5185m		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	4.0	**0**	0	0
Barium	ppm	ASTM D5185m	0.0	**0**	0	0
Molybdenum	ppm	ASTM D5185m	0.0	**0**	0	<1
Manganese	ppm	ASTM D5185m		**0**	<1	<1
Magnesium	ppm	ASTM D5185m	0.1	**2**	7	6
Calcium	ppm	ASTM D5185m	54	**55**	34	36
Phosphorus	ppm	ASTM D5185m	272	**148**	149	141
Zinc	ppm	ASTM D5185m	357	**171**	170	166
Sulfur	ppm	ASTM D5185m	2434	**2338**	2482	2321

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	**2**	2	1
Sodium	ppm	ASTM D5185m		**9**	7	3
Potassium	ppm	ASTM D5185m	>20	**0**	2	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		**47938**	32000	10061
Particles >6µm		ASTM D7647	>1300	▲ **7529**	▲ 3483	▲ 1693
Particles >14µm		ASTM D7647	>160	**158**	46	▲ 171
Particles >21µm		ASTM D7647	>40	**17**	7	▲ 62
Particles >38µm		ASTM D7647	>10	**1**	1	4
Particles >71µm		ASTM D7647	>3	**0**	1	0
Oil Cleanliness		ISO 4406 (c)	>17/14	▲ **20/14**	▲ 19/13	▲ 18/15

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.5	**0.21**	0.17	0.18

OIL ANALYSIS REPORT

Particle Trend

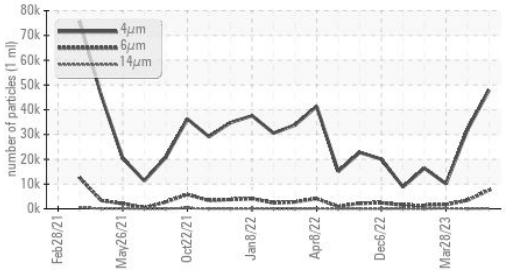

Particle Trend

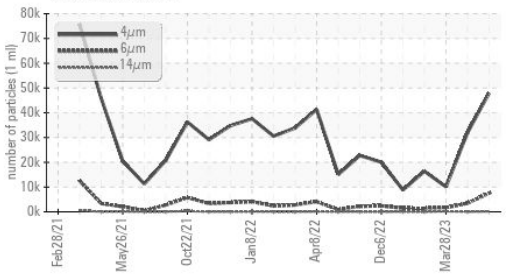

Acid Number

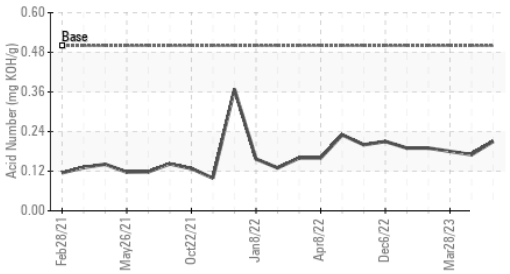

Viscosity @ 40°C

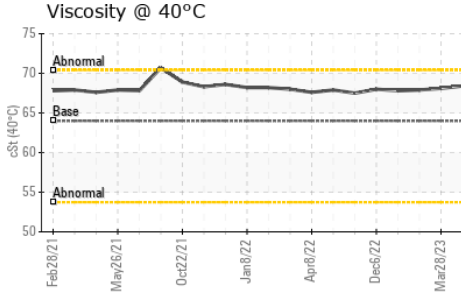

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**NONE**	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	**NEG**	NEG	0.2%
Free Water	scalar	*Visual		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	64	**68.4**	68.4	68.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom			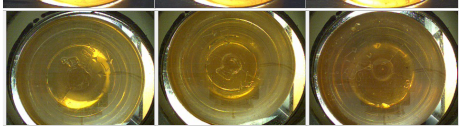		

GRAPHS

Ferrous Alloys

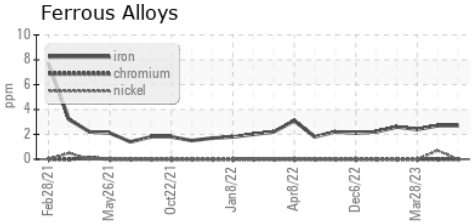

Non-ferrous Metals

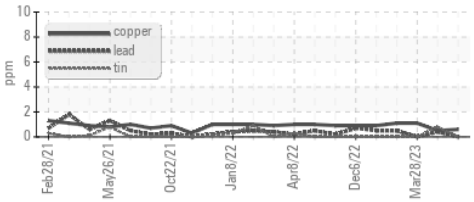

Viscosity @ 40°C

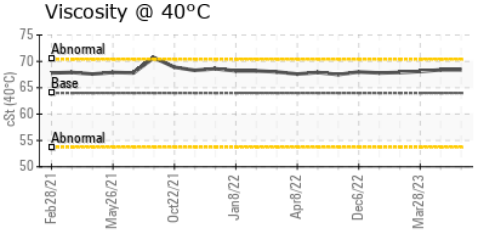

Particle Count

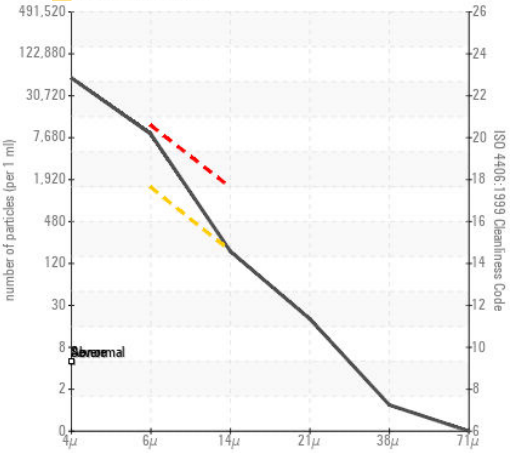

Acid Number

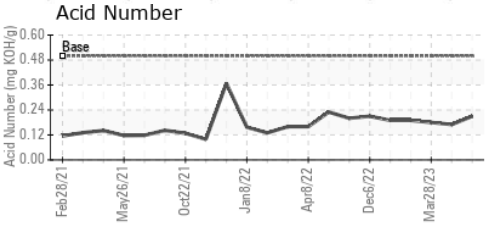

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0012372 **Received** : 09 Jun 2023
Lab Number : 05870264 **Diagnosed** : 13 Jun 2023
Unique Number : 10510048 **Diagnostician** : Don Baldridge
Test Package : MOB 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CONOR
JUAREZ 348
HERMOSILLO,
MX 83140
Contact: EDUARDO GARCIA
egarcia.comsa@gmail.com
T: (526)622-1581 x:81
F: x: