



# OIL ANALYSIS REPORT



Machine Id  
**EX-17**  
 Component  
**Hydraulic System**  
 Fluid  
 {not provided} (75 GAL)

## Sample Rating Trend



ISO



## DIAGNOSIS

### Recommendation

The filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KFS0003964</b>	---	---
Sample Date	Client Info	<b>01 Jun 2023</b>	---	---
Machine Age	hrs	Client Info	<b>5745</b>	---
Oil Age	hrs	Client Info	<b>0</b>	---
Oil Changed	Client Info	<b>Not Changed</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	---

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	<b>9</b>	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---
Silver	ppm	ASTM D5185m		<b>0</b>	---
Aluminum	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---
Lead	ppm	ASTM D5185m	>10	<b>0</b>	---
Copper	ppm	ASTM D5185m	>75	<b>7</b>	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>1</b>	---
Barium	ppm	ASTM D5185m		<b>0</b>	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---
Magnesium	ppm	ASTM D5185m		<b>79</b>	---
Calcium	ppm	ASTM D5185m		<b>878</b>	---
Phosphorus	ppm	ASTM D5185m		<b>666</b>	---
Zinc	ppm	ASTM D5185m		<b>845</b>	---
Sulfur	ppm	ASTM D5185m		<b>2516</b>	---

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>20	<b>3</b>	---
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---





## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 14877</b>	---
Particles >6µm	ASTM D7647	>1300	<b>▲ 4600</b>	---
Particles >14µm	ASTM D7647	>160	<b>▲ 393</b>	---
Particles >21µm	ASTM D7647	>40	<b>● 66</b>	---
Particles >38µm	ASTM D7647	>10	<b>1</b>	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 21/19/16</b>	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.48</b>	---

# OIL ANALYSIS REPORT

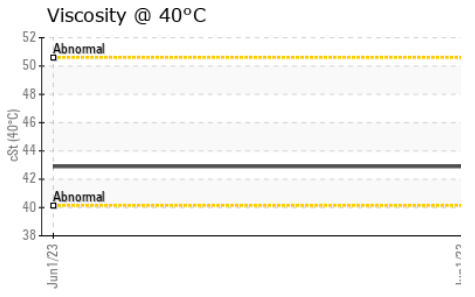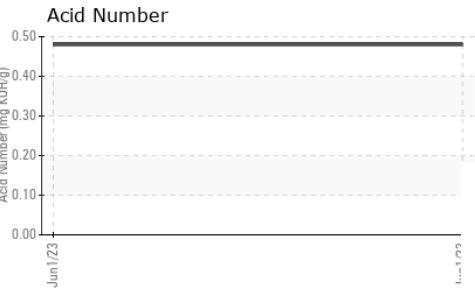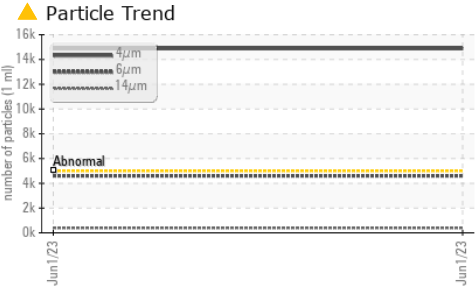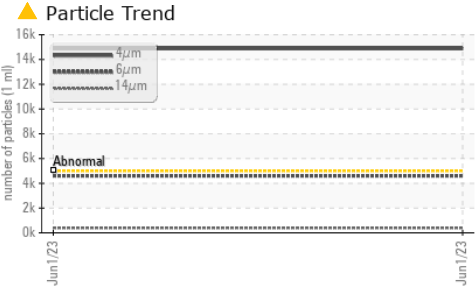





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	42.9	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

## GRAPHS

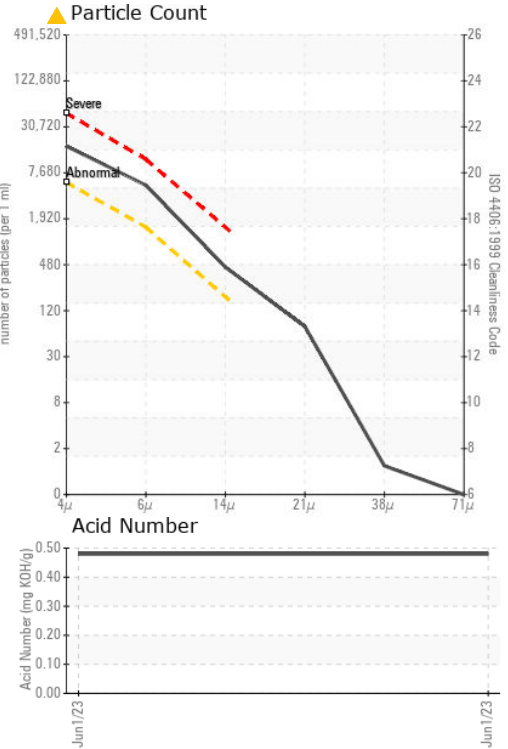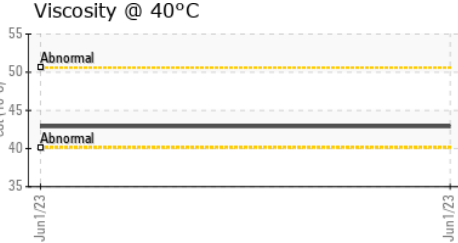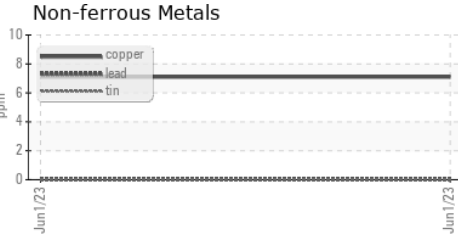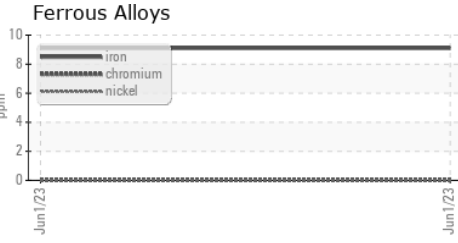

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KFS0003964      **Received** : 09 Jun 2023  
**Lab Number** : 05870268      **Tested** : 12 Jun 2023  
**Unique Number** : 10510052      **Diagnosed** : 12 Jun 2023 - Wes Davis  
**Test Package** : MOB 2

**HARNES LLC**  
 855 N JAMES CAMPBELL BLVD  
 COLUMBIA, TN  
 US 38401  
 Contact: BEN HARNES  
 ben@slectharness.com  
 T: (615)733-4480  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)