

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

MYCOM S-1 (S/N 1653585)

Refrigeration Compressor Fluid MYCOM MYCOLD AB68 (--- GAL)

Recommendation

Resample at the next service interval to monitor. Please note that this is a corrected copy for data entry updates.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP241198	USP241201	
Sample Date		Client Info		09 Jun 2023	21 Dec 2022	
Machine Age	hrs	Client Info		64162	64161	
Oil Age	hrs	Client Info		64162	64161	
Oil Changed		Client Info		Not Changd	Not Changd	
Sample Status				NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	<1	
Chromium	ppm	ASTM D5185m	>2	0	0	
Nickel	ppm	ASTM D5185m		0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>3	0	0	
Lead	ppm	ASTM D5185m	>2	0	0	
Copper	ppm	ASTM D5185m		0	0	
Tin	ppm	ASTM D5185m	>4	0	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m		0	0	
Calcium	ppm	ASTM D5185m		0	0	
Phosphorus	ppm	ASTM D5185m	2.3	0	<1	
Zinc	ppm	ASTM D5185m		0	0	
Sulfur	ppm	ASTM D5185m	26	5	35	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	0	
Sodium	ppm	ASTM D5185m		0	0	
Potassium	ppm	ASTM D5185m	>20	0	1	
Water	%	ASTM D6304	>0.01	0.003	0.00	
ppm Water	ppm	ASTM D6304	>100	31.6	0.00	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	4447	5721	
Particles >6µm		ASTM D7647	>2500	402	527	
Particles >14µm		ASTM D7647	>320	8	12	
Particles >21µm		ASTM D7647	>80	2	2	
Particles >38µm		ASTM D7647	>20	0	0	
Particles >71µm		ASTM D7647	>4	0	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	19/16/10	20/16/11	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.01	0.015	0.015	

Contact/Location: ANDREY BEREZHNOY - LINPORSAC Page 1 of 2




OIL ANALYSIS REPORT

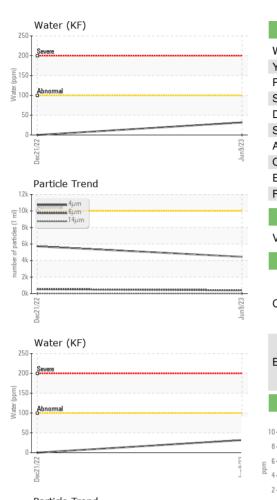



B

	VISUAL		method	limit/base	current	history1	history2
	White Metal	scalar	*Visual	NONE	NONE	NONE	
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
	Precipitate	scalar	*Visual	NONE	NONE	NONE	
-	Silt	scalar	*Visual	NONE	NONE	NONE	
	Debris	scalar	*Visual	NONE	NONE	NONE	
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Jun9/23	Appearance	scalar	*Visual	NORML	NORML	NORML	
Lu Lu	Odor	scalar	*Visual	NORML	NORML	NORML	
	Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	
	Free Water	scalar	*Visual		NEG	NEG	
	FLUID PROPERT	IES	method	limit/base	current	history1	history2
	Visc @ 40°C	cSt	ASTM D445	58.09	77.6	77.1	
	SAMPLE IMAGES	8	method	limit/base	current	history1	history2
E2/Bruub	Color						no image
	Bottom					(\bigcirc)	no image
	GRAPHS						
	Ferrous Alloys			491,520	Particle Count		т2
	iron			101,320	, i i i i i i i i i i i i i i i i i i i		
c.	E 6 - nickel			122,880	Severe		-2
				30,720			+2
	2				Abnormal		
				7,680 S			+2
	Dec21/22			Jun9/23 . [per 1 m])		•	-1
	—	_		EZ/6un 1.920 1.020 1.			1
	Non-ferrous Metal	5					
	8 - copper			ing 120			-1
	Ctin			2 30			+2
					·	\	
ç	2				3-		-1
				53			-8
	Dec21/22			Jun9/23			
	ے Viscosity @ 40°C			0	4μ 6μ	14µ 21µ	38µ 71µ
	⁸⁰ T			0.03	Acid Number		
	75-			(B/HO			
	ට 70 ම දුන් බාදුන් ද			¥ 0.02	Rann		
				0.0 g	1- Dase		
				P 0.0	1+		
	50			0.00 P			
e e	c21/2			:2/6ur	c21/2.		
Laboratory Sample No. Lab Number	: WearCheck USA - 501 : USP241198	Madiso Recei Teste Diagr	ived : 12 ed : 14	2 Jun 2023 1 Jun 2023	Dec21/22	IGSEN COLD ST 17400 NE SAC P ⁱ	



Contact/Location: ANDREY BEREZHNOY - LINPORSAC

F: (503)252-5257