

### **OIL ANALYSIS REPORT**

# KAESER CSD 75T 5226700 (S/N 1046)

Component

Machine Ic

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

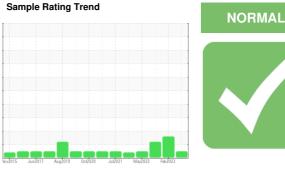

		Vov2015 Ju	in2017 Aug2019 Oct	2020 Jul2021 May2022	eb2023	
SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history 1	history 2
Sample Number		Client Info		KCPA003107	KCP54764	KCP49928
Sample Date		Client Info		14 Jun 2023	21 Feb 2023	10 Oct 2022
Machine Age	hrs	Client Info		33792	32589	30399
Oil Age	hrs	Client Info		0	4780	2410
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				NORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	9	10	9
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	<1	0	2
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		2	0	2
Zinc	ppm	ASTM D5185m		0	0	6
Sulfur	ppm	ASTM D5185m		17977	16497	20620
CONTAMINANTS	;	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		<1	0	<1
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.05	0.007	0.013	0.005
ppm Water	ppm	ASTM D6304	>500	75.7	136.3	57.2
FUUD CLEANUN	IESS	method	limit/hase	current	history 1	history 2


FLUID CLEANLINESS	method			history 1	history 2
Particles >4µm	ASTM D7647		1085	12682	2268
Particles >6µm	ASTM D7647	>1300	292	<b>A</b> 3101	779
Particles >14µm	ASTM D7647	>80	39	<b>A</b> 236	<b>9</b> 2
Particles >21µm	ASTM D7647	>20	17	<u> </u>	<u> </u>
Particles >38µm	ASTM D7647	>4	1	3	2
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>17/13	15/12	▲ 19/15	▲ 17/14
FLUID DEGRADATION	method	limit/base	current	history 1	history 2
Acid Number (AN) mg KOH/g	ASTM D8045	0.4	0.40	0.38	0.39


Acid Number (AN)


mg KOH/g ASTM D8045 0.4




## **OIL ANALYSIS REPORT**

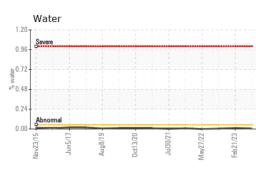

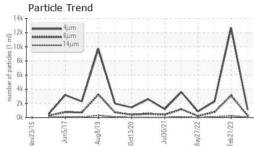


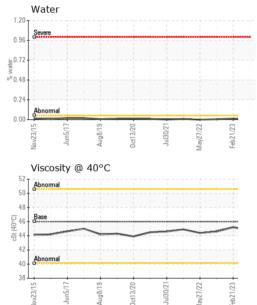

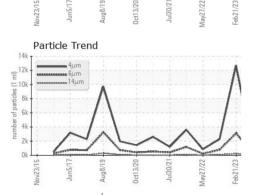

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	46	44.8	45.2	44.6
SAMPLE IMAGES		method	limit/base	current	history 1	history 2
Color						
				10 M	110 M	

Bottom

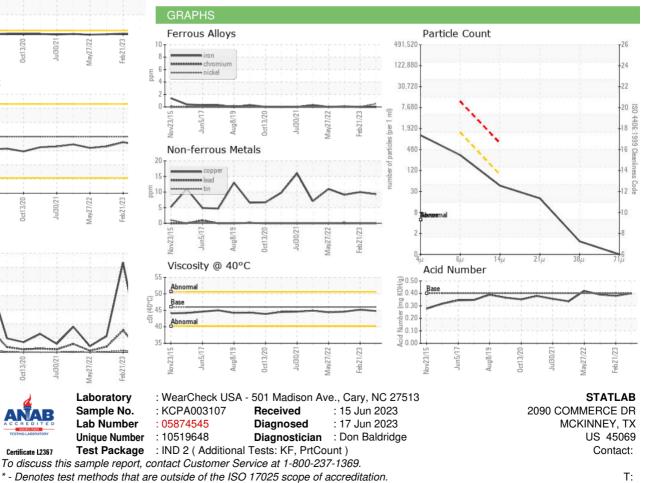

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Page 2 of 2

F: