




OIL ANALYSIS REPORT



Area
RIG 2
Machine Id
CATERPILLAR 3512 R2-G-01-NKL
Component
Diesel Engine
Fluid
CHEVRON 15W40 (--- GAL)

Sample Rating Trend

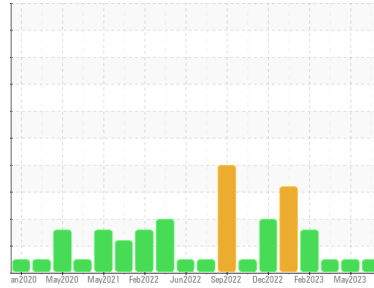

NORMAL



DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0004261	KL0012187	KL0009977
Sample Date	Client Info		01 Jun 2023	06 May 2023	30 Mar 2023
Machine Age	days	Client Info	45076	45049	45010
Oil Age	days	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	6	3	2
Chromium	ppm	ASTM D5185m >20	0	<1	<1
Nickel	ppm	ASTM D5185m >2	0	1	0
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	<1	5	2
Lead	ppm	ASTM D5185m >40	<1	1	0
Copper	ppm	ASTM D5185m >330	1	<1	<1
Tin	ppm	ASTM D5185m >15	0	1	0
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	322	384	396
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	130	128	125
Manganese	ppm	ASTM D5185m	<1	<1	1
Magnesium	ppm	ASTM D5185m	705	717	678
Calcium	ppm	ASTM D5185m	1673	1574	1539
Phosphorus	ppm	ASTM D5185m	711	755	707
Zinc	ppm	ASTM D5185m	892	905	847
Sulfur	ppm	ASTM D5185m	3074	3216	3062

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	10	17	6
Sodium	ppm	ASTM D5185m >50	1	1	1
Potassium	ppm	ASTM D5185m >20	<1	3	<1


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	8.6	5.5	5.0
Sulfation	Abs/1mm	*ASTM D7415 >30	23.6	23.2	20.8




OIL ANALYSIS REPORT


Particle Trend

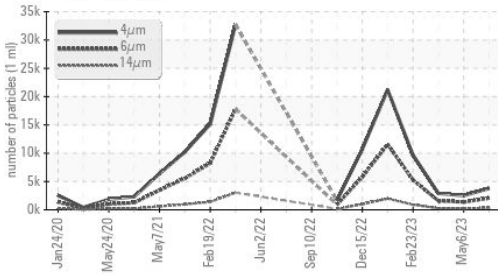


Base Number

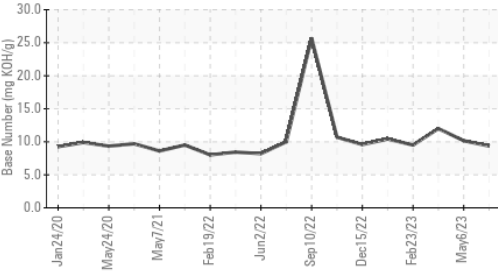

Viscosity @ 100°C

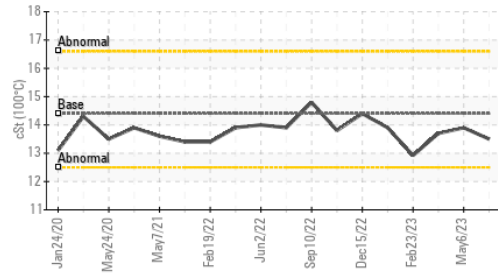

Particle Trend

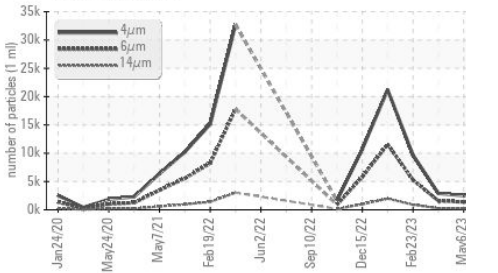

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		3793	2509	2897
Particles >6µm	ASTM D7647	>5000	2066	1367	1578
Particles >14µm	ASTM D7647	>640	352	233	269
Particles >21µm	ASTM D7647	>160	118	78	90
Particles >38µm	ASTM D7647	>40	18	12	14
Particles >71µm	ASTM D7647	>10	2	1	1
Oil Cleanliness	ISO 4406 (c)	>19/16	18/16	18/15	18/15


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	*ASTM D7414	>25	17.7	16.0	14.8
Base Number (BN)	mg KOH/g	ASTM D2896		9.36	10.16	12.00

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	13.9	13.7

GRAPHS


Ferrous Alloys

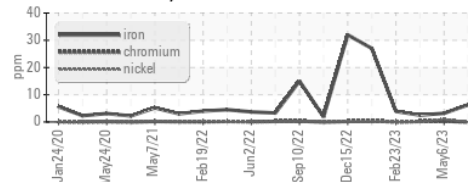


Non-ferrous Metals

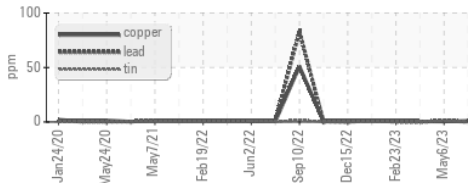


Viscosity @ 100°C

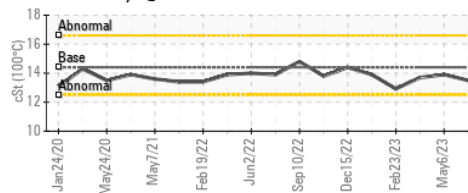

Particle Count

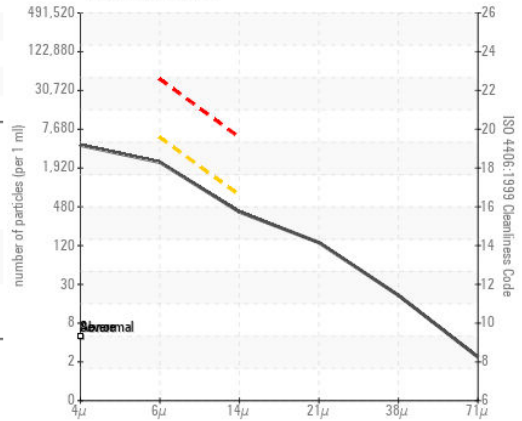

Base Number

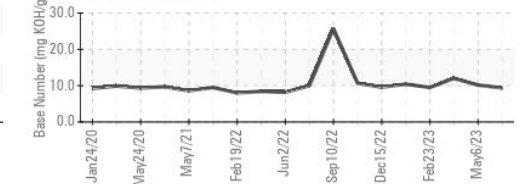

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KL0004261
 Lab Number : 05875046
 Unique Number : 10520149
 Test Package : MOB 2 (Additional Tests: PrtCount)

Received : 15 Jun 2023
 Diagnosed : 18 Jun 2023
 Diagnostician : Don Baldrige

CITADEL DRILLING
 7550 W 120
 ODESSA, TX
 US 79763

Contact: MIKE COMBDEN
 mcombden@citadelldrilling.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (780)955-5509

F: