


PROBLEM SUMMARY

Area INDIANA CROSSROADS II [46004111] Machine Id T08 (S/N W-124715) Component

New (Unused) Oil

FUCHS RENOLIN CLP ISO 320 (--- LTR)

COMPONENT CONDITION SUMMARY

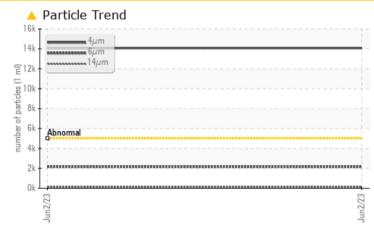

RECOMMENDATION

This is a baseline read-out on the submitted sample.

PROBLEMATIC TEST RESULTS						
Sample Status			ABNORMAL			
Particles >4µm	ASTM D7647	>5000	<u> </u>			
Particles >6µm	ASTM D7647	>1300	🔺 2159			
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<u> </u>			


Customer Id: NORDEX Sample No.: NX013299 Lab Number: 05878508 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 <u>jhester@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

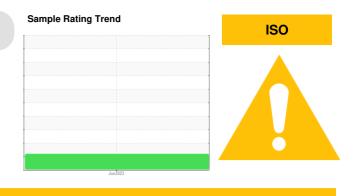

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Number

hrs

hrs

Sample Date

Machine Age

Oil Changed

Sample Status

Oil Age

INDIANA CROSSROADS II [46004111] T08 (S/N W-124715) Componen

New (Unused) Oil Fluid

FUCHS RENOLIN CLP ISO 320 (--- LTR)


DIAGNOSIS

Recommendation

This is a baseline read-out on the submitted sample.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

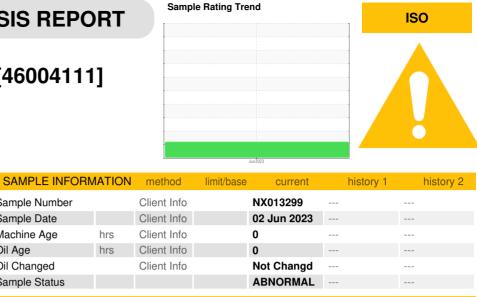

WEAR METALS		method	limit/base	current	history 1	history 2
PQ		ASTM D8184	>80	12		
Iron	ppm	ASTM D5185m	>150	2		
Chromium	ppm	ASTM D5185m	>5	<1		
Nickel	ppm	ASTM D5185m	>10	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>5	<1		
Aluminum	ppm	ASTM D5185m	>10	<1		
Lead	ppm	ASTM D5185m	>20	1		
Copper	ppm	ASTM D5185m	>50	<1		
Tin	ppm	ASTM D5185m	>5	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		

ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m		13		
Barium	ppm	ASTM D5185m		<1		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		6		
Calcium	ppm	ASTM D5185m		25		
Phosphorus	ppm	ASTM D5185m		238		
Zinc	ppm	ASTM D5185m		5		
Sulfur	ppm	ASTM D5185m		6295		
CONTAMINANTS	;	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>50	6		
Sodium	ppm	ASTM D5185m	>20	2		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>0.05	0.005		
ppm Water	ppm	ASTM D6304	>500	50.7		

FLUID CLEANLINESS	method	limit/base	current	history 1	history 2
Particles >4µm	ASTM D7647	>5000	4 14071		
Particles >6µm	ASTM D7647	>1300	<u> </u>		
Particles >14µm	ASTM D7647	>160	118		
Particles >21µm	ASTM D7647	>40	26		
Particles >38µm	ASTM D7647	>10	1		
Particles >71µm	ASTM D7647	>3	1		
Oil Cleanliness	ISO 4406 (c)	>19/17/14	A 21/18/14		

limit/base

FLUID DEGRADATION Acid Number (AN)

mg KOH/g ASTM D8045

method

0.38

current

Contact/Location: KEVIN REGAN - NORDEX


history 1

history 2

Report Id: NORDEX [WUSCAR] 05878508 (Generated: 07/11/2023 09:31:17) Rev: 1



OIL ANALYSIS REPORT

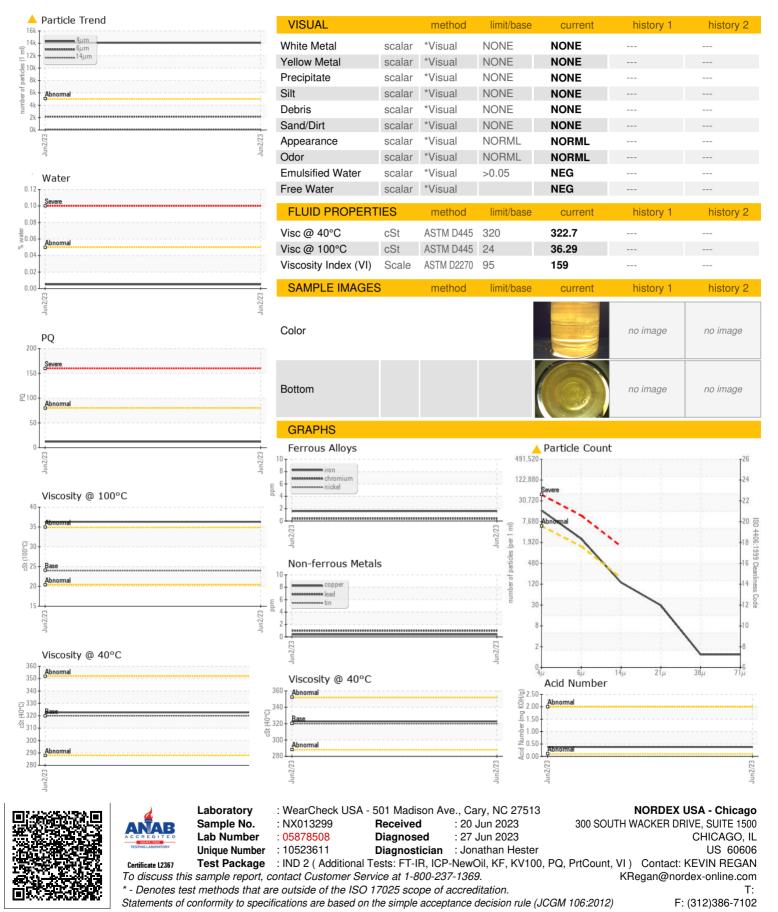

Contact/Location: KEVIN REGAN - NORDEX