



# PROBLEM SUMMARY

Sample Rating Trend


ISO

Area  
**INDIANA CROSSROADS II [46004111]**  
 Machine Id  
**T14 (S/N W-124771)**  
 Component  
**New (Unused) Oil**  
 Fluid  
**FUCHS RENOLIN CLP ISO 320 (--- LTR)**



## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

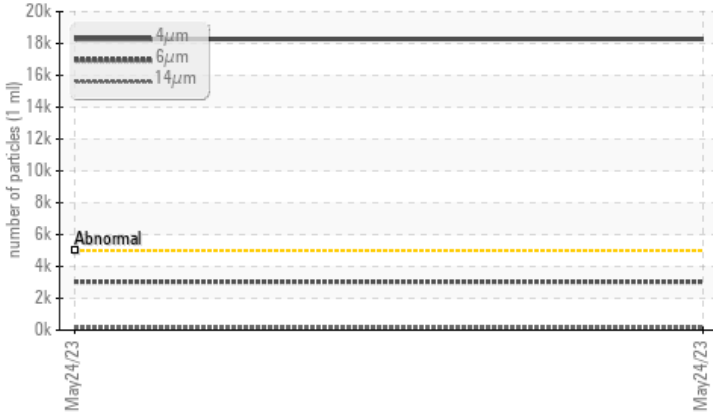

## RECOMMENDATION

This is a baseline read-out on the submitted sample.

## PROBLEMATIC TEST RESULTS

Sample Status			<b>ABNORMAL</b>	---	---
Particles >4µm	ASTM D7647	>5000	▲ <b>18282</b>	---	---
Particles >6µm	ASTM D7647	>1300	▲ <b>3038</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>21/19/14</b>	---	---

Customer Id: NORDEX  
 Sample No.: NX013301  
 Lab Number: 05878510  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Area  
**INDIANA CROSSROADS II [46004111]**

Machine Id  
**T14 (S/N W-124771)**

Component  
**New (Unused) Oil**

Fluid  
**FUCHS RENOLIN CLP ISO 320 (--- LTR)**



## DIAGNOSIS

### ▲ Recommendation

This is a baseline read-out on the submitted sample.

### ▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

SAMPLE INFORMATION	method	limit/base	current	history 1	history 2
Sample Number	Client Info		<b>NX013301</b>	---	---
Sample Date	Client Info		<b>24 May 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Not Changed</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

WEAR METALS	method	limit/base	current	history 1	history 2
PQ	ASTM D8184	>80	<b>15</b>	---	---
Iron	ppm	ASTM D5185m	>150	<b>2</b>	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---
Silver	ppm	ASTM D5185m	>5	<b>0</b>	---
Aluminum	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---
Lead	ppm	ASTM D5185m	>20	<b>1</b>	---
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	---
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	---

ADDITIVES	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m		<b>14</b>	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---
Magnesium	ppm	ASTM D5185m		<b>5</b>	---
Calcium	ppm	ASTM D5185m		<b>22</b>	---
Phosphorus	ppm	ASTM D5185m		<b>238</b>	---
Zinc	ppm	ASTM D5185m		<b>3</b>	---
Sulfur	ppm	ASTM D5185m		<b>6221</b>	---






CONTAMINANTS	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>50	<b>6</b>	---
Sodium	ppm	ASTM D5185m	>20	<b>2</b>	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---
Water	%	ASTM D6304	>0.05	<b>0.007</b>	---
ppm Water	ppm	ASTM D6304	>500	<b>72.8</b>	---

FLUID CLEANLINESS	method	limit/base	current	history 1	history 2
Particles >4µm	ASTM D7647	>5000	▲ <b>18282</b>	---	---
Particles >6µm	ASTM D7647	>1300	▲ <b>3038</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>145</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>22</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>0</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>21/19/14</b>	---	---

FLUID DEGRADATION	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.38</b>	---	---



# OIL ANALYSIS REPORT

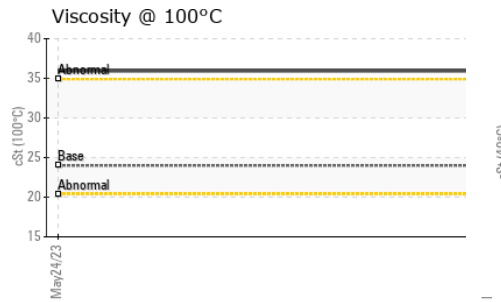
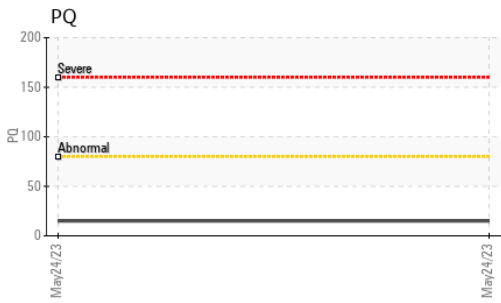
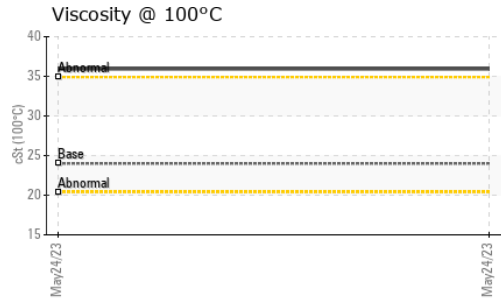
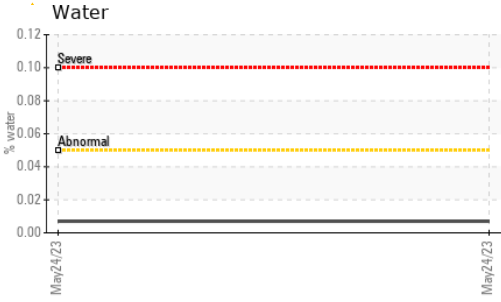
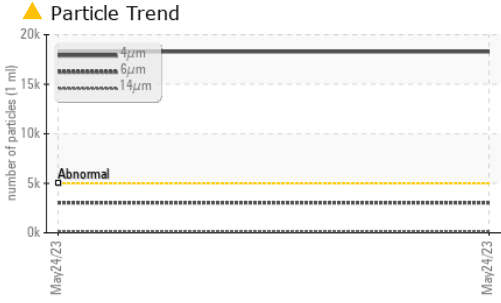


VISUAL	method	limit/base	current	history 1	history 2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 40°C	cSt	ASTM D445	320	323.0	---	---
Visc @ 100°C	cSt	ASTM D445	24	35.94	---	---
Viscosity Index (VI)	Scale	ASTM D2270	95	158	---	---

SAMPLE IMAGES	method	limit/base	current	history 1	history 2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

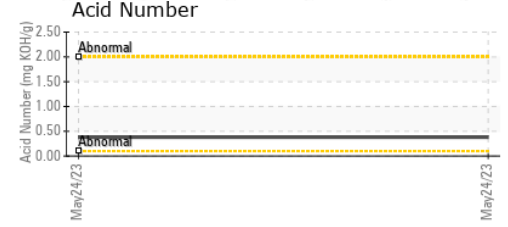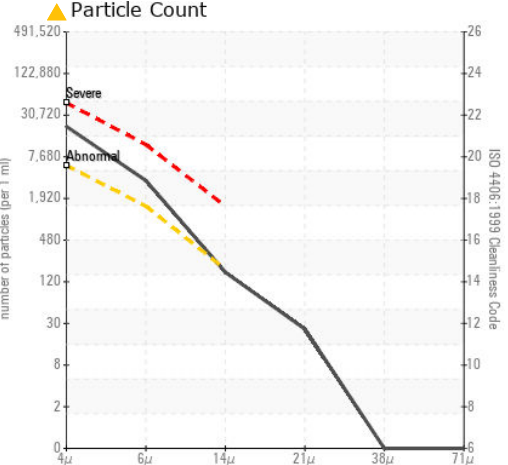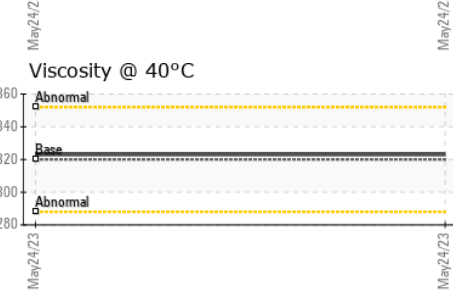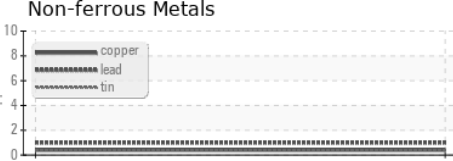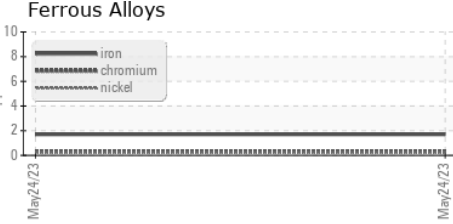

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : NX013301 **Received** : 20 Jun 2023  
**Lab Number** : 05878510 **Diagnosed** : 27 Jun 2023  
**Unique Number** : 10523613 **Diagnostician** : Jonathan Hester

**NORDEX USA - Chicago**  
 300 SOUTH WACKER DRIVE, SUITE 1500  
 CHICAGO, IL  
 US 60606  
 Contact: KEVIN REGAN  
 KRegan@nordex-online.com

**Test Package** : IND 2 ( Additional Tests: FT-IR, ICP-NewOil, KF, KV100, PQ, PrtCount, VI )  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)