




PROBLEM SUMMARY

Sample Rating Trend

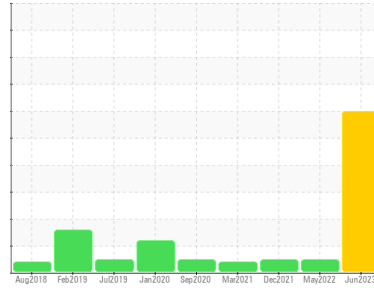

WATER




Machine Id
KAESER AS 30 6142903 (S/N 1053)

Component
Compressor


Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Water

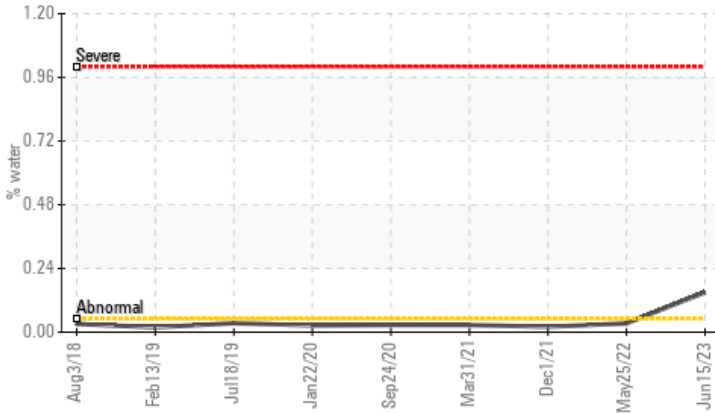

▲ Particle Trend

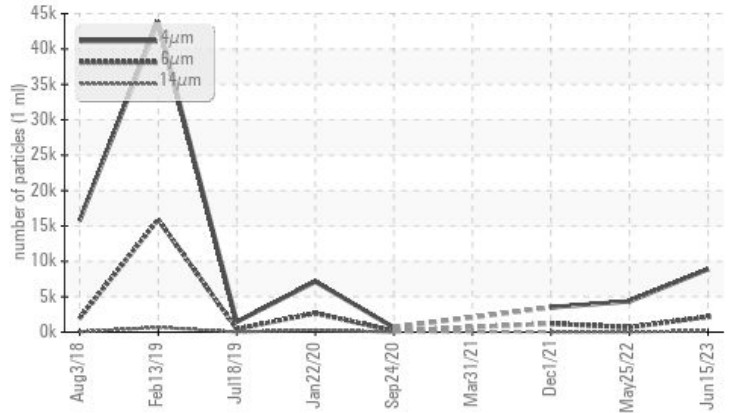

RECOMMENDATION

The filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	NORMAL	NORMAL
Water	%	ASTM D6304	>0.05	▲ 0.150	0.033	0.020
ppm Water	ppm	ASTM D6304	>500	▲ 1500	339.5	208.5
Particles >6µm		ASTM D7647	>1300	▲ 2162	671	1217
Particles >14µm		ASTM D7647	>80	▲ 171	35	37
Particles >21µm		ASTM D7647	>20	▲ 37	11	6
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ 20/18/15	19/17/12	17/12
Debris	scalar	*Visual	NONE	▲ MODER	NONE	NONE
Appearance	scalar	*Visual	NORML	▲ HAZY	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	▲ 0.2%	NEG	NEG
Free Water	scalar	*Visual		▲ 1.0	NEG	NEG

Customer Id: SOUEAR
Sample No.: KCPA003479
Lab Number: 05878984
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Alert	---	---	?	We were unable to perform a particle count due to a high concentration of particles present in this sample.

HISTORICAL DIAGNOSIS

25 May 2022 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



01 Dec 2021 Diag: Angela Borella

NORMAL



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



31 Mar 2021 Diag: Doug Bogart

VIS DEBRIS




No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



Machine Id
KAESER AS 30 6142903 (S/N 1053)

Component
Compressor
Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

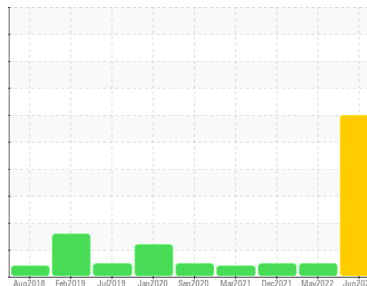

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil. There is a light concentration of water present in the oil. Free water present.

Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KCPA003479	KC104277	KC96008
Sample Date	Client Info		15 Jun 2023	25 May 2022	01 Dec 2021
Machine Age	hrs	Client Info	10205	9416	8708
Oil Age	hrs	Client Info	0	900	2100
Oil Changed	Client Info		N/A	Changed	Changed
Sample Status			ABNORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	0	0	<1
Chromium	ppm	ASTM D5185m >10	0	0	0
Nickel	ppm	ASTM D5185m >3	0	0	0
Titanium	ppm	ASTM D5185m >3	0	0	0
Silver	ppm	ASTM D5185m >2	0	<1	<1
Aluminum	ppm	ASTM D5185m >10	0	<1	<1
Lead	ppm	ASTM D5185m >10	<1	0	0
Copper	ppm	ASTM D5185m >50	10	1	3
Tin	ppm	ASTM D5185m >10	<1	<1	<1
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	<1	17
Barium	ppm	ASTM D5185m 90	2	31	0
Molybdenum	ppm	ASTM D5185m 0	0	0	0
Manganese	ppm	ASTM D5185m	0	0	0
Magnesium	ppm	ASTM D5185m 100	39	78	71
Calcium	ppm	ASTM D5185m 0	<1	2	1
Phosphorus	ppm	ASTM D5185m 0	2	3	<1
Zinc	ppm	ASTM D5185m 0	10	2	0
Sulfur	ppm	ASTM D5185m 23500	21448	17540	16053

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	0	0	0
Sodium	ppm	ASTM D5185m	3	14	27
Potassium	ppm	ASTM D5185m >20	2	<1	2
Water	%	ASTM D6304 >0.05	▲ 0.150	0.033	0.020
ppm Water	ppm	ASTM D6304 >500	▲ 1500	339.5	208.5






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		8896	4354	3502
Particles >6µm	ASTM D7647	>1300	▲ 2162	671	1217
Particles >14µm	ASTM D7647	>80	▲ 171	35	37
Particles >21µm	ASTM D7647	>20	▲ 37	11	6
Particles >38µm	ASTM D7647	>4	1	1	0
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 20/18/15	19/17/12	17/12

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	0.30	0.36	0.274

OIL ANALYSIS REPORT

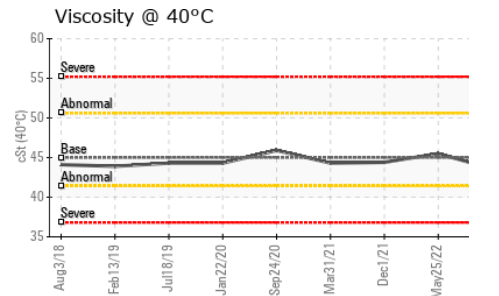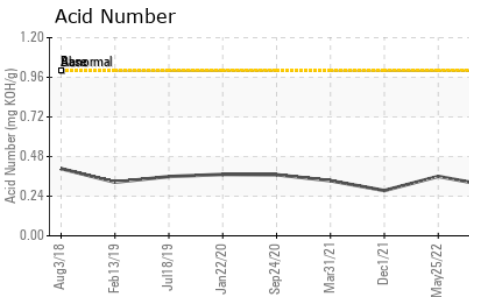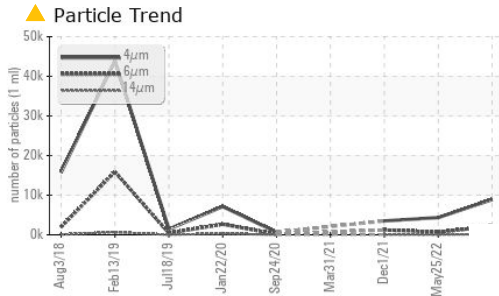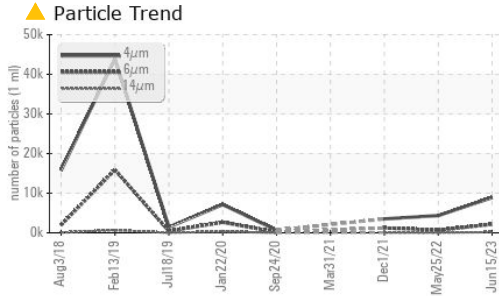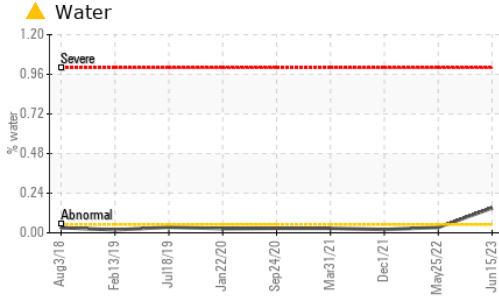






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	▲ MODER	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	▲ HAZY	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	▲ 0.2%	NEG
Free Water	scalar	*Visual		▲ 1.0	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	43.6	45.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					



GRAPHS

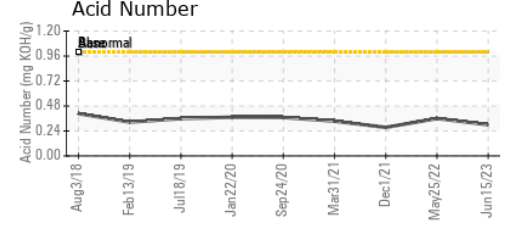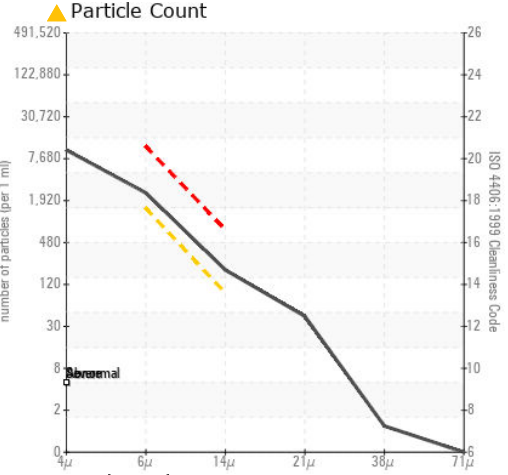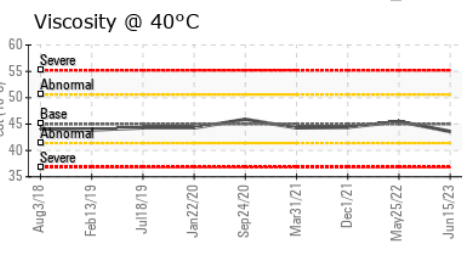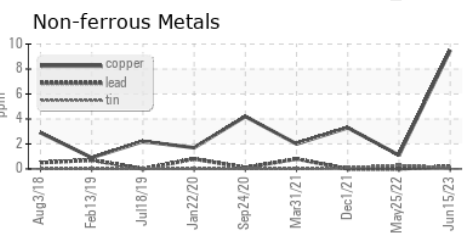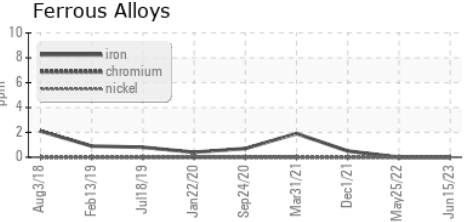

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA003479 **Received** : 20 Jun 2023
Lab Number : 05878984 **Diagnosed** : 22 Jun 2023
Unique Number : 10524087 **Diagnostician** : Don Baldrige

SOUTHWEST PLASTIC BINDING
 13878 PARKS STEED DR
 EARTH CITY, MO
 US 63045
 Contact: SANDY KRISHER
 sandy.krisher@swbindinglaminating.com

Test Package : IND 2 (Additional Tests: KF, PrtCount)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: