




# OIL ANALYSIS REPORT



Area  
**OKLAHOMA/3**  
Machine Id  
**48.88L [OKLAHOMA^3]**  
Component  
**Diesel Engine**  
Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (10 GAL)**

Sample Rating Trend

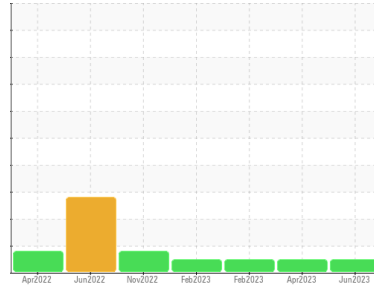

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		<b>WC0808112</b>	WC0808008	WC0792554
Sample Date	Client Info		<b>05 Jun 2023</b>	28 Apr 2023	28 Feb 2023
Machine Age	hrs	Client Info	<b>6563</b>	6223	5899
Oil Age	hrs	Client Info	<b>6223</b>	5899	5678
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >75	<b>6</b>	13	6
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >54	<b>1</b>	0	2
Lead	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	<1
Copper	ppm	ASTM D5185m >240	<b>2</b>	9	9
Tin	ppm	ASTM D5185m >5	<b>0</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 0	<b>42</b>	32	51
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>40</b>	42	40
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 0	<b>522</b>	517	464
Calcium	ppm	ASTM D5185m	<b>1722</b>	1660	1622
Phosphorus	ppm	ASTM D5185m	<b>775</b>	764	725
Zinc	ppm	ASTM D5185m	<b>929</b>	925	883
Sulfur	ppm	ASTM D5185m	<b>3077</b>	3096	2401

## CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >35	<b>4</b>	5	4
Sodium	ppm	ASTM D5185m	<b>2</b>	4	2
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	1

## INFRA-RED



	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.7</b>	8.0	6.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.6</b>	22.5	22.2

## FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.2</b>	21.0	19.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	<b>10.3</b>	9.7	10.0







# OIL ANALYSIS REPORT

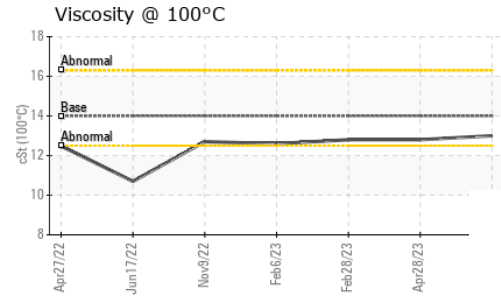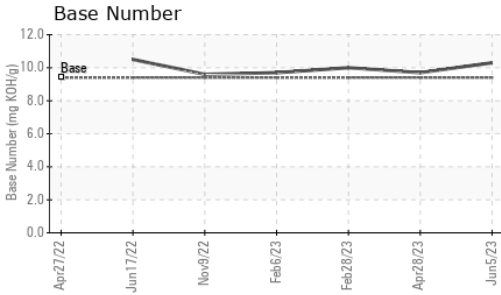

PARAMETER	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445 14	<b>13.0</b>	12.8	12.8

## GRAPHS

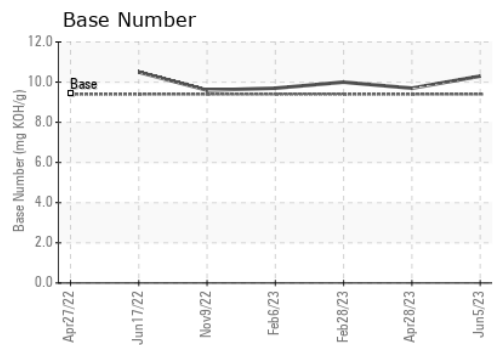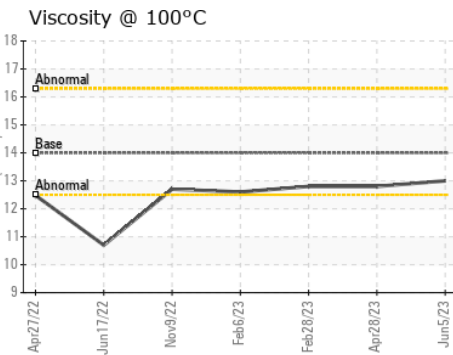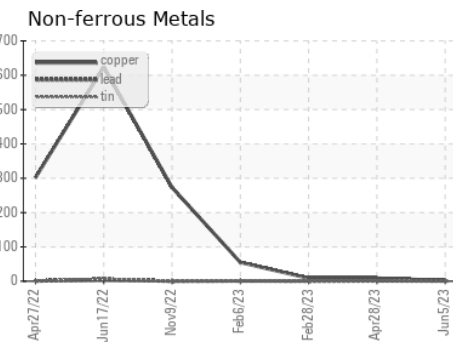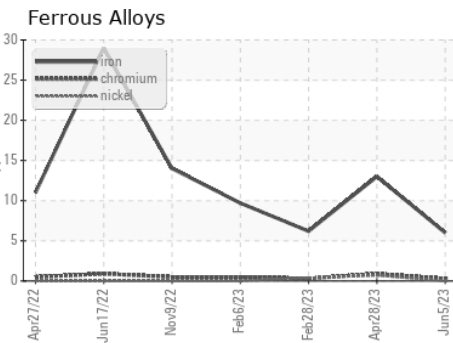

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0808112 **Received** : 21 Jun 2023  
**Lab Number** : 05879358 **Diagnosed** : 22 Jun 2023  
**Unique Number** : 10524461 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: SHAWN SOUTH  
 shawn.south@sherwood.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:

F: x: